



EZPAN™



More options, same incredible energy savings and price.

The affordable, ultra-low-profile LED panel is available in 2'x2', 2'x4' and now 1'x4'.




RAB | Indoor

Edge-Lit LED Panels



- Ultra efficient, up to 124 lm/W, reducing energy costs by up to 73%
- Perfect for shallow plenums
- Even and diffuse ambient illumination, ideal for spaces where glare-free lighting is required
- Offered in three sizes and five wattages: 1x4 (17W, 30W and 40W), 2x2 (17W, 30W and 40W) and 2x4 (30W, 40W and 50W)
- 0-10V dimmable driver, standard
- Emergency battery backup option available
- Available with factory-installed Lightcloud® lighting control system Controller

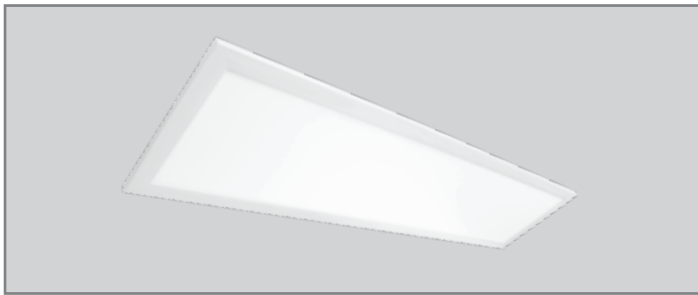

New size, additional power packages.

The EZPAN is now available as a 1x4, with 17W, 30W and 40W models. That's in addition to the existing 2x2 (17W, 30W and 40W) and 2x4 (30W, 40W and 50W) models.




Installs are a cinch.

An NEC-compliant junction box with flying leads makes wiring as simple as twisting a few wire nuts, and integral T-bar clips secure EZPAN to standard T-bar systems.



It's OK to be shallow.

With a height just under 2", the EZPAN is an ideal solution for shallow plenums.

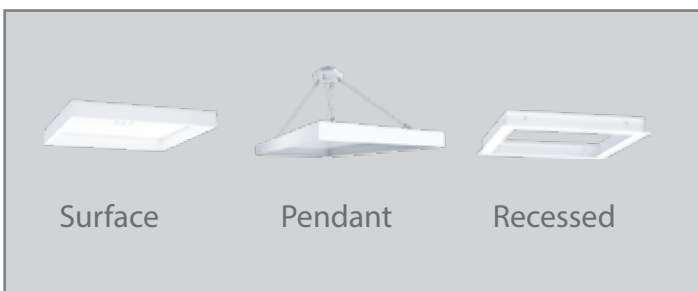


Maximized versatility.

Three EZPAN mounting kits cover all application needs: surface, pendant and recessed mounting.

Performance

2 x 4 (50W) - 5000K: 5270 lumens, 115 lm/W	4000K: 5297 lumens, 110 lm/W	3500K: 5348 lumens, 116 lm/W	3000K: 5473 lumens, 115 lm/W
2 x 4 (40W) - 5000K: 4692 lumens, 119 lm/W	4000K: 4465 lumens, 112 lm/W	3500K: 4741 lumens, 120 lm/W	3000K: 4682 lumens, 117 lm/W
2 x 4 (30W) - 5000K: 3433 lumens, 118 lm/W	4000K: 3662 lumens, 122 lm/W	3500K: 3469 lumens, 119 lm/W	3000K: 3426 lumens, 116 lm/W
2 x 2 (40W) - 5000K: 4724 lumens, 116 lm/W	4000K: 4626 lumens, 117 lm/W	3500K: 4218 lumens, 104 lm/W	3000K: 3994 lumens, 99 lm/W
2 x 2 (30W) - 5000K: 3110 lumens, 104 lm/W	4000K: 3317 lumens, 113 lm/W	3500K: 3434 lumens, 115 lm/W	3000K: 3276 lumens, 111 lm/W
2 x 2 (17W) - 5000K: 2147 lumens, 116 lm/W	4000K: 2001 lumens, 110 lm/W	3500K: 2011 lumens, 109 lm/W	3000K: 2065 lumens, 115 lm/W
1 x 4 (40W) - 5000K: 5114 lumens, 124 lm/W	4000K: 5062 lumens, 122 lm/W	3500K: 4577 lumens, 111 lm/W	3000K: 4601 lumens, 111 lm/W
1 x 4 (30W) - 5000K: 3454 lumens, 116 lm/W	4000K: 3419 lumens, 114 lm/W	3500K: 3228 lumens, 111 lm/W	3000K: 3289 lumens, 111 lm/W
1 x 4 (17W) - 5000K: 2151 lumens, 116 lm/W	4000K: 2129 lumens, 113 lm/W	3500K: 2053 lumens, 112 lm/W	3000K: 2048 lumens, 110 lm/W

Dimensions and weight

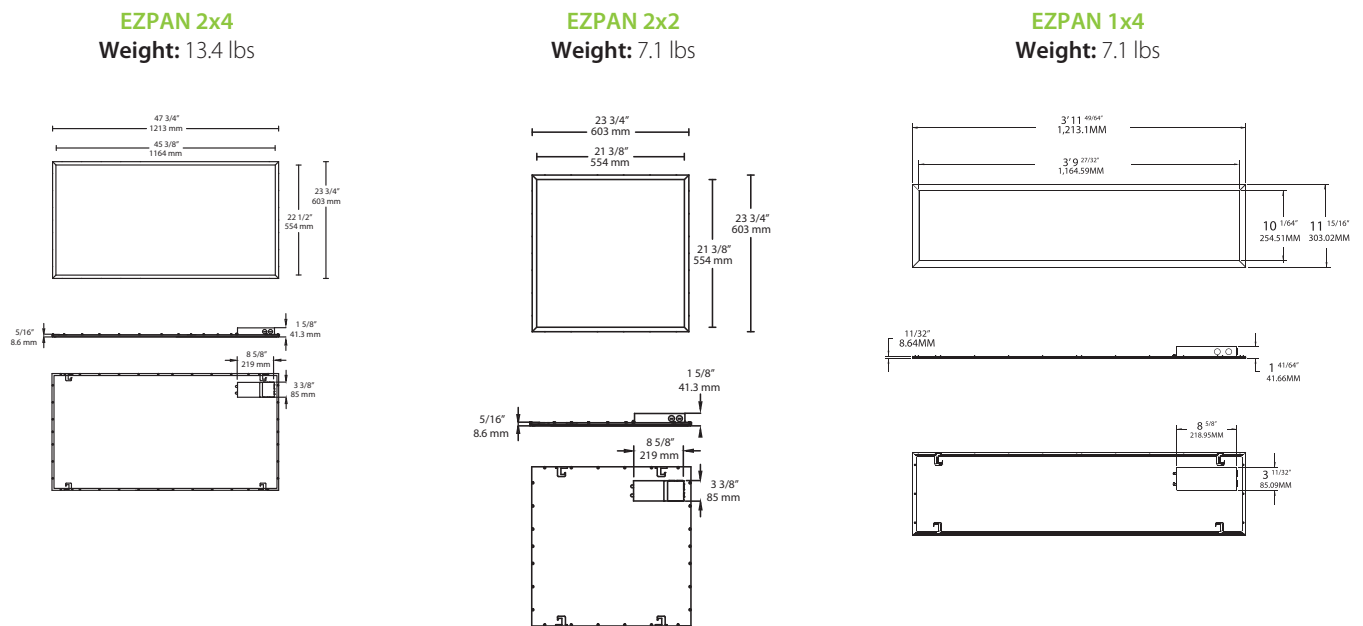

EZPAN™ Specifications

UL Listing: Suitable for damp locations

IC Rating: Suitable for insulated ceilings

LEDs: Long-life, high efficiency, micro-power, surface mount LEDs

Color Consistency: 5-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

50W (2x4): 0.41A @ 120V; 0.24A @ 208V; 0.21A @ 240V; 18A @ 277V

40W (2x4): 0.35A @ 120V; 0.21A @ 208V; 0.18A @ 240V; 0.16A @ 277V

30W (2x4): 0.25A @ 120V; 0.15A @ 208V; 0.13A @ 240V; 0.11A @ 277V

40W (2x2): 0.35A @ 120V; 0.21A @ 208V; 0.18A @ 240V; 0.16A @ 277V

30W (2x2): 0.25A @ 120V; 0.15A @ 208V; 0.13A @ 240V; 0.11A @ 277V

17W (2x2): 0.15A @ 120V; 0.10A @ 208V; 0.09A @ 240V; 0.07A @ 277V

40W (1x4): 0.32A @ 120V; 0.21A @ 208V; 0.18A @ 240V; 0.15A @ 277V

30W (1x4): 0.24A @ 120V; 0.15A @ 208V; 0.13A @ 240V; 0.11A @ 277V

17W (1x4): 0.14A @ 120V; 0.10A @ 208V; 0.08A @ 240V; 0.07A @ 277V

Lifespan: At 12 hours daily use, RAB LEDs are rated to last over 13 years

Dimming: 0-10V dimmable driver, standard

Ambient Temperature: Suitable for use in 50°C ambient temperatures

Housing: Lightweight aluminum housing, steel pan and junction box

Lens: Frosted polystyrene

Installation: Standard integral T-bar clips secure the fixture to T-bars and prevent T-system separation.


Finish: Our environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color, and contain no VOC or toxic heavy metals.

Green Technology: Mercury and UV free. RoHS-compliant components.

Mounting Accessory Kits


Surface Mount Kits

- SMKEZPAN2X2 - 2x2 Surface Mount Kit
- SMKEZPAN2X4 - 2x4 Surface Mount Kit
- SMKEZPAN1X4 - 1x4 Surface Mount Kit

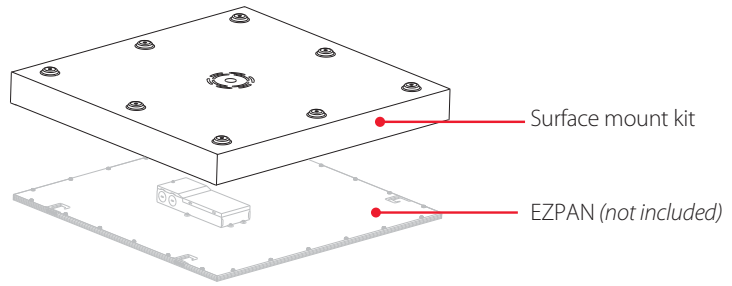


Pendant Mount Kits

- PMKEZPAN2X2 - 2x2 Pendant Mount Kit
- PMKEZPAN2X4 - 2x4 Pendant Mount Kit
- PMKEZPAN1X4 - 1x4 Pendant Mount Kit

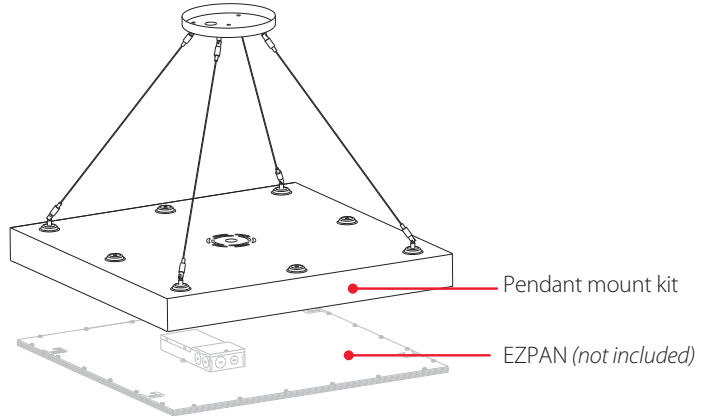

Recessed Drywall Mounting Kits

- RMKPANEL2X2 - 2x2 Recessed Mounting Kit
- RMKPANEL2X4 - 2x4 Recessed Mounting Kit
- RMKPANEL1X4 - 1x4 Recessed Mounting Kit

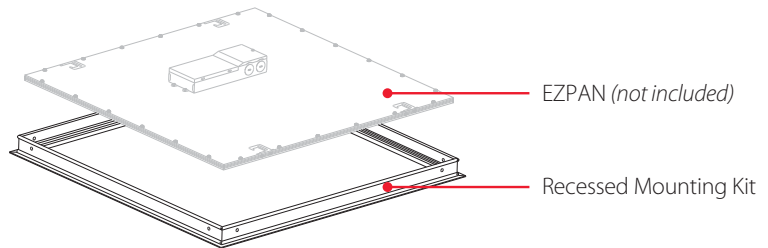

Ordering information

Product Family	Size	Wattage	Color Temp.	Dimming (standard)	Control Options	Other Options
EZPAN				/D10		
2X4	2' x 4'	50	50W (2' x 4')	/D10	Blank	Blank
2X2	2' x 2'	40	40W (2'X4', 2'x2', 1'X4')	0-10V Dimming	No sensor	None
1X4	1' x 4'	30	30W (2'X4', 2' x 2', 1'x4')		/LC Lightcloud Controller	/E2 Emergency Battery Backup
		17	17W (2'X2', 1'x 4')			
			Blank			
			N			
			YN			
			Y			

Product Family	Size
SMKEZPAN	

Surface Mount Kit

- 2X4** 2' x 4'
- 2X2** 2' x 2'
- 1X4** 1' x 4'

Product Family	Size
PMKEZPAN	

Pendant Mount Kit

- 2X4** 2' x 4'
- 2X2** 2' x 2'
- 1X4** 1' x 4'

Product Family	Size
RMKPANEL	

Recessed Mount Kit

- 2X4** 2' x 4'
- 2X2** 2' x 2'
- 1X4** 1' x 4'