

"LES" is even more than before.

2X13W LESLIE® delivers wide coverage and surprising value.



RAB

Outdoor



LESLIE 2x13

- Equivalent to two 75W halogen BR30 wide floods
- Wide 6H x 6V distribution
- Diffused lens for smooth, even light distribution
- Sensor with 180° detection pattern at up to 30 ft.
- Time settings from 5 seconds to 15 minutes
- Adjustable photo and motion sensitivity

Specifications

FLOODLIGHTS

UL Listing: Suitable for wet locations. Suitable for mounting within 4 feet of the ground.

LEDs: Long-life, high-efficiency surface mount LEDs

Driver: 120V driver, 50/60 Hz, 0.22A

LESLIE2X13:

Color Temperature	5000K	4000K	3000K
Input Watts	27	26	27
Output Lumens	2338	2276	2090
Efficacy (lm/W)	87	87	79
Color Accuracy (CRI)	83	83	83

Cold Weather Starting: The minimum starting temperature is -40° C.

Ambient Temperature: Suitable for use in 40°C ambient temperatures.

Housing: Precision die-cast aluminum housing, lens frame and mounting arm

Reflector: Vacuum-metalized polycarbonate

Lens: Diffused glass for smooth, even light distribution

Gaskets: High-temperature silicone

Finish: Our environmentally friendly polyester powder coatings are formulated for high durability and long-lasting color, and contain no VOC or toxic heavy metals.

Green Technology: Mercury and UV free. RoHS-compliant components.

SENSOR

Switching Capacity: 500 Watts of LED

Voltage: 120VAC, 60 Hz.

Sensor Power Consumption (when idle): 1 Watt

Time Adjustment: 5 seconds to 15 minutes

Sensor LED: Sensor indicator LED glows red day & night for "on guard" deterrence

Surge Protection: Withstands up to 3000 Volts

"No Hands" Auto Testing: Auto mode starts after 4 minutes of testing. No adjustment needed.

Manual Override: Double flip wall switch logic prevents activation by momentary power outages. Override resets to auto at dawn. No extra wiring needed. 8-hour reset.

RF Immunity: Circuits fully shielded for maximum radio frequency immunity


Photoelectric Control: Deactivates lights during daylight. Fully adjustable for 24-hour operation or custom applications.

Adjustments: Time, ambient light & sensitivity


Photometrics & Detection Pattern

LESLIE 2X13 Mounted at 10 ft.

Aimed 45° below horizontal, 30° either side of center

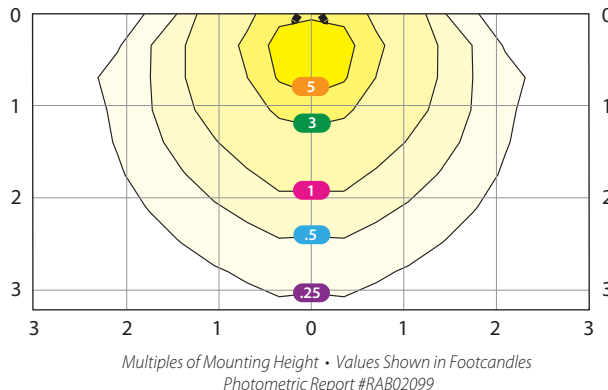


SMS500 - 180° coverage

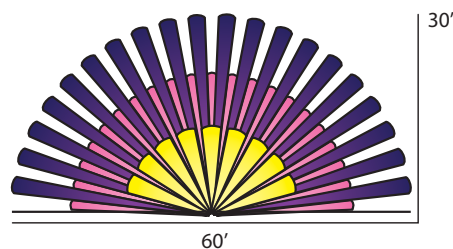

Dimensions

Weight: 7 lbs.

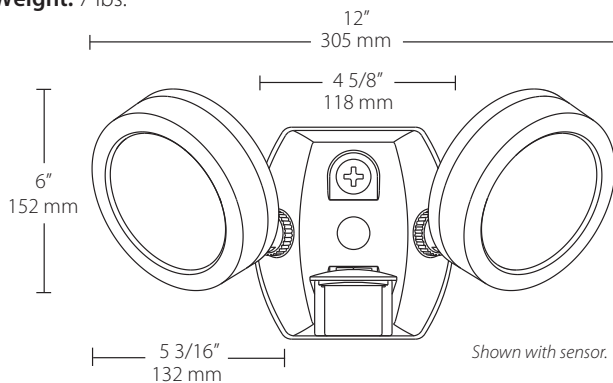

Ordering Information

Product Family	Wattage	Color Temp	Finish
LES Without sensor	2X13	Blank 5000K	Blank Bronze
SMSLES With sensor		N 4000K	W White
		Y 3000K	B Black*
			VG Verde Green*

*Not available with sensor.