

The choice is yours...



RAB[®]
LIGHTING
RABWEB.COM • 888 722-1000

...in new Signature colors!

- 13 and 26 Watt high-performance LEDs
- Available in 11 high-durability powder coatings, formulated for long-lasting color
- Choose from 5 different arms and 6 shades
- Standard (6 weeks) or expedited (3 weeks) delivery
- Reduces relamping time and costs
- 13W replaces 75W incandescent, 50W MH or 18W CFL
- 26W replaces 120W incandescent, 75W MH or 42W CFL
- 100,000-Hour LED lifespan
- 5-Year no-compromise warranty



Classic Colors



Black (B)



Architectural Bronze (A)



White (W)

Signature Colors



Red (R)



Yellow (YL)



Light Blue (LB)



Royal Blue (BL)



Brown (BWN)



Ivory (I)



Hunter Green (G)



Metallic Silver (S)

Contact your local RAB rep to view actual sample color chips.

Specifications

UL Listing

Suitable for wet locations. Suitable for mounting within 4' of the ground.

LED

Multi-chip, high-output, long-life LED

Drivers

13W: Constant Current, Class 2, 50/60 Hz, 100 - 240VAC: 0.3 - 0.15A, 277VAC: 0.15A, THD ≤20%, PF 97.5%

26W: Constant Current, Class 2, 50/60 Hz, 0.48 A., THD ≤20%, PF 97.9%

Angled Cone Shade, White Finish, Neutral Light

Nominal Watts	13W	26W
Input Watts @ 120V	15.4	28.9
Output Lumens*	705	1673
Lumens per Watt*	45.8	57.9
Color Accuracy (CRI)*	86	84
Correlated Color Temp. (Nominal CCT)*	4000K	4000K

Cold Weather Starting

Minimum starting temperature is -40°F / -40°C

Thermal Management

Custom heat sink assembly in thermal contact with die-cast aluminum housing for superior heat sinking

Housing

Precision die-cast aluminum housing, lens frame and mounting plate

Reflector

Optional rectangular or spot reflectors available

Gaskets

High-temperature silicone

Mounting

Heavy-duty mounting arm with "O" ring seal & stainless steel screw

Shades

Angled Cone, Angled Dome or Straight Shade offered in both 11" and 15'

Paint Finish

Chip and fade resistant polyester powder coat finish. Offers significantly improved gloss retention and resistance to color change.

Color Stability

RAB LEDs exceed industry standards for chromatic stability

Color Uniformity

RAB's range of CCT (Correlated Color Temperature) follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2011.

IESNA LM-79 & LM-80 Testing

RAB LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80, and have received the Department of Energy "Lighting Facts" label.

California Title 24

Goosenecks comply with 2013 California Title 24 building and electrical codes as commercial, outdoor, non-pole-mounted fixtures < 30 Watts when used with a photosensor control. Select catalog number PCS900 (120V) or PCS900/277 to order a photosensor.

Green Technology

Mercury and UV free, and RoHS compliant. Powder coat finish formulated with an environmentally friendly, TGIC-free (Triglycidyl Isocyanurate) process.


Patents

The design of the GNLED is protected by patents pending in US, Canada, China, Taiwan and Mexico.

* Please visit rabweb.com for details on warm temperature performance.

Photometrics

Three 13W LEDs at 15' Mounting Height

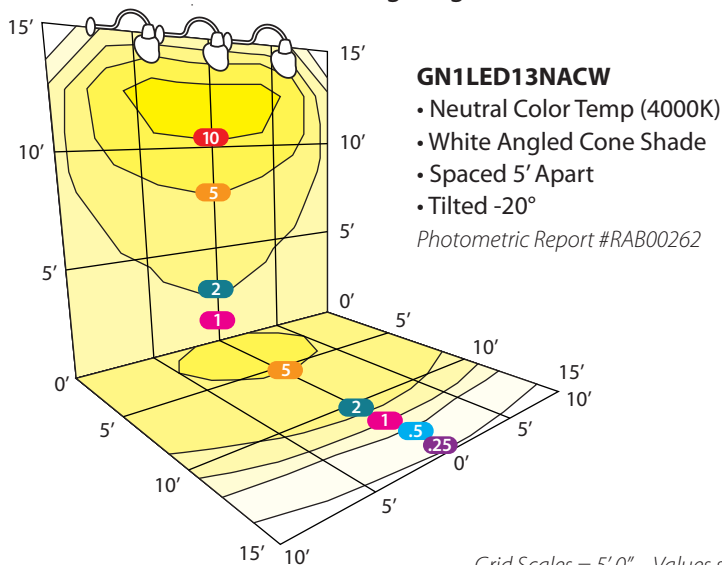

Three 26W LEDs at 15' Mounting Height

