

Round poles quick reference guide

Color: Bronze powder coating
 Construction: Steel
 CSA Listed: Suitable for wet locations
 Shaft: 46,000 p.s.i. minimum yield
 Base Plates: 36,000 p.s.i. minimum yield
 Hand holes: Reinforced with grounding lug and removable cover



Drilled Poles


ROUND

SKU	Height	Gauge	Wall Thickness	Shaft Diameter	At 90MPH Wind Speed*			Anchor Bolts	Base/Cap Cover
					Max. EPA (sf)	Max. Fixture Weight (lbs)	Max. Fixture Weight (lbs)		
PR4-07-20D2	20 FT	7	3/16"	4"	7.8	165	BOLT4/7	BCK-R4	
PR4-07-25D2	25 FT	7	3/16"	4"	4.1	150			
PR4-07-30D2	30 FT	7	3/16"	4"	1.8	130			
PR4-11-10D2	10 FT	11	1/8"	4"	11.1	585	BOLT4/11		
PR4-11-15D2	15 FT	11	1/8"	4"	6.2	530			
PR4-11-20D2	20 FT	11	1/8"	4"	3.3	430			
PR4-11-25D2	25 FT	11	1/8"	4"	1.1	200			
PR5-07-20D2	20 FT	7	3/16"	5"	13.6	400	BOLT5-8	BCK-R5	
PR5-07-25D2	25 FT	7	3/16"	5"	8.1	330			

TAPERED ROUND

SKU	Height	Gauge	Wall Thickness	Base Shaft Diameter	Top Shaft Diameter	At 90MPH Wind Speed*			Anchor Bolts	Base/Cap Cover
						Max. EPA (sf)	Max. Fixture Weight (lbs)	Max. Fixture Weight (lbs)		
PTR6-11-15D2	15 FT	11	1/8"	6"	4"	13.6	500	BOLT5-8	BCK-RT6/15	
PTR6-07-20D2	20 FT	7	3/16"	6"	3.2"	15.1	690		BCK-RT6/20	
PTR6-11-20D2	20 FT	11	1/8"	6"	3.25"	8.7	500		BCK-RT7	
PTR7-07-25D2	25 FT	7	3/16"	7"	3.5"	13.6	700			
PTR7-11-25D2	25 FT	11	1/8"	7"	3.5"	7.1	500			
PTR8-07-30D2	30 FT	7	3/16"	8"	3.75"	10.1	620			BCK-RT8

*Refer to rablighting.com for additional EPA & weight values at various wind speeds

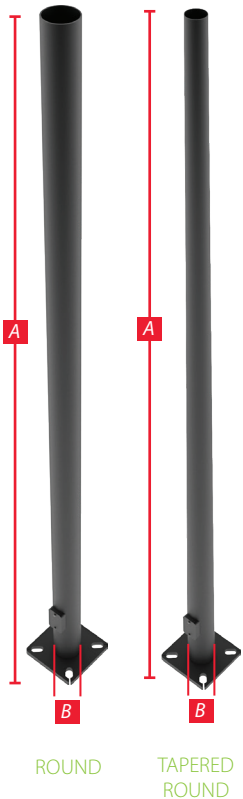

Tenon Top Poles


ROUND

SKU	Height	Gauge	Wall Thickness	Shaft Diameter	At 90MPH Wind Speed*		Anchor Bolts	Base Cover
					Max. EPA (sf)	Max. Fixture Weight (lbs)		
PR4-07-20WT	20 FT	7	3/16"	4"	7.8	165	BOLT4/7	BASE-R4
PR4-07-25WT	25 FT	7	3/16"	4"	4.1	150		
PR4-07-30WT	30 FT	7	3/16"	4"	1.8	130		
PR4-11-10WT	10 FT	11	1/8"	4"	11.1	585	BOLT4/11	
PR4-11-15WT	15 FT	11	1/8"	4"	6.2	530		
PR4-11-20WT	20 FT	11	1/8"	4"	3.3	430		
PR4-11-25WT	25 FT	11	1/8"	4"	1.1	200	BOLT5-8	BASE-R5
PR5-07-20WT	20 FT	7	3/16"	5"	13.6	400		
PR5-07-25WT	25 FT	7	3/16"	5"	8.1	330		

TAPERED ROUND

SKU	Height	Gauge	Wall Thickness	Base Shaft Diameter	Top Shaft Diameter	At 90MPH Wind Speed*		Anchor Bolts	Base Cover
						Max. EPA (sf)	Max. Fixture Weight (lbs)		
PTR6-11-15WT	15 FT	11	1/8"	6"	4"	13.6	500	BOLT5-8	BASE-RT6
PTR6-07-20WT	20 FT	7	3/16"	6"	3.2"	15.1	690		BASE-RT7
PTR6-11-20WT	20 FT	11	1/8"	6"	3.25"	8.7	500		BASE-RT8
PTR7-07-25WT	25 FT	7	3/16"	7"	3.5"	13.6	700		
PTR7-11-25WT	25 FT	11	1/8"	7"	3.5"	7.1	500		
PTR8-07-30WT	30 FT	7	3/16"	8"	3.75"	10.1	620		

*Refer to rablighting.com for additional EPA & weight values at various wind speeds

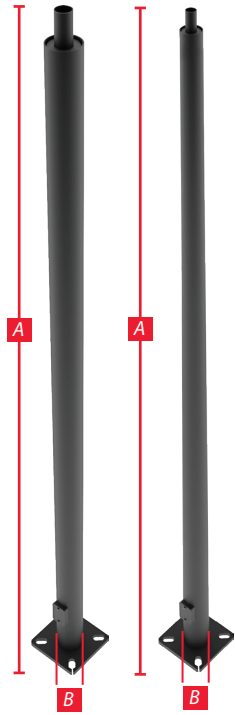

ROUND

TAPERED ROUND