



All the benefits of a panel without all the cost.

Tight budget? No problem. T34 is here to save the day!

T34TM



RAB[®] | Indoor

RABLIGHTING.COM • 888 722-1000

T34™ LED Panel




RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty

- Available in 2 sizes: 2x2 (30W) and 2x4 (40W)
- 0-10V dimmable driver, standard
- IC rated and Chicago Plenum (CCEA) compliant
- Lightcloud-enabled models offered
- 50,000-Hour LED lifespan
- Multiple-unit cartons reduce on-site waste

Tight spaces? No problem.

The T34's low-profile design is IC rated for direct contact with ceiling insulation, and is also Chicago Plenum (CCEA) compliant. Integral earthquake clips secure the panel to T-bars and won't get lost during installation.

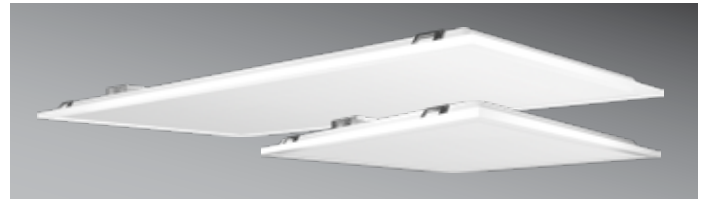

Seeing is believing.

A frosted, polystyrene lens diffuses light, making the T34 ideal for areas that require uniform, glare-free distribution. The standard 0-10V dimmable driver allows for dialed-in control over your light output.



Simple, powerful lighting control.



All models are available with factory-installed Lightcloud® integration, for use with our commercial, wireless lighting control system and service.



Dimensions & weights



2x4 (40W)

Weight: 8.29 lbs.

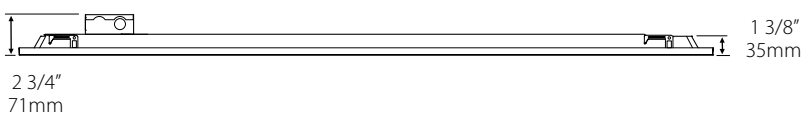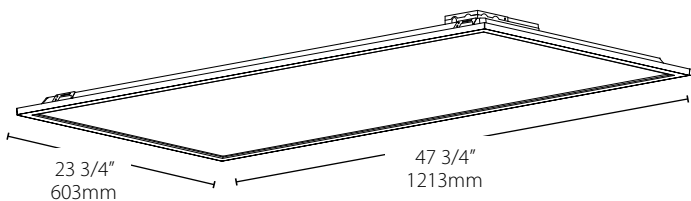

2x2 (30W)

Weight: 4.51 lbs.

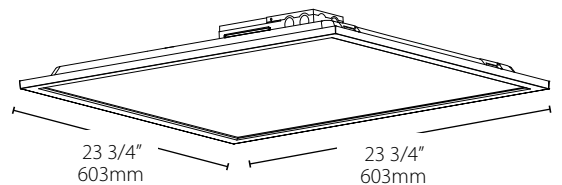

Performance

2x4 (40W)	5000K	4000K
Input Watts	38	40
Lumens	4067	4472
Lumens Per Watt (lm/W)	107	113
Color Accuracy (CRI)	81	80

2x2 (30W)	5000K	4000K
Input Watts	27	28
Lumens	2904	3284
Lumens Per Watt (lm/W)	108	118
Color Accuracy (CRI)	81	80

Performance data is based on test performed at 120V.

Energy savings

73%

Finish

 **White**

Specifications

UL Listing:

Suitable for damp locations

LEDs:

Long-life, surface-mounted, discreet LEDs

Lifespan:

50,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations

Drivers:

Class 2, Constant Current, 50/60Hz, 120-277V, 2kV surge protection

40W: 0.33A@120V, 0.20A@208V, 0.17A@240V, 0.15A@277V

30W: 0.24A@120V, 0.15A@208V, 0.13A@240V, 0.11A@277V

Dimming:

0-10V dimmable driver, standard (down to 10%)

Ambient Temperature:

Suitable for use in -20°C (-4°F) to 40°C (104°F)

Housing:

Plastic frame & galvanized steel back housing

Mounting:

For drop ceilings, standard integral clips secure the fixture to t-bars and prevent t-system separation. Compatible with RMKPANEL for other recessed applications and SMK PANEL for surface applications.

Lens:

Frosted Polystyrene

Green Technology:

Mercury and UV free. RoHS-compliant components.

Ordering Information

*Must order in case quantity increments. See product spec sheet for exact increments.

Product	Size	Wattage	Color Temp	Voltage	Lighting Controls
T34	2x4 2ft x 4ft 2x2 2ft x 2ft	40 40W (2x4) 30 30W (2x2)	Blank 5000K N 4000K	/D10 120-277Vac	Blank No options /LC Lightcloud

For the latest product literature,
download the rabdrive app

Get the app



Follow us



RAB[®]

Learn more:

rablighting.com • lightcloud.com

RAB is continually improving our products. Specifications may change without notice.
The designs of RAB fixtures are protected under U.S. and international intellectual property laws.