

# A-line, Static CCT



A19 40/60W

A19 75W

A19 100W

PROJECT:

DATE:

TYPE:

PREPARED BY:



\*90 CRI models only

\*90 CRI models only

Plastic 40W-100W LED A19, 120V,  
80CRI & 90CRI, 15,000 hrs



## KEY FEATURES

- Energy-efficient replacement for incandescent and halogen lamps
- Durable plastic construction reduces risk of breakage
- Enclosed fixture rated
- Frosted lens delivers smooth, diffuse light
- Longer lifespan compared to legacy equivalents minimizes replacement and maintenance costs

## PERFORMANCE

Catalog Number	Product Type	Wattage Equivalency	Input Wattage	Lumens	Efficacy	Dim Type	Input Voltage	Beam Angle	Color Temp	CRI	L70 Lifespan	Title 20
A19-6-E26-827-ND	A-Line, 80 CRI Non-Dimmable	40W Incandescent	5.5W	450 lm	82 lm/W	No	120V	160°	2700K	80 CRI	15,000 hrs	NO
A19-6-E26-830-ND									3000K			
A19-6-E26-840-ND									2700K			
A19-9-E26-827-ND		60W Incandescent	9W	800 lm	89 lm/W	No	120V	160°	3000K			
A19-9-E26-830-ND									4000K			
A19-9-E26-840-ND									5000K			
A19-9-E26-850-ND									3000K			
A19-12-E26-827-ND		75W Incandescent	11W	1,100lm	100 lm/W	No	120V	160°	2700K			
A19-12-E26-830-ND									3000K			
A19-12-E26-840-ND									4000K			
A19-12-E26-850-ND									5000K			
A19-15-E26-827-ND		100W Incandescent	15W	1,600lm	107 lm/W	No	120V	160°	2700K			
A19-15-E26-830-ND									3000K			
A19-15-E26-840-ND									4000K			
A19-15-E26-850-ND									5000K			

# A-line, Static CCT



## PERFORMANCE (cont'd)

Catalog Number	Shape	Wattage Equivalency	Input Wattage	Lumens	Efficacy	Dim Type	Input Voltage	Beam Angle	Color Temp	CRI	L70 Lifespan	Title 20
A19-10-E26-827-DIM	A-line, 80CRI Dimmable	60W Incandescent	9W	800 lm	89 lm/W	TRIAC/ELV	120V	160°	2700K	80 CRI	15,000 hrs	NO
A19-10-E26-830-DIM									3000K			
A19-10-E26-840-DIM									4000K			
A19-10-E26-850-DIM									5000K			
A19-13-E26-827-DIM		2700K										
A19-13-E26-830-DIM		3000K										
A19-13-E26-840-DIM		4000K										
A19-13-E26-850-DIM		5000K										
A19-15-E26-827-DIM		100W Incandescent	15W	1600 lm	107 lm/W			220°	2700K			
A19-15-E26-830-DIM									3000K			
A19-15-E26-840-DIM									4000K			
A19-15-E26-850-DIM									5000K			
A19-6-E26-927-DIM	A-line, 90CRI Dimmable Title 20 Compliant	40W Incandescent	5.5W	450 lm	85 lm/W	TRIAC/ELV	120V		2700K	90 CRI	15,000 hrs	Yes
A19-6-E26-930-DIM									3000K			
A19-6-E26-950-DIM								5000K				
A19-9-E26-927-DIM		60W Incandescent	9W	800 lm	89 lm/W			2700K				
A19-9-E26-930-DIM								3000K				
A19-9-E26-940-DIM								4000K				
A19-9-E26-950-DIM		5000K										
A19-12-E26-930-DIM		75W Incandescent	11W	1100W	100 lm/W			3000K				
A19-12-E26-950-DIM								5000K				
A19-15-E26-927-DIM								2700K				
A19-15-E26-930-DIM		100W Incandescent	15W	1600 lm	107 lm/W			3000K				
A19-15-E26-940-DIM								4000K				
A19-15-E26-950-DIM								5000K				

## TECHNICAL SPECIFICATIONS

### CONSTRUCTION

**Product Type**

A-line, Static CCT

**Shape**

A19

**Enclosure Material**

Constructed from frosted, shatter-resistant polycarbonate

**Finish**

White

**Lens Finish**

Frosted

### COMPLIANCE

**ETL Listed**

This product has been tested by Intertek and found in compliance with accepted national standards.

**Environment**

Suitable for use indoors and outdoors in dry, damp, or wet environments.

**Fixture Rating**

Suitable for use in enclosed fixtures

**California Title 20 Compliant**

Can be used to conform with the requirements of California Title 20

*\*Select models*

**California Title 24 JA8 Compliant**

Can be used to conform with the requirements of California Title 24 Part 6

*\*Select models*

**California Energy Commission (CEC)**

Lawful for Sales in California

**RoHS**

Mercury and UV free. RoHS-compliant components.

**FCC**

Complies with Part 15 of the FCC Rules

### PERFORMANCE

**Color Temperature**

2700K, 3000K, 4000K, 5000K

*\*Some models may not be available in all color temperatures*

**Color Accuracy (CRI)**

>80, >90

**Efficacy**

up to 107lm/w

### ELECTRICAL

**Dimmable**

Yes, dimmable down to 10% on compatible TRIAC/ELV dimming systems. See Dimmer Compatibility List.

**Input Voltage**

120V

**Operating Frequency**

50/60 Hz

**Operating Temperature**

-4°F to 104°F (-20°C to 40°C)

### INSTALLATION

**Base Type**

E26 Edison

### OTHER


**Warranty**

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

## DIMENSIONS


#### A19 40W & 60W Equivalent

Weight: 0.05 lbs.

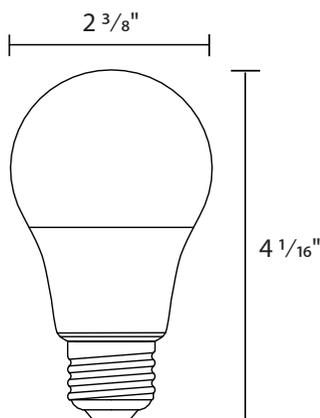

#### A19 75W Equivalent

Weight: 0.08 lbs.

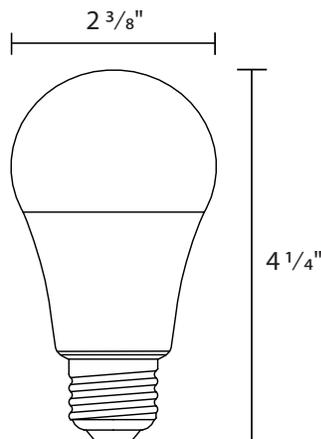


#### A19 75W Equivalent

Weight: 0.08 lbs.

#### A19 100W Equivalent

Weight: 0.12 lbs.

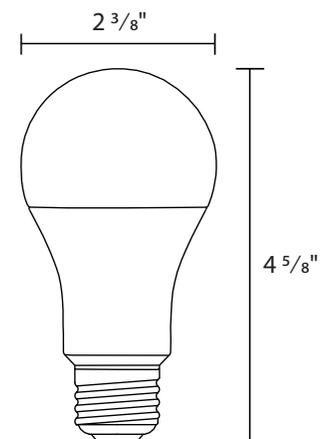

## ORDERING INFO

Catalog Number	UPC	Case Pack
A19-10-E26-827-DIM	19813748207	48
A19-10-E26-830-DIM	19813748214	48
A19-10-E26-840-DIM	19813748221	48
A19-10-E26-850-DIM	19813834023	48
A19-13-E26-827-DIM	19813748313	48
A19-13-E26-830-DIM	19813834030	48
A19-13-E26-840-DIM	19813748320	48
A19-13-E26-850-DIM	19813748337	48
A19-15-E26-827-DIM	19813748344	48
A19-15-E26-830-DIM	19813748351	48
A19-15-E26-840-DIM	19813748368	48
A19-15-E26-850-DIM	192552006071	48
A19-5-E26-827-DIM	19813748160	48
A19-5-E26-830-DIM	19813748177	48
A19-5-E26-840-DIM	19813748184	48
A19-5-E26-850-DIM	19813748191	48
A19-12-E26-827-ND	19813834276	12
A19-12-E26-830-ND	19813834283	12
A19-12-E26-840-ND	19813834290	12
A19-12-E26-850-ND	192552052627	12
A19-15-E26-827-ND	192552052634	48
A19-15-E26-830-ND	192552052641	48
A19-15-E26-840-ND	192552052658	48
A19-15-E26-850-ND	19813748412	48
A19-6-E26-827-ND	19813748436	12
A19-6-E26-830-ND	19813834245	12
A19-6-E26-840-ND	#N/A	12
A19-9-E26-827-ND	19813748450	12
A19-9-E26-830-ND	19813834252	12
A19-9-E26-840-ND	19813748467	12

## ORDERING INFO *(cont'd)*

Catalog Number	UPC	Case Pack
A19-9-E26-850-ND	19813834269	12
A19-12-E26-930-DIM	#N/A	12
A19-12-E26-950-DIM	192552024303	12
A19-15-E26-927-DIM	192552024310	12
A19-15-E26-930-DIM	192552024327	12
A19-15-E26-940-DIM	192552024334	12
A19-15-E26-950-DIM	19813750064	12
A19-6-E26-927-DIM	19813748030	12
A19-6-E26-930-DIM	#N/A	12
A19-6-E26-950-DIM	19813748054	12
A19-9-E26-927-DIM	19813748061	12
A19-9-E26-930-DIM	19813748078	12
A19-9-E26-940-DIM	19813748085	12
A19-9-E26-950-DIM	#N/A	12

## ORDERING MATRIX

Family	Wattage	Base Type	CRI/Color Temp	Voltage/Dimming
--------	---------	-----------	----------------	-----------------

### A19 80 CRI Non-Dimmable

A19		E26		
6	6W*	E26	Edison	827 80 CRI, 2700K
9	9W			830 80 CRI, 3000K
12	12W			840 80 CRI, 4000K
15	15W			850 80 CRI, 5000K

ND 120V; Non-Dimmable  
DIM 120V; TRIAC/ELV

\*6W not available in 5000K

### A19 80 CRI Dimmable

A19		E26		DIM
5	5W	E26	Edison	827 80 CRI, 2700K
10	10W			830 80 CRI, 3000K
13	13W			840 80 CRI, 4000K
15	15W			850 80 CRI, 5000K

DIM 120V; TRIAC/ELV

### A19 90 CRI Dimmable

A19		E26		DIM
6	6W	E26	Edison	927 90 CRI, 2700K
9	9W			930 90 CRI, 3000K
12	12W			940 90 CRI, 4000K
15	15W			950 90 CRI, 5000K

DIM 120V; TRIAC/ELV

\*6W not available in 4000K

\*\*12W not available in 4000K

## Dimmer Compatibility List

A19 Bulb		Dimmer compatibility						
Brand	Dimmer Cat NR	1 Lamp	2 Lamp	3 Lamp	4 Lamp	5 Lamp	6 Lamp	Dimming Level <10%
LUTRON	MAELV-600	✓	✓	✓	✓	✓	N/A	✓
LUTRON	CTCL-153P	✓	✓	✓	✓	✓	N/A	✓
LUTRON	DVCL-153P	✓	✓	✓	✓	✓	N/A	✓
LUTRON	TGCL-153P	✓	✓	✓	✓	✓	N/A	✓
LEVITON	6672	✓	✓	✓	✓	✓	N/A	✓
LEGRAND	IPL06	✓	✓	✓	✓	✓	N/A	✓
RAB	XDIM	✓	✓	✓	✓	✓	N/A	✓