

ARC Track Light



ARC



ARCSM



ARCRM



ARCPM



ARCTPM



PROJECT: _____

DATE: _____

TYPE: _____


PREPARED BY: _____



KEY FEATURES

- ARC Track light with Static 10W and 3000K CCT
- 120V, TRIAC dimming
- Fits standard single circuit H-track. Surface, pendant, track pendant, & recessed mount options available.
- White or black finish with standard gold reflector
- 90CRI
- Beam angle 36°
- UL rated for dry locations. Recessed mount models are rated for damp location.
- 5-year, limited warranty

Decorative track light with gold reflector

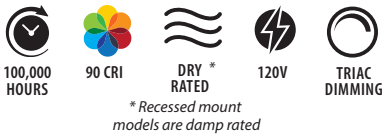

PERFORMANCE

ARC & ARCTP	3000K
Watts	10W
Input Watt	10.2W
Lumens	837
Efficacy	82.1
CRI	93
Voltage Rating	120V

ARCSM & ARCPM	3000K
Watts	10W
Input Watt	9.3W
Lumens	776
Efficacy	83.4
CRI	93
Voltage Rating	120V

ARCRM	3000K
Watts	10W
Input Watt	9.1W
Lumens	785
Efficacy	86.3
CRI	93
Voltage Rating	120V

TECHNICAL SPECIFICATIONS

COMPLIANCE

UL Listed
Suitable for dry locations. The recessed mount models are damp rated.

LED CHARACTERISTICS

LEDS
Long-life, high-efficacy, COB (Chip on Board) LEDs

Color Uniformity

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standards for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

ARC Track Light



TECHNICAL SPECIFICATIONS

CONSTRUCTION

Cold Weather Starting

Minimum starting temperature is -4°F (-20°C)

Maximum Ambient Temperature

Suitable for use in up to 104°F (40°C)

Housing

Aluminum

Mounting

Standard track mount. Surface, pendant, track pendant, & recessed mount options available.

Beam Angle:

36°

Reflector

Polycarbonate

IP Ratings

Ingress protection rating of IP20 for dust and water

Green Technology

Mercury and UV free. RoHs-compliant components.

Finish

Formulated for high durability and long lasting color. Available in bronze, white or black finish.

ELECTRICAL

Drivers

120V, class 1 driver (Recessed mount models only), all other models are with class 2 driver, 60 Hz, TRIAC dimming

All ARC Models: 120V: 0.01A

THD:

ARC & ARCTP: 6.3% at 120V

ARCRM: 13.4% at 120V

ARCSM & ARCPM: 13.8% at 120V

Power Factor

ARC & ARCTP: 98.5% at 120V

ARCRM: 96.3% at 120V

ARCSM & ARCPM: 96.2% at 120V

Surge Protection

Ring Wave L-N:2.5KV, LN-PE 2.5KV

Dimming Driver

Yes, dimmable down to 10% on compatible TRIAC dimming systems.

OTHER

Warranty

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.


Lifespan

100,000-hour LED lifespan based on IES LM-80 results and -21 calculations

DIMENSIONS


ARC

Weight: 0.68 lbs

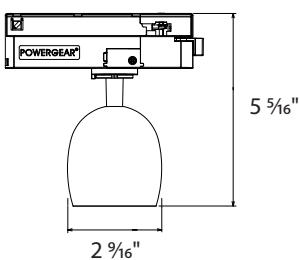


ARCSM

Weight: 0.68 lbs

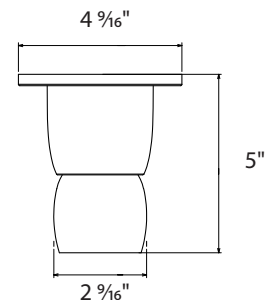

ARCRM

Weight: 0.86 lbs

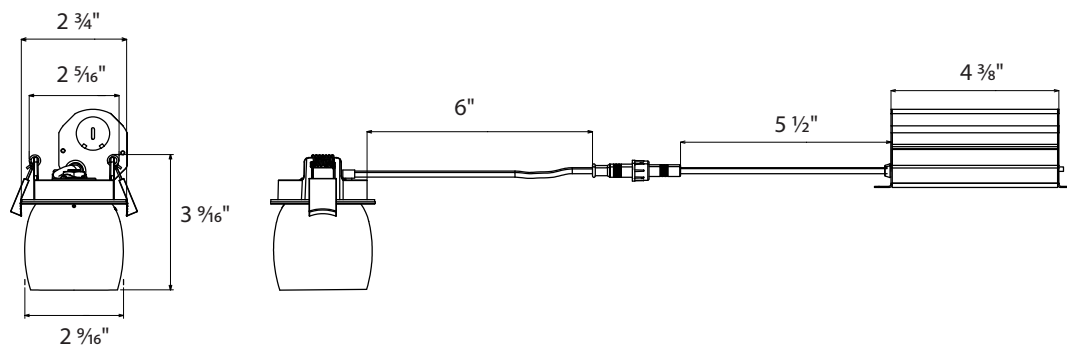


ARC Track Light



DIMENSIONS


ARCTP

Weight: 0.68 lbs

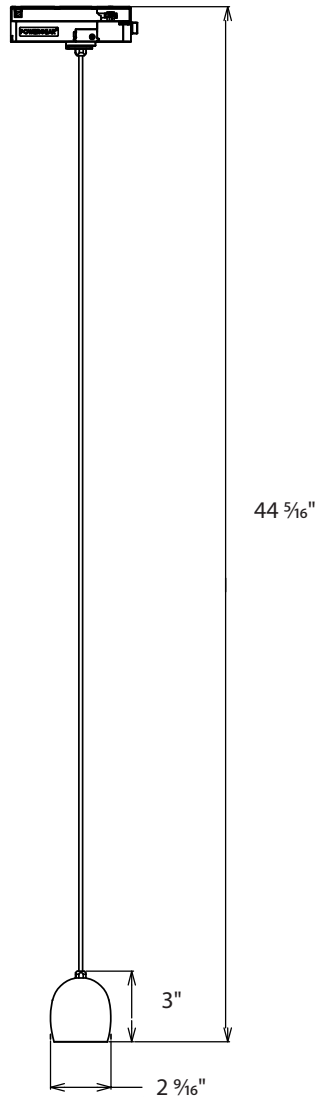

ARCPM

Weight: 0.68 lbs

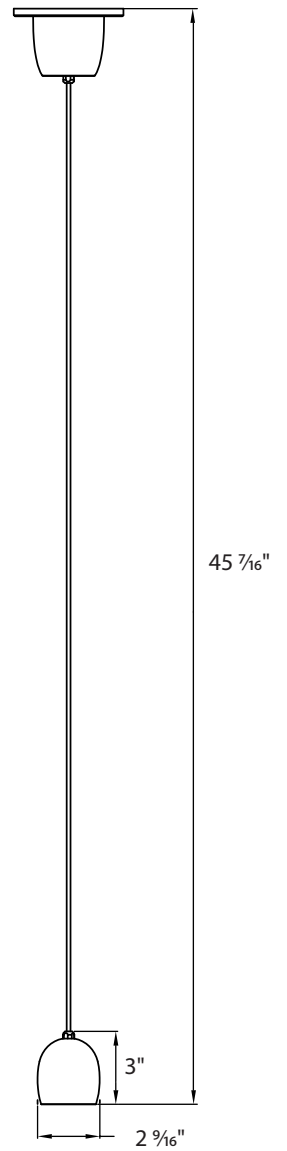

ARC Track Light

Family	Wattage	Mount	Color Temperature	Optics	Finish	Driver
ARC	BLANK 10W	BLANK SM TP PM RM	BLANK 3000K	BLANK 36°	BLANK B White Housing / Gold Reflector Black Housing / Gold Reflector	BLANK 120V, TRIAC Dimming