

3-Way, Field-Adjustable A Bulbs



A21-17.5-E26-6CCT-3W A19-13.5-E26-6CCT-3W

40/60/100W Incandescent Equivalent



PROJECT:

DATE:

TYPE:

PREPARED BY:



KEY FEATURES

- Energy-efficient replacement for incandescent and halogen 3-way lamps
- Durable plastic reduces risk of breakage
- Selectable color temp 2700/3000/3500/4000/5000/6500K
- Rated for enclosed fixture
- Longer LED lifespan minimizes replacement and maintenance costs

PERFORMANCE

Catalog Number	Wattage Equivalency	Input Wattage	Lumens	Efficacy	Beam Angle	Color Temp
A19-13.5-E26-6CCT-3W	100/60/40W Incandescent	13.5/7.5/4.5W	1,600/800/450 lm	118 lm/W	230°	Default: 3000K Field adjustable via dip switch 2700/3000/3500/4000/5000/6500K
A21-17.5-E26-6CCT-3W	150/100/50W Incandescent	17.5/13/6.5W	2,500/1600/650 lm	142 lm/W	230	

TECHNICAL SPECIFICATIONS

CONSTRUCTION

Product Type

A-Line 3-Way, Field-Adjustable

Shape

A19, A21

End-cap Material

Corrosion-resistant aluminum endcaps with E26d double-contact Edison base

Enclosure Material

Shatter-resistant polycarbonate housing

Finish

White

Base Type

E26 Edison

LED CHARACTERISTICS

Lifespan

25,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations

Beam Angle

230°

Color Temperature

Field adjustable via dip switch 2700/3000/3500/4000/5000/6500K
Default: 3000K

Color Accuracy (CRI)

CRI 90

R9 Value

High-color performance with R9 no greater than 0

Color Consistency

<4-step (2700K & 5000K) MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

3-Way, Field-Adjustable A Bulbs



TECHNICAL SPECIFICATIONS *(cont'd)*

COMPLIANCE

Listings

UL1993

Environment

Suitable for use indoors in dry and damp environments. Except PAR16, it is wet rated for indoor and outdoor environments.

Fixture Rating

Suitable for use in enclosed fixtures

California Title 20 Compliant

Can be used to conform with the requirements of California Title 20.

California Energy Commission (CEC) Status

Lawful for Sales in California

RoHS

Mercury and UV free. RoHS-compliant components.

FCC

Complies with Part 15 of the FCC Rules

ELECTRICAL

Dimmable

No

Driver

Catalog Number	Input Current @ 120V (mA)
A19-13.5-E26-6CCT-3W	183mA
A21-17.5-E26-6CCT-3W	235mA

Input Voltage

120V

Operating Frequency

60Hz

Operating Temperature

-4°F to 104°F (-20° to 40°C)

Power Factor

0.7

OTHER


Warranty

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

DIMENSIONS


A19-13.5-E26-6CCT-3W

Weight: 0.19 lbs

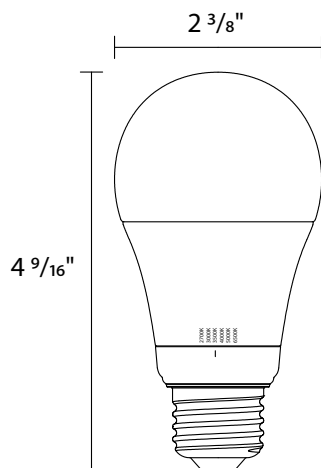

A21-17.5-E26-6CCT-3W

Weight: 0.28 lbs

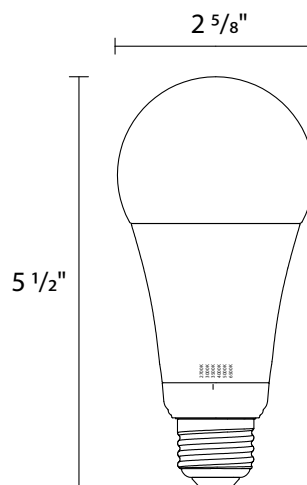

3-Way, Field-Adjustable A Bulbs



ORDERING INFO

Catalog Number	Model Number	UPC	Case Pack
A19-13.5-E26-6CCT-3W	A19-13.5-E26-6CCT-3W	192552063463	48
A21-17.5-E26-6CCT-3W	A21-17.5-E26-6CCT-3W	192552063470	48

ORDERING MATRIX

Family	Wattage		Base		CRI/Color Temp		Driver	Controls	
A19	13.5	13.5W	E26	Edison	6 CCT	90 CRI, CCT Adjustable	Blank	120V; TRIAC/ELV	3W 3-Way
A21	17.5	17.5W							