

CLED™ INSTALLATION INSTRUCTIONS



Thank you for buying RAB lighting fixtures. Our goal is to design the best quality products to get the job done right. We'd like to hear your comments. Call the Marketing Department at 888-RAB-1000 or email: marketing@rabweb.com



IMPORTANT

READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

Fixtures must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

WARNING: Make certain power is OFF before installing or maintaining fixture. No user serviceable parts inside.

CAUTION: Use weatherproof silicone sealant between the ceiling plate and mounting surface.

CEILING MOUNTING


Mount the fixture to a Junction Box as follows:

1. Mount the **Round Ceiling Plate** to a 4" round junction box or octagonal junction box. Mount the **Square Ceiling Plate (available upon request)** to a square junction box. Use weatherproof silicone sealant between the **Round/Square Ceiling Plate** and mounting surface.
2. Attach **Tether Cable** to the **Housing** with **Screw** provided in the location shown.
3. Hang **Housing** on **Ceiling Plate Hooks** and make the wiring connections with UL approved connectors.
4. Swing **Housing** closed and slide as indicated by **Directional Arrows** in figure to lock the **Housing** onto the **Ceiling Plate**.
5. To unlock the fixture, slide the fixture in direction opposite to Company Logo and unhook it from **Round/Square Ceiling Plate**.

WIRING

Universal voltage driver permits operation at 120 to 277VAC, 50 or 60Hz.

1. Connect the black fixture lead to the (+) LINE supply lead.
2. Connect the white fixture lead to the (-) COMMON supply lead.
3. Connect the bare copper Ground wire from fixture to supply ground.

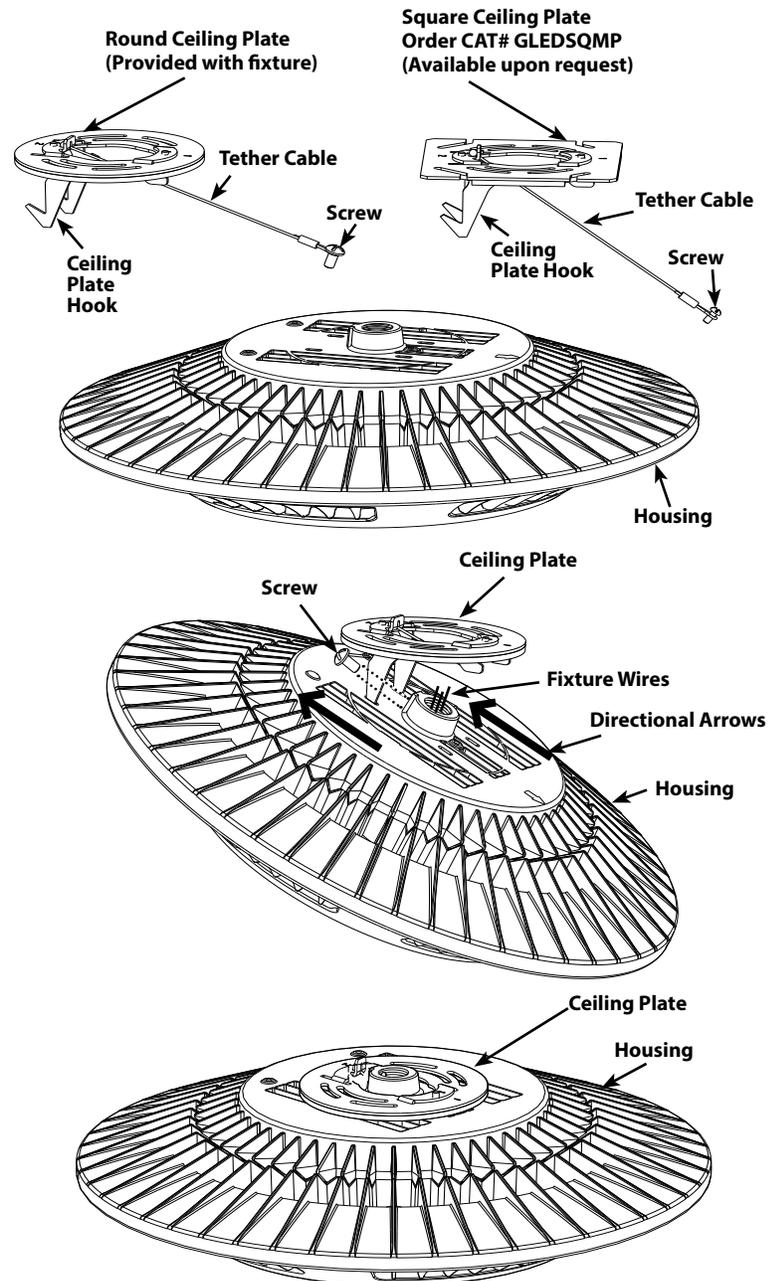

CLED™ INSTALLATION INSTRUCTIONS

Thank you for buying RAB lighting fixtures. Our goal is to design the best quality products to get the job done right. We'd like to hear your comments. Call the Marketing Department at 888-RAB-1000 or email: marketing@rabweb.com

0-10V DIMMABLE WIRING

Universal voltage driver permits operation at 120V thru 277V, 50 or 60 Hz. 0-10V control wires must be rated for 300V minimum. For 0-10V Dimming, follow the wiring directions as in fig. 2.

1. Connect the black fixture lead to the (+) LINE supply lead.
2. Connect the white fixture lead to the (-) COMMON supply lead.
3. Connect the GROUND wire from fixture to supply ground. Do NOT connect the GROUND of the dimming fixture to the output.
4. Connect the purple fixture lead to the (V+) DIM lead.
5. Connect the gray fixture lead to the (V-) DIM lead.
6. Cap the yellow fixture lead. Do NOT connect.

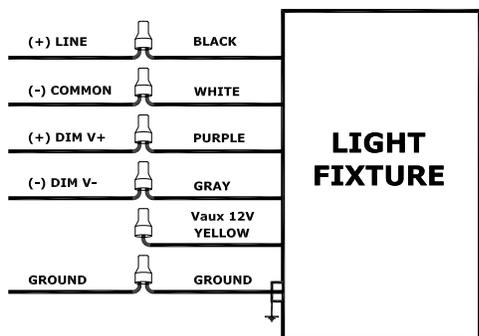


Fig. 2

CLEANING & MAINTENANCE

CAUTION: Be sure fixture temperature is cool enough to touch. Do not clean or maintain while fixture is energized.

1. Clean lens with non-abrasive glass cleaning solution.
2. Do not open fixture to clean the LED. Do not touch the LED.


TROUBLESHOOTING

1. Check that the line voltage at fixture is correct. Refer to wiring directions.
2. Is the fixture grounded properly?

OPTIONS

- Suffix "Y" = Warm 3000K LED
 Suffix "N" = Neutral 4000K LED

CLED52

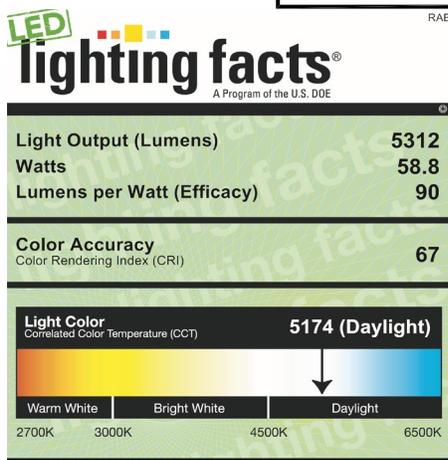


All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: WVMA-YZQ8BH (1/3/2014)
 Model Number: CLED52 [UPGRADE: 12/31/2013]
 Type: Luminaire - Other

CLED78

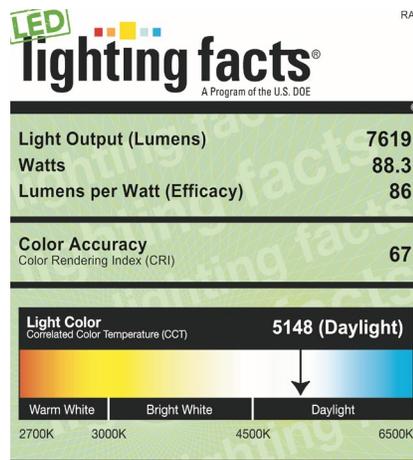

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: WVMA-ZOUYKV (1/6/2014)
 Model Number: CLED78 (Upgrade 12/31/13)
 Type: Luminaire - Other

Note: These instructions do not cover all details or variations in equipment nor do they provide for every possible situation during installation operation or maintenance.

Easy Installation & Product Help

Tech Help Line
 Call our experts 888 RAB-1000

rabweb.com
 Visit our website for product info

email
 Answered promptly sales@rabweb.com