


SKEET™ INSTALLATION INSTRUCTIONS



Thank you for buying RAB lighting fixtures. Our goal is to design the best quality products to get the job done right. We'd like to hear your comments. Call the Marketing Department at 888-RAB-1000 or email: marketing@rabweb.com



SKEET - Round

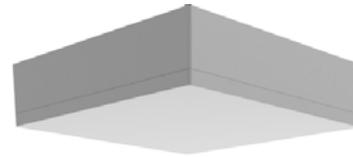

SKEET - Square

IMPORTANT

READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

Fixtures must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

WARNING: Make certain power is OFF before installing or maintaining fixture. No user serviceable parts inside.

SAFETY INSTRUCTIONS

WARNING: Suitable for damp locations.

WARNING: Minimum 90°C supply conductors.


WARNING: Do not handle energized fixture when hands are wet, when standing on wet or damp surfaces, or in water.

CEILING/WALL MOUNTING - ROUND

The fixture is suitable only for INDOOR application with recessed junction box in ceiling/ wall.

Mount to a recessed octagonal junction box as follows:

1. Mount **Bracket** with side marked 'THIS SIDE OF BRACKET TOWARDS CEILING/WALL' oriented towards **Junction Box** (not supplied) with (2) 8-32 x 1/2" **Screws** provided.
2. Pull supply wires from **Junction Box** (not supplied) through center access hole of **Bracket** as shown in figure. Use appropriate wire connectors as required by code to make electrical splices to fixture leads.
3. Once connections are made push all wires back through access hole into **Junction Box** (not supplied). Be careful not to pinch wires.
WARNING: To prevent wiring damage or abrasion, do not expose wiring to edges of sharp objects.
4. Rotate **Housing** clockwise on **Bracket** for round housing. Follow directional arrows in figure to lock **Bracket Spring** underneath **Housing Tab**.
5. Secure **Housing** to **Bracket** with **White Screw** provided.

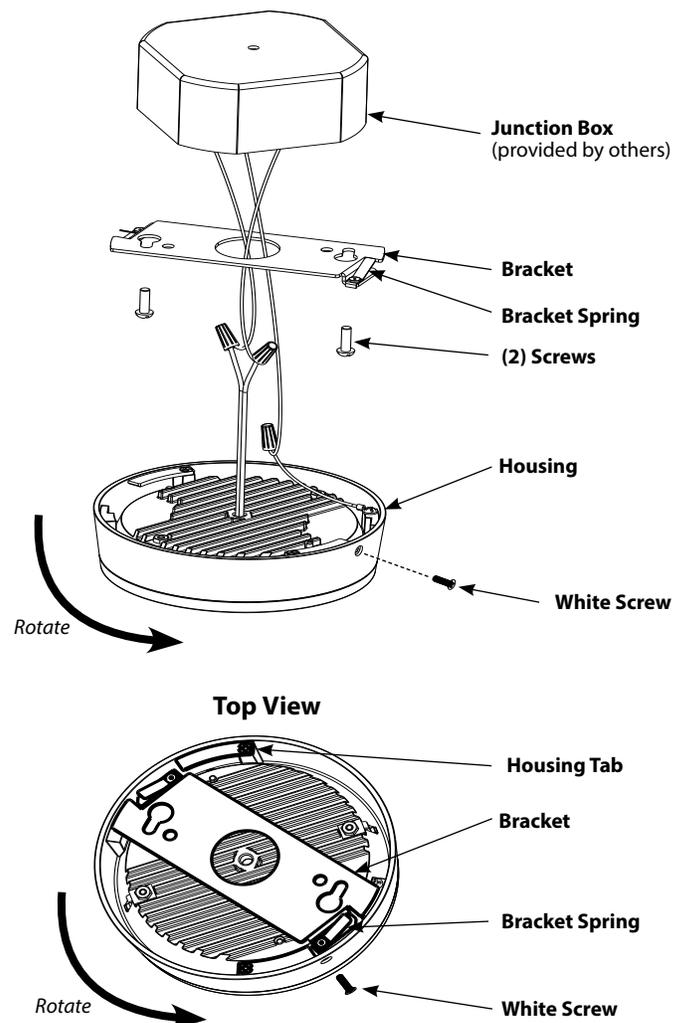

SKEET™ INSTALLATION INSTRUCTIONS





Thank you for buying RAB lighting fixtures. Our goal is to design the best quality products to get the job done right. We'd like to hear your comments. Call the Marketing Department at 888-RAB-1000 or email: marketing@rabweb.com

CEILING/WALL MOUNTING - SQUARE

The fixture is suitable only for INDOOR application with recessed junction box in ceiling/ wall.

Mount to a recessed octagonal junction box as follows:


1. Mount **Bracket** with side marked 'THIS SIDE OF BRACKET TOWARDS CEILING/WALL' oriented towards **Junction Box** (not supplied) with (2) 8-32 x 1/2" **Screws** provided.
2. Pull supply wires from **Junction Box** (not supplied) through center access hole of **Bracket** as shown in figure. Use appropriate wire connectors as required by code to make electrical splices to fixture leads.
3. Once connections are made push all wires back through access hole into **Junction Box** (not supplied). Be careful not to pinch wires.
WARNING: To prevent wiring damage or abrasion, do not expose wiring to edges of sharp objects.
4. Slide **Housing** on **Bracket** for square housing. Follow directional arrows in figure to lock **Bracket Spring** underneath **Housing Tab**.
5. Secure **Housing** to **Bracket** with **White Screw** provided.

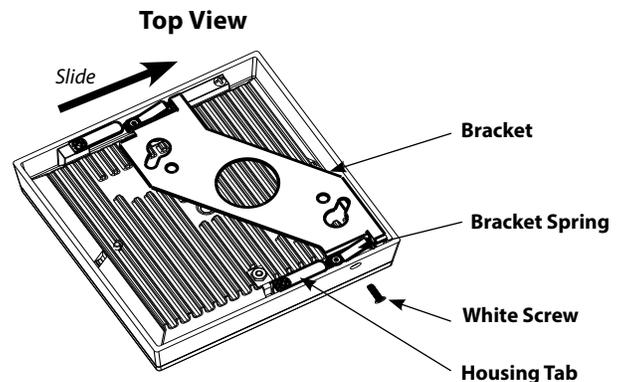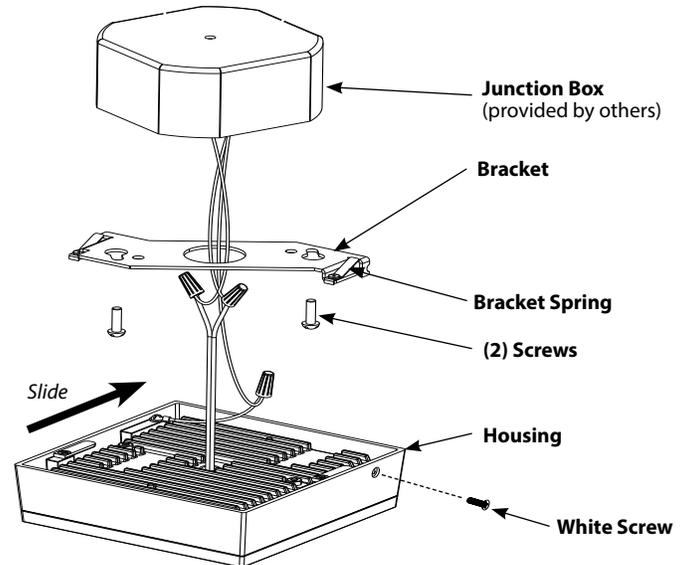

WIRING

Fixture operates at 120V AC, 50 or 60 Hz

1. Connect the black fixture lead to the (+) LINE supply lead.
2. Connect the white fixture lead to the (-) COMMON supply lead.
3. Connect the bare copper Ground wire from fixture to supply ground.

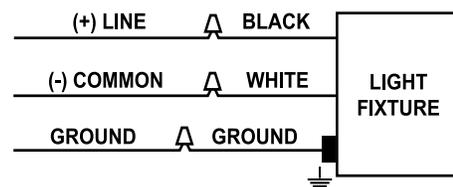

SKEET™ INSTALLATION INSTRUCTIONS



Thank you for buying RAB lighting fixtures. Our goal is to design the best quality products to get the job done right. We'd like to hear your comments. Call the Marketing Department at 888-RAB-1000 or email: marketing@rabweb.com

CLEANING & MAINTENANCE

CAUTION: Be sure fixture temperature is cool enough to touch. Do not clean or maintain while fixture is energized.

1. Clean lens & fixture with non-abrasive cleaning solution.
2. Do not open fixture to clean the LED. Do not touch the LED.

TROUBLESHOOTING

1. Check that the line voltage at fixture is correct. Refer to wiring directions.
2. Is the fixture grounded properly?

SK9RYY
2700K




All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: WVMA-AWRYFK (10/29/2014)
Model Number: SK9RYY
Type: Luminaire - Decorative

SK9RY
3000K

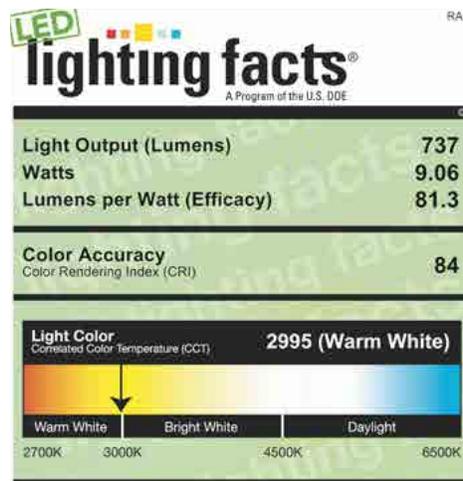


All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: WVMA-4UPC6G (11/14/2014)
Model Number: SK9RY
Type: Luminaire - Decorative

SK9RYN
3500K

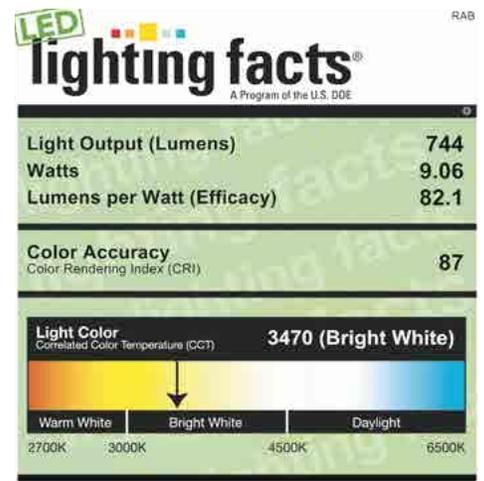

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: WVMA-885QK3 (10/29/2014)
Model Number: SK9RYN
Type: Luminaire - Decorative

PATENT - Pending: Pat. pending

Note: These instructions do not cover all details or variations in equipment nor do they provide for every possible situation during installation operation or maintenance.



Easy Installation & Product Help

Tech Help Line
Call our experts 888 RAB-1000

rabweb.com
Visit our website for product info

email
Answered promptly sales@rabweb.com