


CCT-Adjustable DISK34 Surface Mount

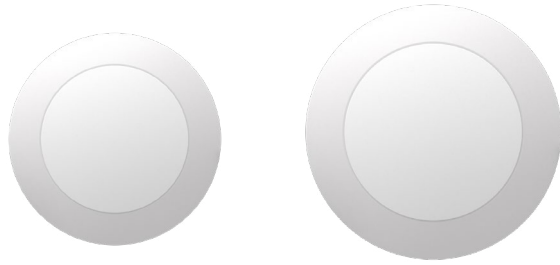

4"

6"

PROJECT: _____

DATE: _____

TYPE: _____

PREPARED BY: _____



CCT-Adjustable DISK34



KEY FEATURES

- Ultra low-profile, back-lit design made of durable thermoplastic with frosted lens
- 5 selectable CCTs: 2700K, 3000K, 3500K, 4000K, 5000K
- New construction or retrofit applications
- Installs on standard junction boxes
- Suitable for indoor/outdoor use in dry, damp, and wet locations
- 50,000-hour lifespan

PERFORMANCE

Catalog Number	Size	Equivalency	Input Wattage	Lumens	Efficacy	Color Temperature	CRI	L70 Lifespan
DISK34-4	4"	60W Incandescent	10W	700 lm	70 lm/W	Field-adjustable dip switch 2700K/3000K/3500K/4000K/5000K	90+	50,000-hr
DISK34-6	6"	75W Incandescent	15W	1000 lm	67 lm/W			

Catalog Number	Wattage	CCT	Efficacy	Lumens	Equivalency Wattage
DISK34-4	10W	2700K	71 lm/W	712 lm	60W Incandescent
		3000K	75 lm/W	746 lm	
		3500K	77 lm/W	762 lm	
		4000K	76 lm/W	763 lm	
		5000K	74 lm/W	738 lm	

Catalog Number	Wattage	CCT	Efficacy	Lumens	Equivalency Wattage
DISK34-6	15W	2700K	68 lm/W	1,017 lm	75W Incandescent
		3000K	72 lm/W	1,077 lm	
		3500K	77 lm/W	1,128 lm	
		4000K	76 lm/W	1,132 lm	
		5000K	73 lm/W	1,088 lm	

TECHNICAL SPECIFICATIONS

CONSTRUCTION

Product Type

Disk Surface Mount

Size

4", 6"

Shape

Round

Enclosure Material

Metal

Finish

White

Trim Style

Smooth

Lens

Polycarbonate

INSTALLATION

Mounting

Surface Mount + Recessed

ELECTRICAL

Dimmable

Yes, dimmable down to 10% on compatible TRIAC/ELV dimming systems.

(See Dimmer Compatibility List)

THD

≤20%

Power Factor

≥0.9

Flicker

≤30%

Input Voltage

120V

Operating Frequency

60Hz

Operating Temperature

-4°F to 104°F (-20°C to 40°C)

Beam Angle

110°±10°

LED CHARACTERISTICS

Color Temperature

Field-adjustable dip switch 2700K/3000K/3500K/4000K/5000K

Color Accuracy (CRI)

>90

R9 Value

High color performance with R9 greater than or equal to 50

Color Consistency

4-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

COMPLIANCE

UL Listed

Suitable for wet locations

Environment

Suitable for indoor and outdoor applications in dry, damp, and wet environments.

IC Rated

No

Air Tight

No

ENERGY STAR® Approved

This product is ENERGY STAR® Version 2.2 Certified.

DLC Listed

No. There is no product category on the Design Lights Consortium (DLC) Qualified Products List for this product to qualify under.

T20 Compliant

Not applicable

California Title 24 JA8 Compliant

Can be used to conform with the requirements of California Title 24 Part 6.

California Energy Commission (CEC) Status

Lawful for Sales in California

NEC Compliant

Suitable for use in closets. Compliant with NEC Sec. 410.16 (A)(1) and 410.16 (C1).

IESNA LM-79 & LM80 Testing

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

FCC

Complies with Part 15 of the FCC Rules.

RoHS

Mercury and UV free. RoHS-compliant components.

OTHER

Warranty

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish.

RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Note


All values are typical (tolerance +/- 10%)

CCT-Adjustable DISK34 Surface Mount



DIMENSIONS

DISK34

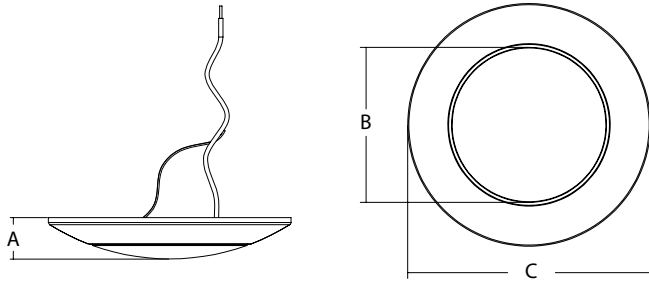

ACCESSORIES



Size	Weight	A	B	C
4"	0.41 lb	1 1/16"	3 15/16"	6 1/8"
6"	0.53 lb	1 1/16"	5 1/8"	7 3/8"

Catalog Number	UPC	Description
DSKFA4/PIR/ACC	192552018975	Mounting hardware
DSKFA6/PIR/ACC	192552018982	Mounting hardware

ORDERING INFO

Catalog Number	Model Number (Energy Star)	UPC	Case Pack
DISK34-4	DLS0170(DISK34-4)	192552028615	12
DISK34-6	DLS0171(DISK34-6)	192552028622	12

ORDERING MATRIX

Family	Size/Wattage	Shape	CRI/Color Temp	Voltage/Dimming	Finish	Trim						
DISK34	-											
	4 6	4", 10W 6", 15W	Blank	Round	Blank	90 CRI, Field-adjustable CCT 2700K/3000K/3500K/4000K/5000K	Blank	120V, TRIAC/ELV	Blank	White	Blank	Smooth