



EXITOUT



EXITOUT-G

PROJECT: \_\_\_\_\_

DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_

PREPARED BY: \_\_\_\_\_



## KEY FEATURES

- Waterproof LED exit light is designed for outdoor and wet environments
- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating
- Letters 6" height with 3/4" stroke, interchangeable red or green letters
- Universal J-box mounting pattern suitable for wall mount applications
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, local and state codes. Compliant with California Title 20

Outdoor Rated Exit Signs Available in Red or Green with Battery Backup Options.



EM BATTERY BACKUP



WET LOCATION RATED



IP65



120-277V

## PERFORMANCE

Catalog Number	Finish	Remote Head	Self Diagnostic	Letter Color	Input Power	Input Current @ 120V (A)	Input Current @ 277V (A)	Input Voltage (V)	Battery Voltage	Maximum Output Wattage (W)
EXITOUT	White	No	No	Red / Green Switchable	3.5W	0.026A	0.015A	120-277V	3.6V	0.8W
EXITOUT-G		Yes								

## TECHNICAL SPECIFICATIONS

### CONSTRUCTION

**Product Type**

Emergency unit, wet location rated

**Housing Material**

Thermoplastic housing 5VA flame rating

**Housing Finish**

White housing

**Lens Panel**

Red or green letter options available

**Lettering**

Supplied with two faces for single or double face installation

**Face Configuration**

Field-installable, removable chevron directional indicators for all configurations

**Illumination Source**

Long-life LEDs provide diffuse illumination of exit face

**Remote Capable**

No

### INSTALLATION

**Mounting**

Universal J-Box mounting pattern

**Application**

Can be mounted on top, side or end mount

### ELECTRICAL

**Operating Frequency**

60 Hz

**Operating Temperature**

32°F to 104°F (0°C to 40°C)

**Power Factor**

0.8

### EMERGENCY CHARACTERISTICS

**Battery Backup**

Yes

**Emergency Illumination**

Minimum 90 minutes emergency operation

**Battery**

Nickel-Metal Hydride

**Battery Voltage**

3.6V

**Recharge Time**

Maximum 24 hours for full recharge time

**Battery Operating Temperature**

32°C to 104°C (0°F to 40°F)

**Testing Method**

Integrated test switch & charge indicator

### COMPLIANCE

**Listings**

UL Listed, UL924 Compliant

**Environment**

Suitable for use indoors in dry and damp environments

**IP Rating**

IP65

**Illumination standard**

NEC and OSHA illumination standards

**California Title 20 Compliant**

Yes

**California Energy Commission (CEC) Status**

Lawful for sales in California

**RoHS**

Mercury and UV free. RoHS-compliant components

**FCC**

Complies with Part 15 of the FCC Rules

### OTHER

**Warranty**

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).


# EXITOUT Exit Signs



## DIMENSIONS

EXITOUT / EXITOUT-G

Weight: 3.8 lbs

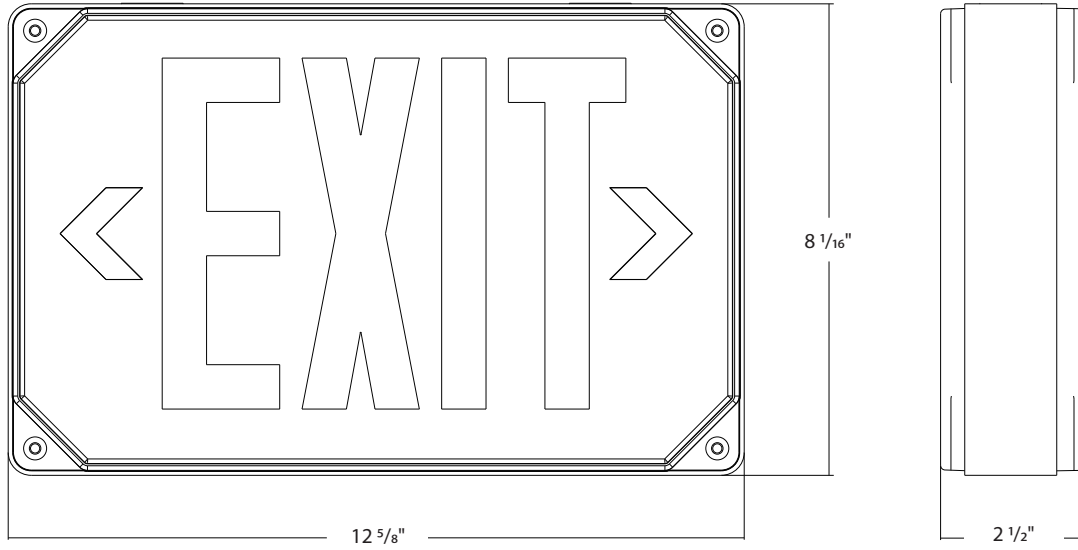

## ORDERING INFO

Catalog Number	UPC	Case Pack
EXITOUT	192552020220	6
EXITOUT-G	192552020244	6

## ORDERING MATRIX

Family	Remote Capacity	Lettering Color	Battery Backup	Housing Color	Number of Sides
EXITOUT	Blank Not Remote Capable	Blank Red Lettering G Green Lettering	Blank Battery Backup	Blank White	Blank Universal One Side or Doubled-Sided Faces with Removable Left/Right Arrows