


INSTRUCTIONS

MIRROR LIGHT INSTALLATION




RAB Lighting is committed to creating high-quality, affordable, well-designed and energy-efficient LED lighting and controls that make it easy for electricians to install and end users to save energy. We'd love to hear your comments. Please call the Marketing Department at 888-RAB-1000 or email: marketing@rablighting.com


**** DON'T TOSS IT—RECYCLE IT! MAKE THE SUSTAINABLE CHOICE BY RECYCLING THIS FIXTURE AT END OF LIFE WITH A LICENSED RECYCLING PROVIDER. ****




LM1832 LM2436
LM4836 LM7236
LMFB2436

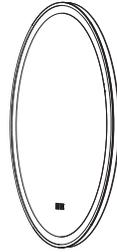

LMFBR36
LME2432

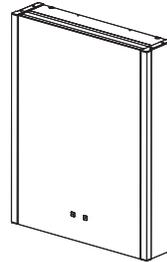

LMCB2028

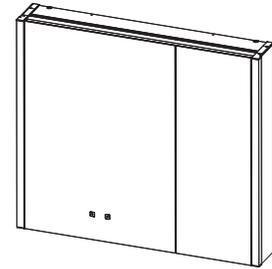

LMCB3228

IMPORTANT

READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

RAB fixtures must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

WARNING: Make certain power is OFF before installing or maintaining fixture. No user serviceable parts inside.


CAUTION: For proper weatherproof function all gaskets must be seated properly and all screws inserted and tightened firmly. Apply weatherproof silicone sealant around the edge of the ceiling mounting box and/or junction box. This is especially important with an uneven ceiling surface. Silicone all plugs and unused conduit entries.

WARNING: Risk of electric shock. Disconnect the power before performing the following procedures. A qualified electrician should route all electrical wiring.


CAUTION: Risk of personal injury. This product is heavy. Get assistance lifting and moving the product. Never operate this mirror if the electrical power cable is damaged, the mirror is not working properly, the mirror was dropped or damaged, or dropped into water. Return the mirror to a service center for examination and repair. Do not use outdoors. Keep the electrical power cable away from heated surfaces.

WHAT'S IN THE BOX


LM1832
LM2436
LM4836
LM7236
LME2432
LMFB2436
LMFBR36




Mirror Light (1pcs)




Plastic Expansion Screw (ø8mm, 4pcs)



Screw (M5, 4pcs)




Terminal (2pcs)



Mounting Bracket (2pcs)

LMCB2028
LMCB3228



Mirror Light Cabinet (1pcs)




Mounting Accessories (1pcs) (12pcs) (12pcs)




Screw (M5, 4pcs)




Plastic Expansion Screw (ø8mm, 4pcs)




Terminal (2pcs)



Glass Partition (2pcs)



Mounting Bracket (1pcs)



Installation Cardboard (1pcs)

INSTRUCTIONS

MIRROR LIGHT INSTALLATION




RAB Lighting is committed to creating high-quality, affordable, well-designed and energy-efficient LED lighting and controls that make it easy for electricians to install and end users to save energy. We'd love to hear your comments. Please call the Marketing Department at 888-RAB-1000 or email: marketing@rablighting.com

**** DON'T TOSS IT—RECYCLE IT! MAKE THE SUSTAINABLE CHOICE BY RECYCLING THIS FIXTURE AT END OF LIFE WITH A LICENSED RECYCLING PROVIDER. ****

MIRROR LIGHT INSTALLATION


Determine and mark the mounting bracket holes based on the product's installation height, dimensions, and the required installation orientation (*horizontal or vertical*), ensuring the holes remain level. (Fig. 1)

Fig. 1

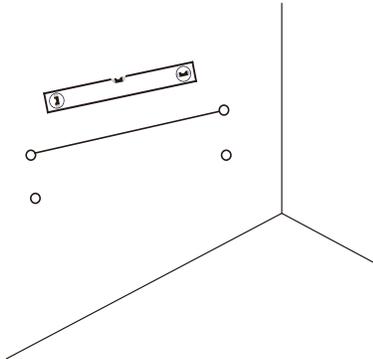

1. When determining the height of the product, verify that the mirror will clear all obstacles (*such as a faucet or light fixture*). Provide a minimum distance of 3" (76 mm). (Fig. 2)
2. Locate and mark stud locations.
3. Mark the centerline of the mirror.


Fig. 2

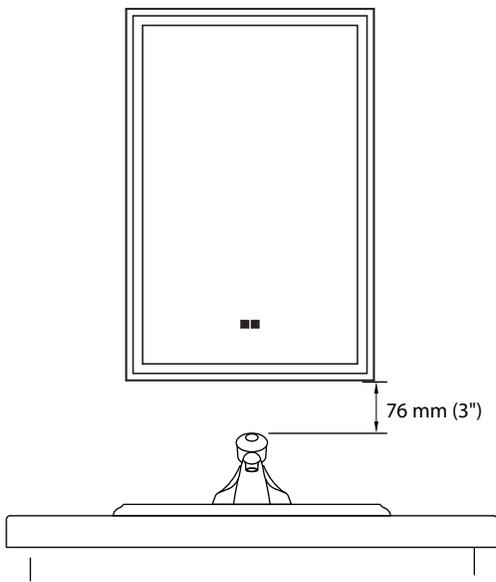

MIRROR LIGHT INSTALLATION (*cont'd*)

Drill holes ($\varnothing 8\text{mm}$) and install plastic expansion screws according to the marked points on the wall. (Fig. 3)

Fig. 3

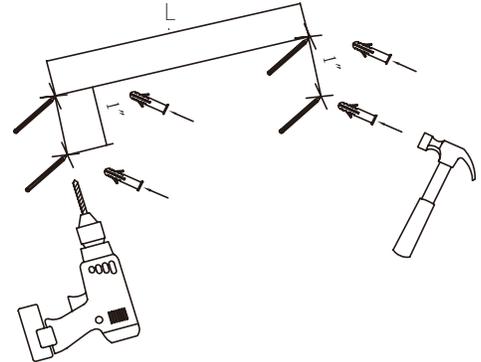

Catalog Number	Size of L	
	Verticality	Horizontal
LM1832	12"	24"
LM2436	12"	24"
LM4836	12"	24"
LM7236	24"	32"
LME2432	12"	12"
LMFB2436	12"	24"
LMFBR36	12"	12"


Install the mounting bracket. (Fig. 4)

Fig. 4



Connect the the electrical power cable to the main power cable, then mount the product onto the mounting bracket and ensure proper installation. (Fig. 5)

Fig. 5

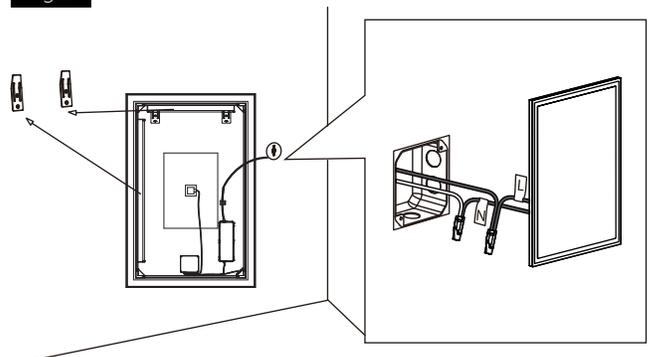

INSTRUCTIONS

MIRROR LIGHT INSTALLATION




RAB Lighting is committed to creating high-quality, affordable, well-designed and energy-efficient LED lighting and controls that make it easy for electricians to install and end users to save energy. We'd love to hear your comments. Please call the Marketing Department at 888-RAB-1000 or email: marketing@rablighting.com

**** DON'T TOSS IT—RECYCLE IT! MAKE THE SUSTAINABLE CHOICE BY RECYCLING THIS FIXTURE AT END OF LIFE WITH A LICENSED RECYCLING PROVIDER. ****

MIRROR LIGHT INSTALLATION (cont'd)

Connect the the electrical power cable to the main power cable, then mount the product onto the mounting bracket and ensure proper installation. (Fig. 6)


Fig. 6

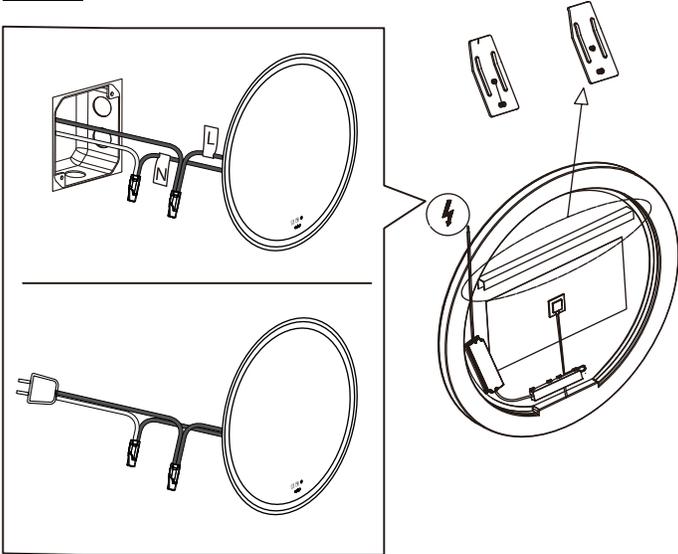

CAUTION

This strap is for decorative purposes only and must not be used for installation or fixation. Please mount the LED mirror onto the mounting bracket. (Fig. 7)


Fig. 7

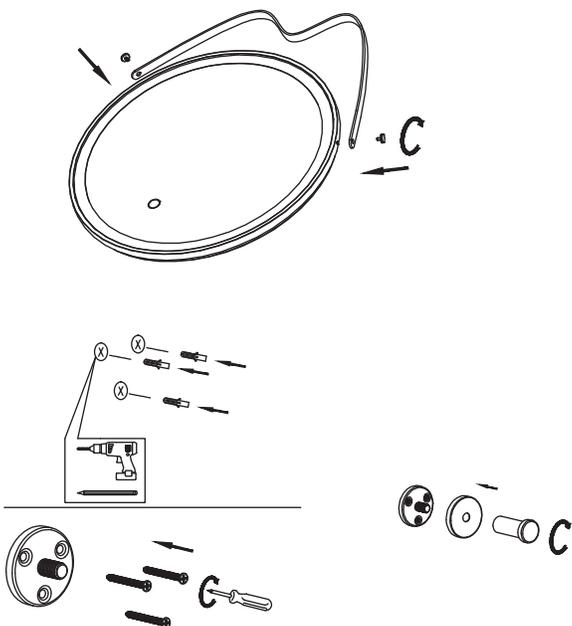

MIRROR LIGHT INSTALLATION (cont'd)

Note: This strap is for decorative purposes only and must not be used for installation or fixation. Please mount the LED mirror onto the mounting bracket. (Only for LMFBR36 & LME2432). (Fig. 8)

Fig. 8

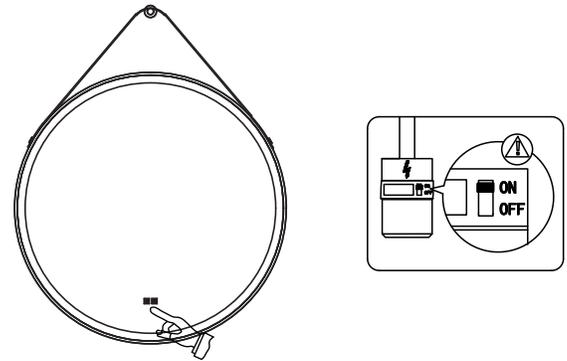


MIRROR LIGHT CABINET INSTALLATION

Determine and mark the mounting bracket holes based on the product's installation height, dimensions, and the required installation orientation (*horizontal or vertical*), ensuring the holes remain level.

Based on the product's installation height, fix the installation cardboard on the wall (*painter's tape can be used*). Then mark the positions according to the holes on the cardboard, remove the cardboard, and install all mounting accessories on the wall as per the instruction diagram. (Fig. 9)

Fig. 9

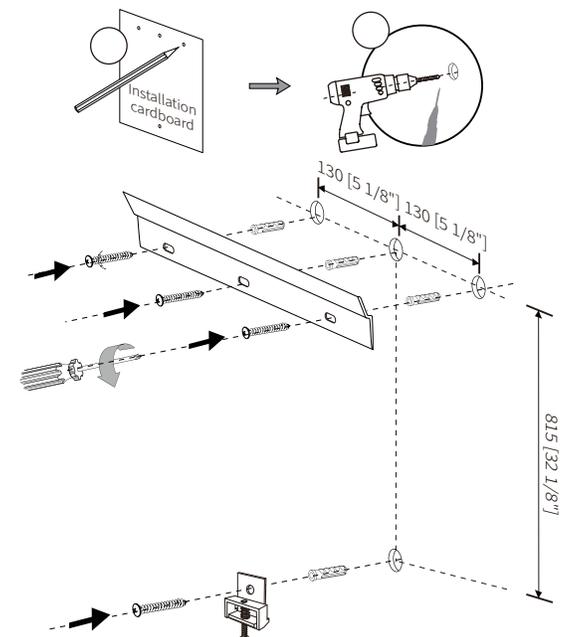

INSTRUCTIONS

MIRROR LIGHT INSTALLATION




RAB Lighting is committed to creating high-quality, affordable, well-designed and energy-efficient LED lighting and controls that make it easy for electricians to install and end users to save energy. We'd love to hear your comments. Please call the Marketing Department at 888-RAB-1000 or email: marketing@rablighting.com

**** DON'T TOSS IT—RECYCLE IT! MAKE THE SUSTAINABLE CHOICE BY RECYCLING THIS FIXTURE AT END OF LIFE WITH A LICENSED RECYCLING PROVIDER. ****

MIRROR LIGHT CABINET INSTALLATION (cont'd)


Connect the the electrical power cable to the main power cable, then mount the product onto the mounting bracket and ensure proper installation. (Fig. 10)

Fig. 10

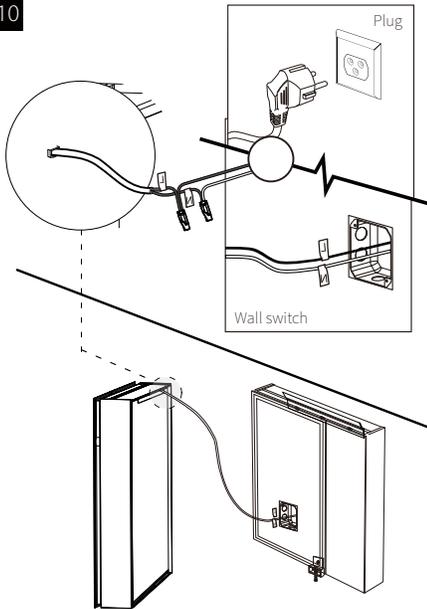

After hanging the medicine cabinet in place, tighten the fastening screws at the bottom to ensure the entire cabinet does not move. (Fig. 11)


Fig. 11

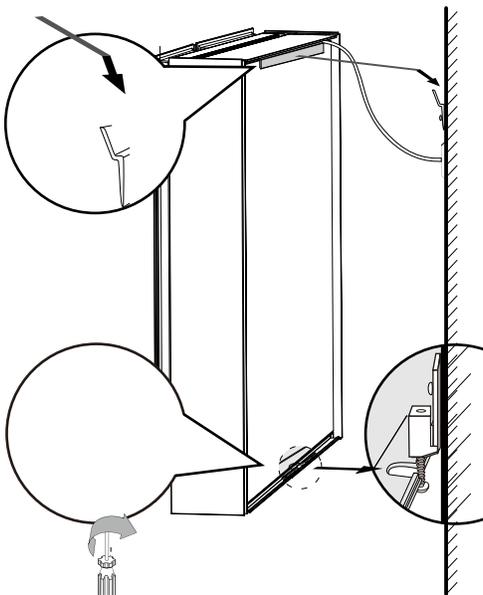

MIRROR LIGHT CABINET INSTALLATION (cont'd)


According to your usage habits, fix the glass partition at the appropriate height using plastic accessories. (Fig. 12)

Fig. 12

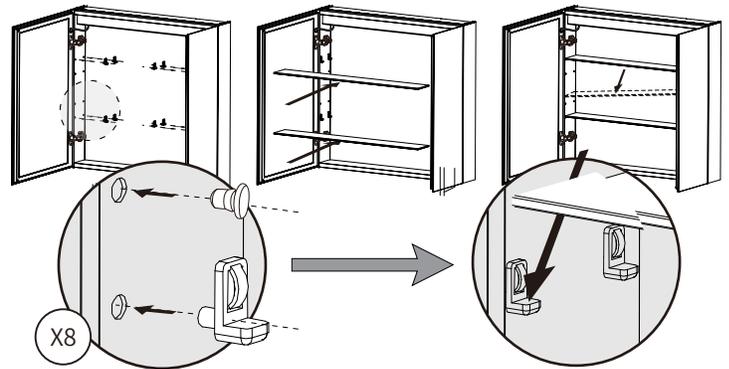

According to the diagram, adjust the screws on the hinges to align the cabinet door both horizontally and vertically. (Fig. 13)

Fig. 13

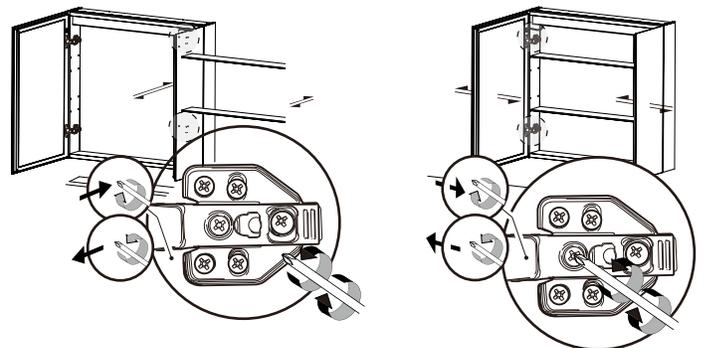

INSTRUCTIONS


MIRROR LIGHT INSTALLATION




RAB Lighting is committed to creating high-quality, affordable, well-designed and energy-efficient LED lighting and controls that make it easy for electricians to install and end users to save energy. We'd love to hear your comments. Please call the Marketing Department at 888-RAB-1000 or email: marketing@rablighting.com

**** DON'T TOSS IT—RECYCLE IT! MAKE THE SUSTAINABLE CHOICE BY RECYCLING THIS FIXTURE AT END OF LIFE WITH A LICENSED RECYCLING PROVIDER. ****


DIMENSIONAL DRAWINGS

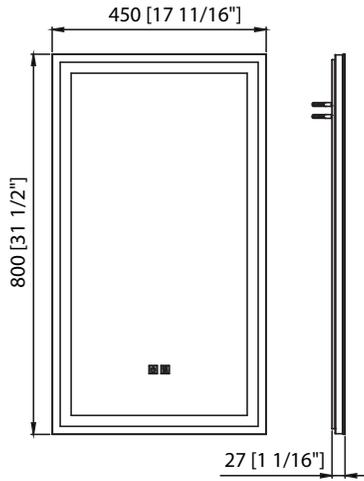


LM1832

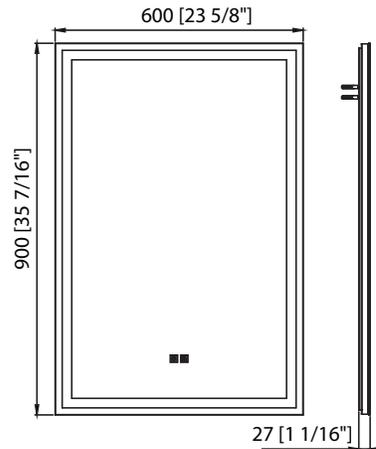

LM2436

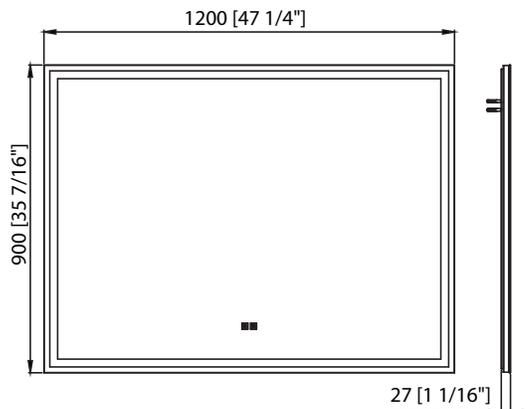

LM4836

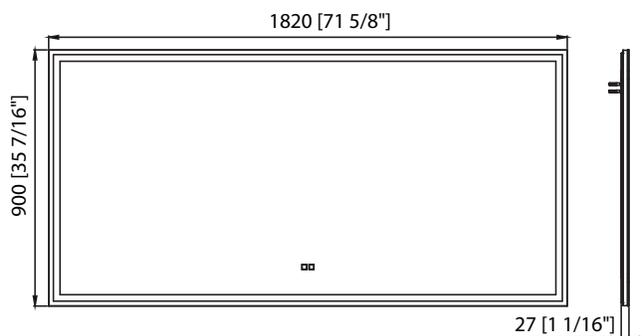

LM7236

INSTRUCTIONS


MIRROR LIGHT INSTALLATION




RAB Lighting is committed to creating high-quality, affordable, well-designed and energy-efficient LED lighting and controls that make it easy for electricians to install and end users to save energy. We'd love to hear your comments. Please call the Marketing Department at 888-RAB-1000 or email: marketing@rablighting.com

**** DON'T TOSS IT—RECYCLE IT! MAKE THE SUSTAINABLE CHOICE BY RECYCLING THIS FIXTURE AT END OF LIFE WITH A LICENSED RECYCLING PROVIDER. ****


DIMENSIONAL DRAWINGS *(cont'd)*

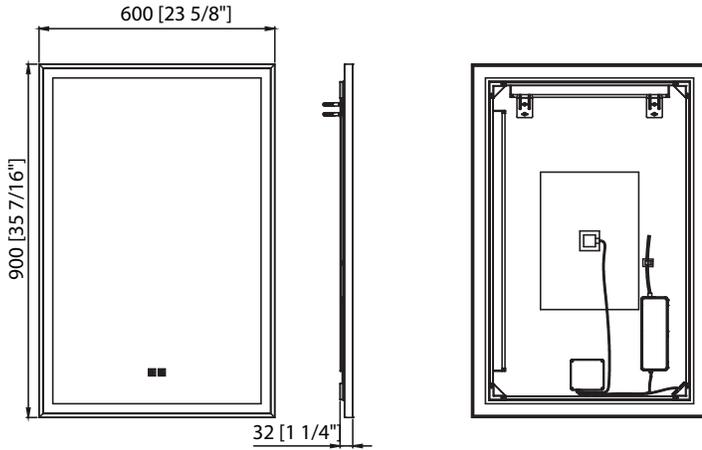


LMFB2436

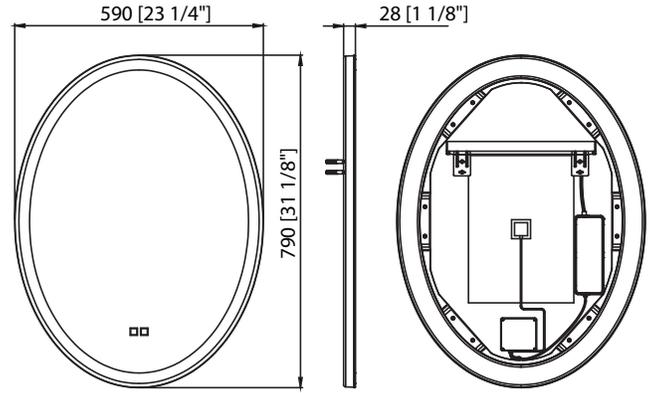


LME2432

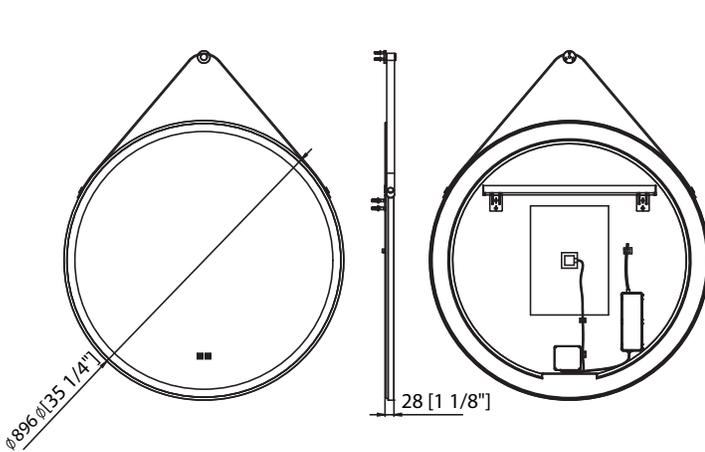

LMFB36

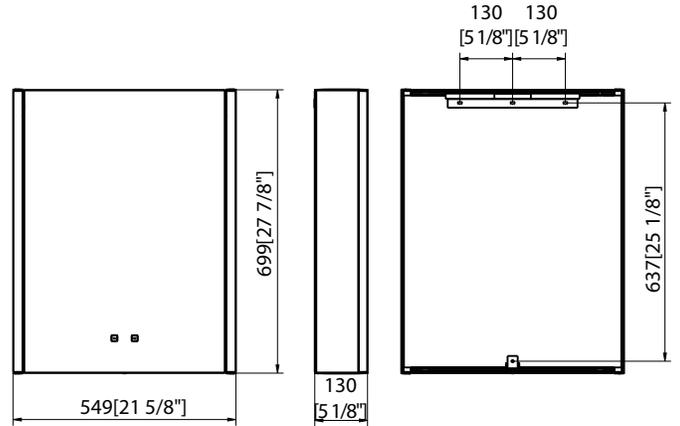

LMCB2028

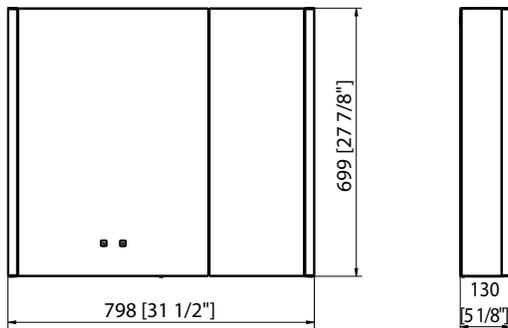

LMCB3228

INSTRUCTIONS

MIRROR LIGHT INSTALLATION



RAB Lighting is committed to creating high-quality, affordable, well-designed and energy-efficient LED lighting and controls that make it easy for electricians to install and end users to save energy. We'd love to hear your comments. Please call the Marketing Department at 888-RAB-1000 or email: marketing@rablighting.com

**** DON'T TOSS IT—RECYCLE IT! MAKE THE SUSTAINABLE CHOICE BY RECYCLING THIS FIXTURE AT END OF LIFE WITH A LICENSED RECYCLING PROVIDER. ****

TOUCH SENSOR OPERATION INSTRUCTIONS



Colour Temperature(CCT) Change and Dimming

1. To select the preferred CCT, press the button turn the light on/off until the correct CCT is achieved.(2700K/4000K/6500K).
2. To dim the light, hold down the button until desired brightness is achieved.
3. Memory function: The last working mode will be remembered after 8 seconds.



Defogger

1. Defogger on (short touch)- Defogger off (short touch).
2. Defogger will switch off automatically after 30 minutes.

CONSUMER RESPONSIBILITIES

The DISTRIBUTOR's mirrors products will remain beautiful for many years if you properly care for them. The DISTRIBUTOR does not recommend the use of harsh abrasive cleansers on any of its products. Harsh cleansers will damage the finish of your mirror.

MAINTENANCE

For daily maintenance, use a wet cloth and a soft liquid cleaner. Never use abrasive cleaners or strong bleach, scrapers, metallic brushes, or other objects or any products which can graze or tarnish surfaces.

LIMITED 3 YEARS WARRANTY

This warranty extends only to the original owner user for personal household use only. For commercial uses, additional limitations may apply.

1. The DISTRIBUTOR warrants, mirrors to be free from defects in workmanship and materials under normal use and service for a period of three(3) year.
2. The DISTRIBUTOR will, at its election, repair, replace, or make appropriate adjustment where the DISTRIBUTOR optional inspection discloses any such defects occurring in normal usage within the warranty periods.
3. Please note that the DISTRIBUTOR is not responsible for installation or removal costs.
4. Modification of any mirror's components may void the warranty. This warranty does not cover any claim arising from abuse, misuse, negligence, accident, improper installation or operation on the part of the purchaser. This warranty is void if the DISTRIBUTOR's product is subject to alterations, or if repairs were done to the mirror unit.
5. This warranty does not extend to any components installed by dealers, installers or by any party other than the DISTRIBUTOR.
6. Implied warranties, including that of merchantability or fitness for a particular purpose, are expressly limited in duration to the duration of this warranty.
7. The DISTRIBUTOR disclaims any liability for special, incidental or consequential damages.

THE SOLE REMEDY PROVIDED BY THIS WARRANTY IS THE REPAIR OR REPLACEMENT OF DEFECTIVE PRODUCTS.

THIS WARRANTY DOES NOT COVER THE COST OF REMOVAL OR INSTALLATION OF NEW PRODUCTS.

THE WARRANTY WILL BE VOID IF THIS ITEM IS INSTALLED WITH OBVIOUS VISUAL DEFECTS.



© 2026 RAB LIGHTING INC.
MIRROR-IN-0126
P-102325

Easy Answers

rablighting.com
Visit our website for product info

Tech Help Line
Call our experts: 888 722-1000

e-mail
Answered promptly - sales@rablighting.com

Free Lighting Layouts
Answered online or by request

RAB WARRANTY: RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.