


INSTRUCTIONS

UFO TEMP LIGHT INSTALLATION



RAB Lighting is committed to creating high-quality, affordable, well-designed and energy-efficient LED lighting and controls that make it easy for electricians to install and end users to save energy. We'd love to hear your comments. Please call the Marketing Department at 888-RAB-1000 or email: marketing@rablighting.com

TEMPBAY-130

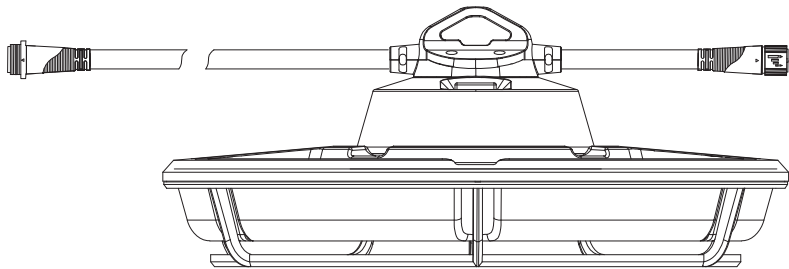

IMPORTANT

READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

RAB temp light must be wired in accordance with the National Electrical Code and all applicable codes. Proper grounding is required for safety.

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

WARNING:

Please read this manual carefully before use, make sure the application is in accordance with the instructions.

Operating temperature: -30°C to 45°C (-22°F to 113°F).

To reduce the risk of electric shock and fire, do not exceed string maximum wattage including any additional string loads. Maximum number of connection lamps:

120V - 4PCES Max

277V - 10PCES Max


This device is suitable for wet locations, IP65 waterproof. Disconnect the power to avoid shock when the equipment is wet.

This device is not intended for use with emergency exits.

This luminaire must be installed, tested and maintained by professionals using special equipment.

CAUTION - RISK OF FIRE

BOX INCLUDES

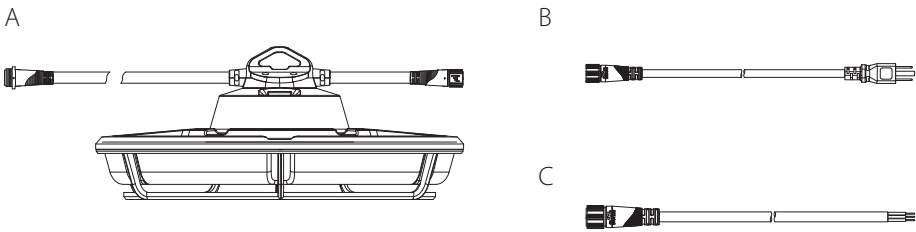

Part	Description
A	Lamp body
B	120V Plug
C	1 ft input cable

Note: These instructions do not cover all details or variations in equipment nor do they provide for every possible situation during installation, operation or maintenance.

INSTRUCTIONS

UFO TEMP LIGHT INSTALLATION



RAB Lighting is committed to creating high-quality, affordable, well-designed and energy-efficient LED lighting and controls that make it easy for electricians to install and end users to save energy. We'd love to hear your comments. Please call the Marketing Department at 888-RAB-1000 or email: marketing@rablighting.com

OPTIONALS


TEMP-PLUG/277

277V Temp Light with L7-20P plug, connect flexibly to 277 voltage input.



TEMP-CBL

100-277V Temp Light 25ft extension cable with three M15 female connector, make it easily to daisy chain without wiring.

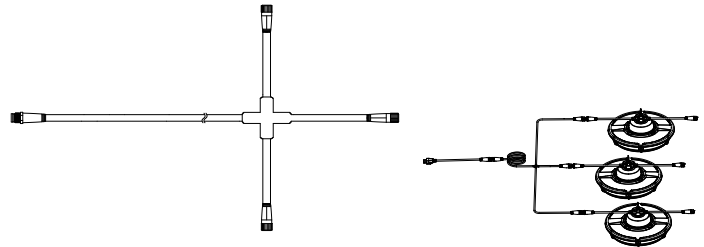

INSTALLATION


Step 1. Turn off the power before installation.

Step 2. The installation steps for a single lamp is (Fig. 1) and (Fig. 2) only.

Step 3. The installation steps for 2 or more products repeat (Fig. 1) and (Fig. 2) then move to (Fig. 3), connect to 120V plug or TEMP-PLUG/277(optional) and 1 ft input cable for power input


Caution - Maximum number of lamp connections: 120V - 4PCES Max 277V - 10PCES Max Lamps may not work as advertised if the number of connected lamps exceeds the allowable quantity. Lamp can work normally after removing redundant lamps.

Fig. 1

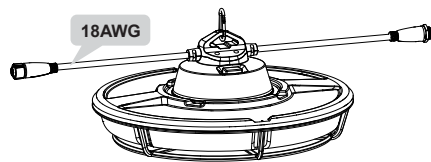


Hang on secure fixed wall or object by the base hook.

Fig. 2

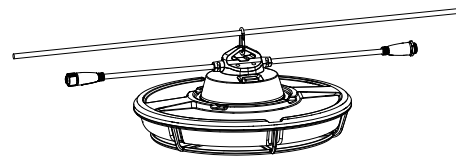

Ensure the fixed wall or object is strong enough to hold 66 lbs.

Fig. 3

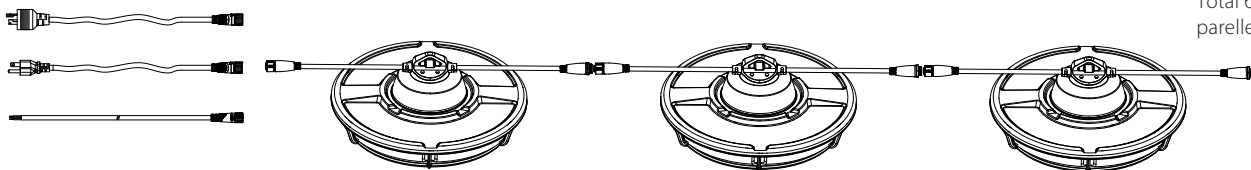

Fast to link more lamps, connect to 120V plug or TEMP-PLUG/277(optional) and 1 ft input cable for power input

NOTICE

Total 6A max in parallel connection

Easy Answers

rablighting.com
Visit our website for product info

Tech Help Line
Call our experts: 888 722-1000

e-mail
Answered promptly - sales@rablighting.com

Free Lighting Layouts
Answered online or by request