

TOMO Field-Adjustable Linear Light



TOMO2



TOMO4



TOMO8



Field-adjustable, fancy wrap



0-10V



100,000 HOURS



FIELD ADJUSTABLE



DAMP RATED

PROJECT:

DATE:

TYPE:

PREPARED BY:



KEY FEATURES

- Available in following sizes / **selectable** wattages:
TOMO2: 2FT - 24/18/12W (Factory default 18W)
TOMO4: 4FT - 48/36/24W (Factory default 36W)
TOMO8: 8FT - 96/72/48W (Factory default 72W)
- Available **field-adjustable** CCTs: 5000/4000/3500/3000K
- **End-to-end** connector available for continuous run mounting
- 5-Year, No-Compromise Warranty
- **UL listed** for damp locations
- **DLC listed**

TECHNICAL SPECIFICATIONS

COMPLIANCE

UL Listed

Suitable for damp locations

DLC Listed

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

CATALOG#	DLC ID
TOMO2	S-241173
TOMO4	S-6KWZJ1
TOMO8	S-NOVM87

LED CHARACTERISTICS

LEDs

Long-life, high-efficacy, discrete, surface-mount LEDs

Color Consistency

4-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

Color Uniformity

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

CONSTRUCTION

Cold Weather Starting

The minimum starting temperature is -20°C (-4°F)

Maximum Ambient Temperature

Suitable for use in up to 55°C (131°F)

Mounting

Comes standard with two mounting accessories: aircraft cable for secure, suspended mounts and a stainless bracket for easy mounting to junction boxes.

Housing

Cold Rolled Carbon Steel (SPCC)

Lens

Diffused Polymethyl Methacrylate (PMMA)

Green Technology

Mercury and UV free. RoHS-compliant components.

Finish

Formulated for high durability and long lasting color

FIELD ADJUSTABILITY

TOMO2: 2FT - 24/18/12W (Factory default 18W)

TOMO4: 4FT - 48/36/24W (Factory default 36W)

TOMO8: 8FT - 96/72/48W (Factory default 72W)

Available **field-adjustable** CCTs: 5000/4000/3500/3000K (Factory default 4000K)

TECHNICAL SPECIFICATIONS

ELECTRICAL

Drivers:

Constant Current, Class 2, Class P, 120-277V, 50/60 Hz,
12W: 120V: 0.10A, 208V: 0.06A, 240V: 0.05A, 277V: 0.05A
18W: 120V: 0.15A, 208V: 0.09A, 240V: 0.08A, 277V: 0.07A
24W: 120V: 0.20A, 208V: 0.12A, 240V: 0.10A, 277V: 0.09A
36W: 120V: 0.30A, 208V: 0.18A, 240V: 0.15A, 277V: 0.13A
48W: 120V: 0.40A, 208V: 0.23A, 240V: 0.20A, 277V: 0.18A
72W: 120V: 0.60A, 208V: 0.35A, 240V: 0.30A, 277V: 0.26A
96W: 120V: 0.80A, 208V: 0.47A, 240V: 0.40A, 277V: 0.35A

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems.
Requires separate 0-10V DC dimming circuit. Dims down to 5%.

THD:

TOMO2-24W: 7.4% at 120V, 9.8% at 277V
TOMO4-48W: 7.1% at 120V, 11.3% at 277V
TOMO8-96W: 6.5% at 120V, 11.9% at 277V

Power Factor:

TOMO2-24W: 99.6% at 120V, 98.9% at 277V
TOMO4-48W: 99.6% at 120V, 98.9% at 277V
TOMO8-96W: 99.7% at 120V, 98.7% at 277V

Battery Backup:

Battery backup will operate the LED Lamp for 90 minutes if power falls.
Wired for 120-277V.

Surge Protection:

1kV to 2kV

Note: All values are typical (tolerance +/- 10%)

LIGHTCLOUD

Lightcloud Controller Installed:

- Integrated/embedded networked lighting control
- Luminaire-level lighting control
- Fixture, Zone, and plug-load control from one powerful device
- LLLC - Capable of switching, 0-10V dimming, power/energy monitoring
- Can also be used to extend the range of Lightcloud
- Mesh network communication protocols
- Offers the capability to set the maximum light output to a less-than-maximum state of an individual luminaire at the time of installation or commissioning. The High-End Trim functionality is field reconfigurable via the Lightcloud mesh network communication protocols.
- The Lightcloud Controller can be attached to the fixture, junction box, or electrical panel
- DLC system - N1XMLOEATBA
- Communication Protocol: Zigbee
- Line of Sight: 1,000 feet
- Obstructions: 100 feet

LIGHTCLOUD BLUE

Lightcloud Blue Installed

Lightcloud Blue is a Bluetooth Mesh wireless lighting control system that allows you to control RAB's various compatible devices. With RAB's patent-pending Rapid Provisioning technology, devices can be quickly and easily commissioned for residential and large commercial applications using the Lightcloud Blue mobile app. Each device in a system can communicate with any other device, eliminating the need for a Gateway or Hub and maximizing the control system's reach.

LIGHTCLOUD BLUE (CONTINUED)

DLC system - N1XMLOEATBA

Learn more at www.lightcloud.com

Gateway Required

No

Communication Protocol

Bluetooth Mesh

Range

Up to 60 feet between standard building materials

Up to 200 feet clear line of sight

Spacing Criteria

Lightcloud Blue devices should be placed within the specified range to communicate within the Bluetooth Mesh network.

Factory Reset

Method 1: Delete from App

Open the app and access the device settings for the paired device. Be sure that the device is online and select 'Delete'. The device will flash on/off 5 times and return to full brightness.

Method 2: Manual

Locate the device identification button at the top of the Controller under the Lightcloud logo. Press and hold this button for 10s or until the indicator light begins flashing red. If the Controller is attached to a fixture, the fixture will also flash on/off 5x.

Status Indicator

The status indicator light is located around the circumference of the top of the Controller.

Solid Green - Nano is paired to the Lightcloud Blue app

Flashing Red - Nano has been restored to default factory settings

Device Identification Button

Located at the top of the controller under the Lightcloud logo.

Once the Controller has been provisioned to the Lightcloud Blue mobile app this button offers the following functionality:

- Press once to rapid identify this device in the Lightcloud Blue mobile app
- Press twice to toggle circuit on and off
- Press twice and hold to set dim level
- Press and hold for 10s to reset the device to factory settings and into pairing mode

Sensor Connection Type

RJ09

Max Mounting Height

8 to 12 feet

Detection Range

20 ft. diameter at 9 ft. mounting height

Default Setting

Uncommissioned State:

Sensor Status: Enabled

Motion Sensitivity: High

Brightness when triggered : 100%

Hold time: 1 minute

Standby to dim: 20%

Standby time: 1 minute

When vacant: Off

Commissioned State:

Sensor Status: Disabled, once enabled the following default are set.

Motion Sensitivity: High

Brightness when triggered: Last on status

Hold time: 20 minutes

When vacant: Off

TOMO Field-Adjustable Linear Light



TECHNICAL SPECIFICATIONS

LIGHTCLOUD BLUE(CONTINUED)

Sensor Type

Passive Infrared

Sensing Type

Occupancy or Vacancy

Sensor Sensitivity

Low/Medium/High

Occupied Actions

On or On at a Dim Level

Vacant Options

Off or On at a Dim Level

Occupancy Timeout

1 minute to 240 minutes

Daylight Sensing

The sensor will determine to trigger the light(s) on or not based on the daylight threshold level set in the Lightcloud Blue mobile app.

Daylight Threshold

150 lux to 1500 lux

MICROWAVE OCCUPANCY SENSOR W/DAYLIGHT SENSING, MULTI-FUNCTION SENSOR (OPTIONAL)

Capacity Load: 400VA at 120VAC, 800VA at 230VAC, 1000VA at 277VAC

Operating Temperature: -20°C to +60°C (-4°F to +140°F)

Relay: Zero-cross relay

Maximum Mounting Height: 16.4 feet

Customizable Detection Area: 10, 50, 75 or 100%

Time Delay: 5s, 30s, 1min, 10min, 20min, 30min

Cut-Off Period: 0s, 10s, 1min, 5min, 10min, 30min, 1hr, Bi-Level

Cut-Off Dimming level: 10, 20, 30, 50%

Cut-Off Power: Less than 1W

Daylight Threshold: About 25 fc for disabled

Sensor Principle: High Frequency

Microwave Frequency: 5.8GHz +/- 75MHz

Microwave Power: <0.2mW

Max Detection Range: 26 ft. diameter at 16 ft. mounting height

Detection Angle: About 30 to 150 degree

Remote Control: Adjust settings using remote control (catalog# MSR1).

Only available with 0-10V dimming driver options.

OTHER


Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the BUY American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Warranty

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

DIMENSIONS

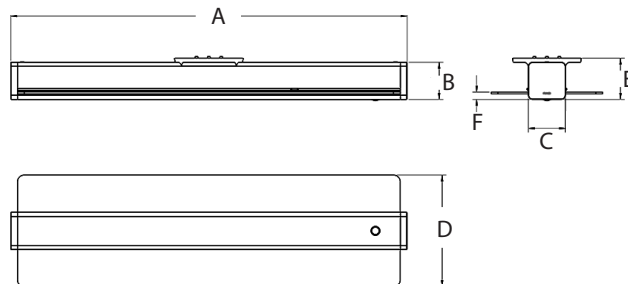

Model#	A	B	C	D	E	F	Weight
TOMO2	24"	2 1/4"	2 1/4"	6 3/4"	2 1/2"	1/2"	4.96 lbs
TOMO4	48"	2 1/4"	2 1/4"	6 3/4"	2 1/2"	1/2"	8.99 lbs
TOMO8	96"	2 1/4"	2 1/4"	6 3/4"	2 1/2"	1/2"	17.90 lbs

TOMO Field-Adjustable Linear Light



PERFORMANCE

TOMO2	5000K	4000K	3500K	3000K	5000K	4000K	3500K	3000K	5000K	4000K	3500K	3000K
WATTAGE	24W				18W				12W			
INPUT WATTS	24.6W	24.1W	24.2W	24.6W	18.1W	18.0W	18.1W	18.3W	12.6W	12.5W	12.5W	12.6W
LUMENS	3,332	3,222	3,177	3,016	2,478	2,398	2,375	2,254	1,697	1,629	1,617	1,540
EFFICACY (LM/W)	135.4	133.7	131.3	122.6	135.4	133.2	131.2	123.2	134.7	130.3	129.4	122.2
CRI	81	84	84	81	81	84	84	81	81	84	84	82
VOLTAGE RATINGS	120-277V											

TOMO4	5000K	4000K	3500K	3000K	5000K	4000K	3500K	3000K	5000K	4000K	3500K	3000K
WATTAGE	48W				36W				24W			
INPUT WATTS	48.6W	48.1W	47.9W	48.6W	34.8W	34.3W	34.5W	35.0W	23.4W	23.1W	23.2W	23.0W
LUMENS	6,603	6,413	6,187	5,929	4,789	4,626	4,531	4,308	3,223	3,098	3,023	2,888
EFFICACY (LM/W)	135.9	133.3	129.2	122.0	137.6	134.0	131.3	123.1	137.7	134.1	130.3	125.6
CRI	82	84	84	82	83	84	84	82	82	84	84	82
VOLTAGE RATINGS	120-277V											

TOMO8	5000K	4000K	3500K	3000K	5000K	4000K	3500K	3000K	5000K	4000K	3500K	3000K
WATTAGE	96W				72W				48W			
INPUT WATTS	94.2W	91.9W	92.3W	93.8W	69.5W	68.2W	68.4W	69.3W	46.9W	46.1W	46.3W	46.7W
LUMENS	12,028	11,813	11,283	10,988	9,407	8,939	8,850	8,362	6,217	6,126	5,811	5,736
EFFICACY (LM/W)	127.7	128.5	122.2	117.1	135.4	131.1	129.4	120.7	132.6	132.9	125.5	122.8
CRI	83	84	85	84	82	84	84	82	83	84	85	84
VOLTAGE RATINGS	120-277V											

ACCESSORY

Image	SKU#	UPC	Description
	TOMO CONNECT	192552003261	FIXTURE-TO-FIXTURE CONNECTOR FOR TOMO 2FT/4FT/8FT
	TOMO-REMOTE	192552003629	PIR SENSOR REMOTE CONTROL FOR TOMO

ORDERING MATRIX

TOMO

Family	Length/Wattage	Color Temp	Finish	Voltage	Options				
TOMO	-								
	2 4 8	2 FT (24/18/12W) 4 FT (48/36/24W) 8 FT (96/72/48W)	BLANK	5000/4000/3500/3000K	BLANK	White	BLANK	120-277V, 0-10V Dimming	Blank /PIR Passive Infrared Occupancy Sensor /E Battery Backup* /LC Lightcloud Controller /LC/E Lightcloud Controller w/ Battery Backup* /PIR/E Passive Infrared Occupancy Sensor w/ Battery Backup* /LCB Lightcloud Blue-enabled /LCBS Lightcloud Blue-enabled w/ PIR sensor /LCB/E Lightcloud Blue-enabled w/ battery backup* /LCBS/E Lightcloud Blue-enabled w/ PIR sensor and battery backup*

*Available only for 4" and 8"