


SAGE: DASH Landscape Lighting




SA-DASHR
Round Wall Sconce



SA-DASHS
Square Wall Sconce



SA-DASHL
Line Wall Sconce



PROJECT:

DATE:

TYPE:

PREPARED BY:



KEY FEATURES

- SAGE-DASH is available in three models:
SA-DASHR: Round Wall Sconce
SA-DASHS: Square Wall Sconce
SA-DASHL: Line Wall Sconce
- CCT: 3000K
- Voltage Rating: 120-277V (Round & Square), 120V (Line)
- IP65 rated
- 5-year, limited warranty

Architectural landscape lighting



IP65
IP RATING

PERFORMANCE

SA-DASH	3000K		
Type	Line	Round	Square
Input Watts	4.01W	4.19W	4.23W
Lumens	139	195	196
Lm/W	34.7	46.5	46.3
CRI	85	83	84
Voltage Rating	120V	120-277V	

Lifespan

100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations

TECHNICAL SPECIFICATIONS

CONSTRUCTION

Cold Weather Starting

Minimum starting temperature is -40°C (-40°F)

Maximum Ambient Temperature

Suitable for use in up to 45°C (113°F)

Housing

Die-cast aluminum

TECHNICAL SPECIFICATIONS

CONSTRUCTION

Mounting

SA-DASHR & SA-DASHS: Octangular J-Box or bracket for the wall-mount (J-Box not provided)

SA-DASHL: Rectangular J-Box or bracket for the wall-mount (J-Box not provided)

Lens

Polycarbonate

Gaskets

Silicone

Green Technology

Mercury and UV free. RoHS-compliant components.

Finish

Formulated for high durability and long lasting color. Available in matte bronze finish.

IP Rating

Ingress protection of IP65 for dust and water

COMPLIANCE

UL Listed

Suitable for wet locations

SAGE: DASH Landscape Lighting



TECHNICAL SPECIFICATIONS (CONTINUED)

ELECTRICAL

Drivers:

Constant Current, Class 1, 120V, 50/60 Hz

SA-DASHR: 0.04A@120V, 0.02A @208V, 0.02A @240V, 0.02A @277V

SA-DASHS: 0.04A@120V, 0.02A @208V, 0.02A @240V, 0.02A @277V

Constant Current, (DOB) Class 1, 120V, 50/60 Hz

SA-DASHL: 0.04A@120V

Surge Protection

2kV (L-N)

THD / Power factor @ Static 3000K Models:

MODEL#	THD	PF	THD	PF
	120V		277V	
SA-DASHL	14.0%	98.9%		
SA-DASHR	20.4%	97.8%	10.0%	89.7%
SA-DASHS	20.9%	97.7%	10.0%	89.9%

Note: All values are typical (tolerance +/- 10%)

LED CHARACTERISTICS

LEDs

Long-life, high-efficacy, surface-mount LEDs

Color Uniformity

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standards for Specifications for the Chromaticity of Solid State Lighting (SLL) Products, ANSI C78.377-2017.

OTHER


Warranty

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

DIMENSIONS


SA-DASHR

Weight: 2.43 lbs




SA-DASHS

Weight: 2.87 lbs



SA-DASHL

Weight: 1.98 lbs

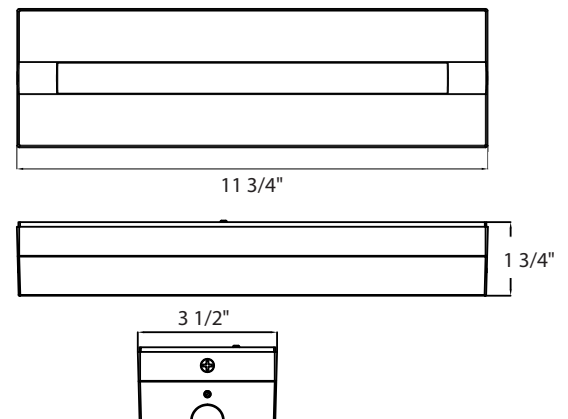

ORDERING MATRIX

SAGE (DASH)

FAMILY	SHAPE	TYPE	CCT	FINISH	DRIVER
SA	DASH				
	DASH Wall Sconce	R S L	BLANK 3000K	BLANK Matte Bronze	BLANK 120-277V * BLANK 120V **

* Available only for the round & square models

** Available only for the line model