



SAGE: LINDEN Landscape Lighting



SA-LWP
Wall Sconce



SA-LB
Bollard

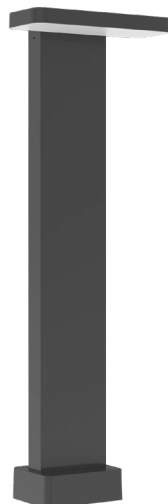

PROJECT:

DATE:

TYPE:

PREPARED BY:



KEY FEATURES

- SAGE-LINDEN is available in two models:
SA-LWP: Wall Pack
SA-LB: Bollard
- CCT: 3000K
- Voltage Rating: 120-277V
- IP65 rated
- 5-year, limited warranty

TECHNICAL SPECIFICATIONS

CONSTRUCTION

Housing

Die-cast aluminum

Mounting

SA-LWP : Octangular J-Box or bracket for the wall-mount
(J-Box not provided)

SA-LB : 4pcs anchor bolts for mounting

Lens

Polycarbonate

Gaskets

Silicone

Green Technology

Mercury and UV free. RoHs-compliant components.

Finish

Formulated for high durability and long lasting color. Available in matte bronze finish.

IP Rating

Ingress protection of IP65 for dust and water

COMPLIANCE

UL Listed

Suitable for wet locations

Architectural landscape lighting



100,000
HOURS



WET
RATED

IP65

IP RATING

PERFORMANCE

SA-L	3000K	
Type	Bollard	Wall Sconce
Input Watts	8.18W	8.11W
Lumens	441	453
Lm/W	53.9	55.9
CRI	84	85
Voltage Rating	120-277V	

Lifespan

100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations

TECHNICAL SPECIFICATIONS

CONSTRUCTION

Cold Weather Starting

Minimum starting temperature is -40°C (-40°F)

Maximum Ambient Temperature

Suitable for use in up to 45°C (113°F)

