

# SLIM15 Power-Selectable Wall Pack



PROJECT:

DATE:

TYPE:

PREPARED BY:



## KEY FEATURES

- Selectable Wattage : (34W/25W/13W) Factory default 34W
- Available CCT: 3000K, 4000K and 5000K
- Voltage rating : 120V
- UL rated for wet location
- IP65 rated
- 5-years limited warranty

Field-adjustable, 120V wall pack



**IP65**  
IP RATING



## TECHNICAL SPECIFICATIONS

### COMPLIANCE

#### UL Listed

This product is UL listed for wet locations

#### DLC Listed

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

CATALOG#	DLC ID
SLIM15	S-6H8310
SLIM15Y	S-HSGKDV
SLIM15N	S-IFESPR

### LED CHARACTERISTICS

#### LEDs

Long-life, high-efficacy, surface-mount LEDs

#### Color Uniformity

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### Color Consistency

7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

### FIELD ADJUSTABLE

Selectable Wattage: 34W/25W/13W

### CONSTRUCTION

#### IP Rating

Ingress protection rating of IP65 for dust and water

#### Cold Weather setting

Minimum starting temperature is -40°C (-40°F)

#### Maximum Ambient Temperature

Suitable for use in up to 40°C (40°F)

#### Housing

Precision die-cast aluminum / Polycarbonate

#### Mounting

Hinged wiring access and conduit entries on the back sides, top and bottom make installation a snap

#### Lens

Polycarbonate lens

#### Reflector material

Mirror finish on polycarbonate

#### Green Technology

Mercury and UV free. RoHS-compliant components.

#### Finish

Formulated for high durability and long lasting color

# SLIM15 Power-Selectable Wall Pack



## TECHNICAL SPECIFICATIONS

### ELECTRICAL

#### Drivers:

**Integrated driver, 60HZ 120V**

**34W:** 120V: 0.297A

**25W:** 120V: 0.213A

**13W:** 120V: 0.11A

#### THD:

**34W:** 12.6% at 120V

**25W:** 12.3% at 120V

**13W:** 12.13% at 120V

#### Power factor:

**34W:** 99.1% at 120V

**25W:** 99.2% at 120V

**13W:** 99.2% at 120V

#### Note

All values are typical (tolerance +/- 10%)

#### Surge Protection

4kV

### PERFORMANCE

#### Lifespan

50,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations

### OTHER

#### Warranty

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).


#### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the BUY American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## DIMENSIONS

### SLIM15

Weight 2 lb

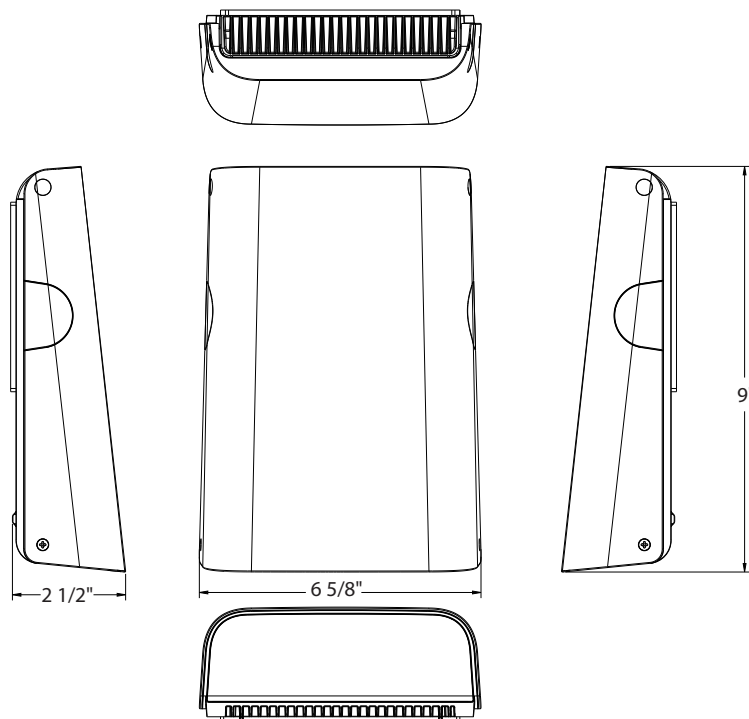

# SLIM15 Power-Selectable Wall Pack

## PERFORMANCE

### SLIM15

SLIM15	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
Wattage	34W	34W	34W	25W	25W	25W	13W	13W	13W
Input Watts	34.4W	34.3	35.3W	25.3W	24.3W	24.5W	13.1W	12.3W	12.7W
Lumens	3,638	3,695	3,907	2,760	2,711	2,827	1,467	1,398	1,493
Efficacy	105.7	107.4	110.7	109.1	111.6	115.4	120	113.7	117.6
CRI	85	85	86	85	85	86	85	84	85
Voltage Ratings	120V								

## ORDERING MATRIX

### SLIM15

Family	Wattage	Color Temperature	Finish	Driver/Voltage
SLIM15	<div>BLANK34/25/13WSelectable</div>	<div>BLANKN5000K4000K3000KY</div>	<div>BLANKWBronzeWhite</div>	<div>BLANK120V</div>