


# SLIM Field-Adjustable Wall Pack



SLIM

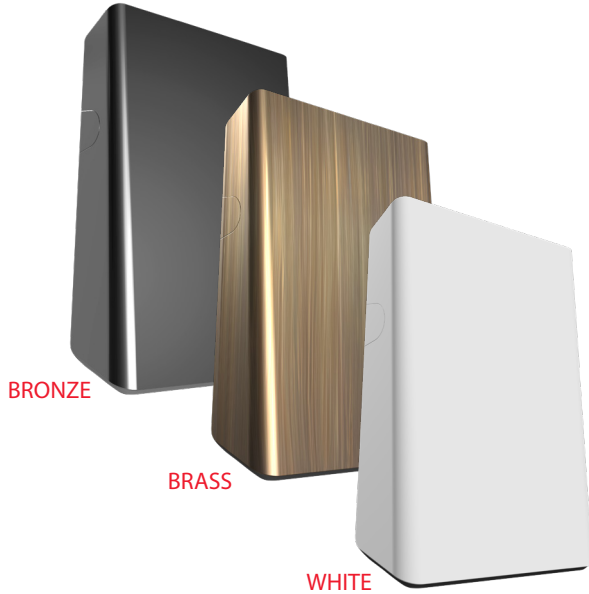

PROJECT:

DATE:

TYPE:

PREPARED BY:



## KEY FEATURES

- Available with adjustable wattages:
- 26W/18W/12W - Factory default 26W
- Field-adjustable CCT: 3000K/4000K/5000K - Factory default 4000K
- Integrated on/off photocell
- 0-10V dimming
- UL rated for wet location
- IP65 rated
- 10-year no-compromise warranty

Field-adjustable wall pack



## TECHNICAL SPECIFICATIONS

### COMPLIANCE

#### UL Listed

This product is UL listed for wet locations

#### DLC Listed

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product ID: S-IHR6QX

DLC Family ID: BBBGKA

#### ADA Compliant

Meets ADA Requirements for wall-mounted luminaires.

### LED CHARACTERISTICS

#### LEDS

Long-life, high-efficacy, surface-mount LEDs

### FIELD ADJUSTABLE

Adjustable Wattage: 26W/18W/12W - Factory default 26W

Adjustable Color Temperature: 3000K, 4000K and 5000K

### CONSTRUCTION

#### IP Rating

Ingress protection rating of IP65 for dust and water

#### Cold Weather Starting

Minimum starting temperature is -40°C (-40°F)

#### Maximum Ambient Temperature

Suitable for use in up to 40°C (40°F)

#### Housing

Bronze or White: Aluminum

Brass: Brass

#### Mounting

Heavy-duty mounting bracket with spring-hinged housing and "kick stand" allow for easy installations. Conduit entries on back and both sides.

#### Lens

Acrylonitrile styrene acrylate (ASA) /Acrylonitrile butadiene styrene (ABS)

#### Photocell

Integrated photocell included with on/off switch

#### Reflector Material

Mirror finish on polycarbonate

#### Green Technology

Mercury and UV free. RoHS-compliant components.

#### Finish

Bronze & White: Formulated for high durability and long-lasting color

Brass: Brushed and electroplated finish that will naturally patina over time

# SLIM Field-Adjustable Wall Pack



## TECHNICAL SPECIFICATIONS

### ELECTRICAL

#### Drivers:

Constant Current, Class 2, 120-277V, 50/60 Hz

26W: 120V: 0.26A, 208V: 0.13A, 240V: 0.12A, 277V: 0.11A

18W: 120V: 0.20A, 208V: 0.10A, 240V: 0.09A, 277V: 0.08A

12W: 120V: 0.13A, 208V: 0.07A, 240V: 0.06A, 277V: 0.06A

#### Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems.

Requires separate 0-10V DC dimming circuit. Dims down to 10%.

#### THD:

26W: 3.4% at 120V, 4.68% at 277V

18W: 2.95% at 120V, 5.3% at 277V

12W: 3% at 120V, 8.42% at 277V

#### Power factor:

26W: 99.8% at 120V, 96.5% at 277V

18W: 99.7% at 120V, 94.6% at 277V

12W: 99.4% at 120V, 89.6% at 277V

#### Surge Protection

4kV

#### Note

All values are typical (tolerance +/- 10%)

### PERFORMANCE

#### Lifespan

100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations

### OTHER

#### Warranty

The RAB 10-year, no-compromise warranty covers light output, color stability, driver performance, paint finish and labor. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

#### Buy American Act Compliance:


RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the BUY American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## DIMENSIONS

### SLIM

Weight: (White and Bronze) 2.9 lbs

Weight: (Brass) 5.7 lbs

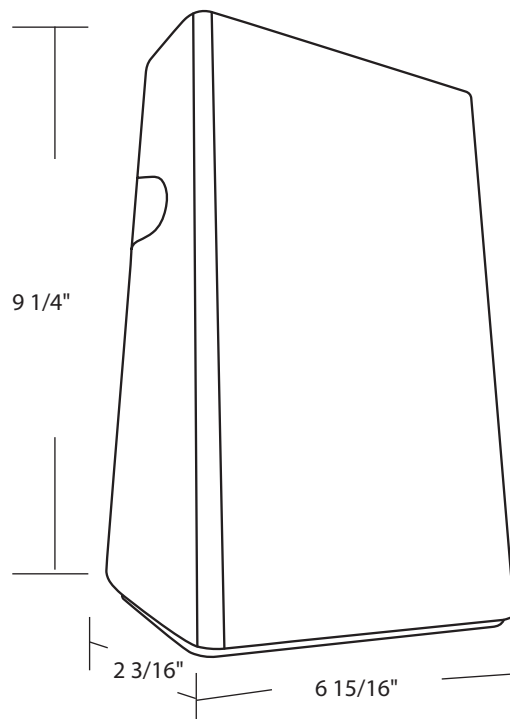

# SLIM Field-Adjustable Wall Pack

## PERFORMANCE

### SLIM

SLIM	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
Wattage	26W			18W			12W		
Input Watts	30.5W	29.4W	30.4W	22.9W	22.2W	22.8W	15.5W	15.2W	15.4W
Lumens	4,122	4,389	4,267	3,189	3,343	3,291	2,175	2,260	2,253
Efficacy	135.1	149.3	140.4	139.3	150.6	144.3	140.3	148.7	146.3
CRI	82	85	84	83	84	84	82	85	84
Voltage Ratings	120-277V								

## ORDERING MATRIX

### SLIM Field-Adjustable Wall Pack

Family	Wattage	Color Temperature	Finish	Voltage/Driver
SLIM	BLANK 26/18/12W Adjustable	BLANK 3000K/4000K/5000K Adjustable	BLANK W BR Bronze White Brass	BLANK 120V-277V, 0-10V Dimming