


4

3

2



REV

DESCRIPTION

DATE

I

D

D

C


C

B

B

A

A

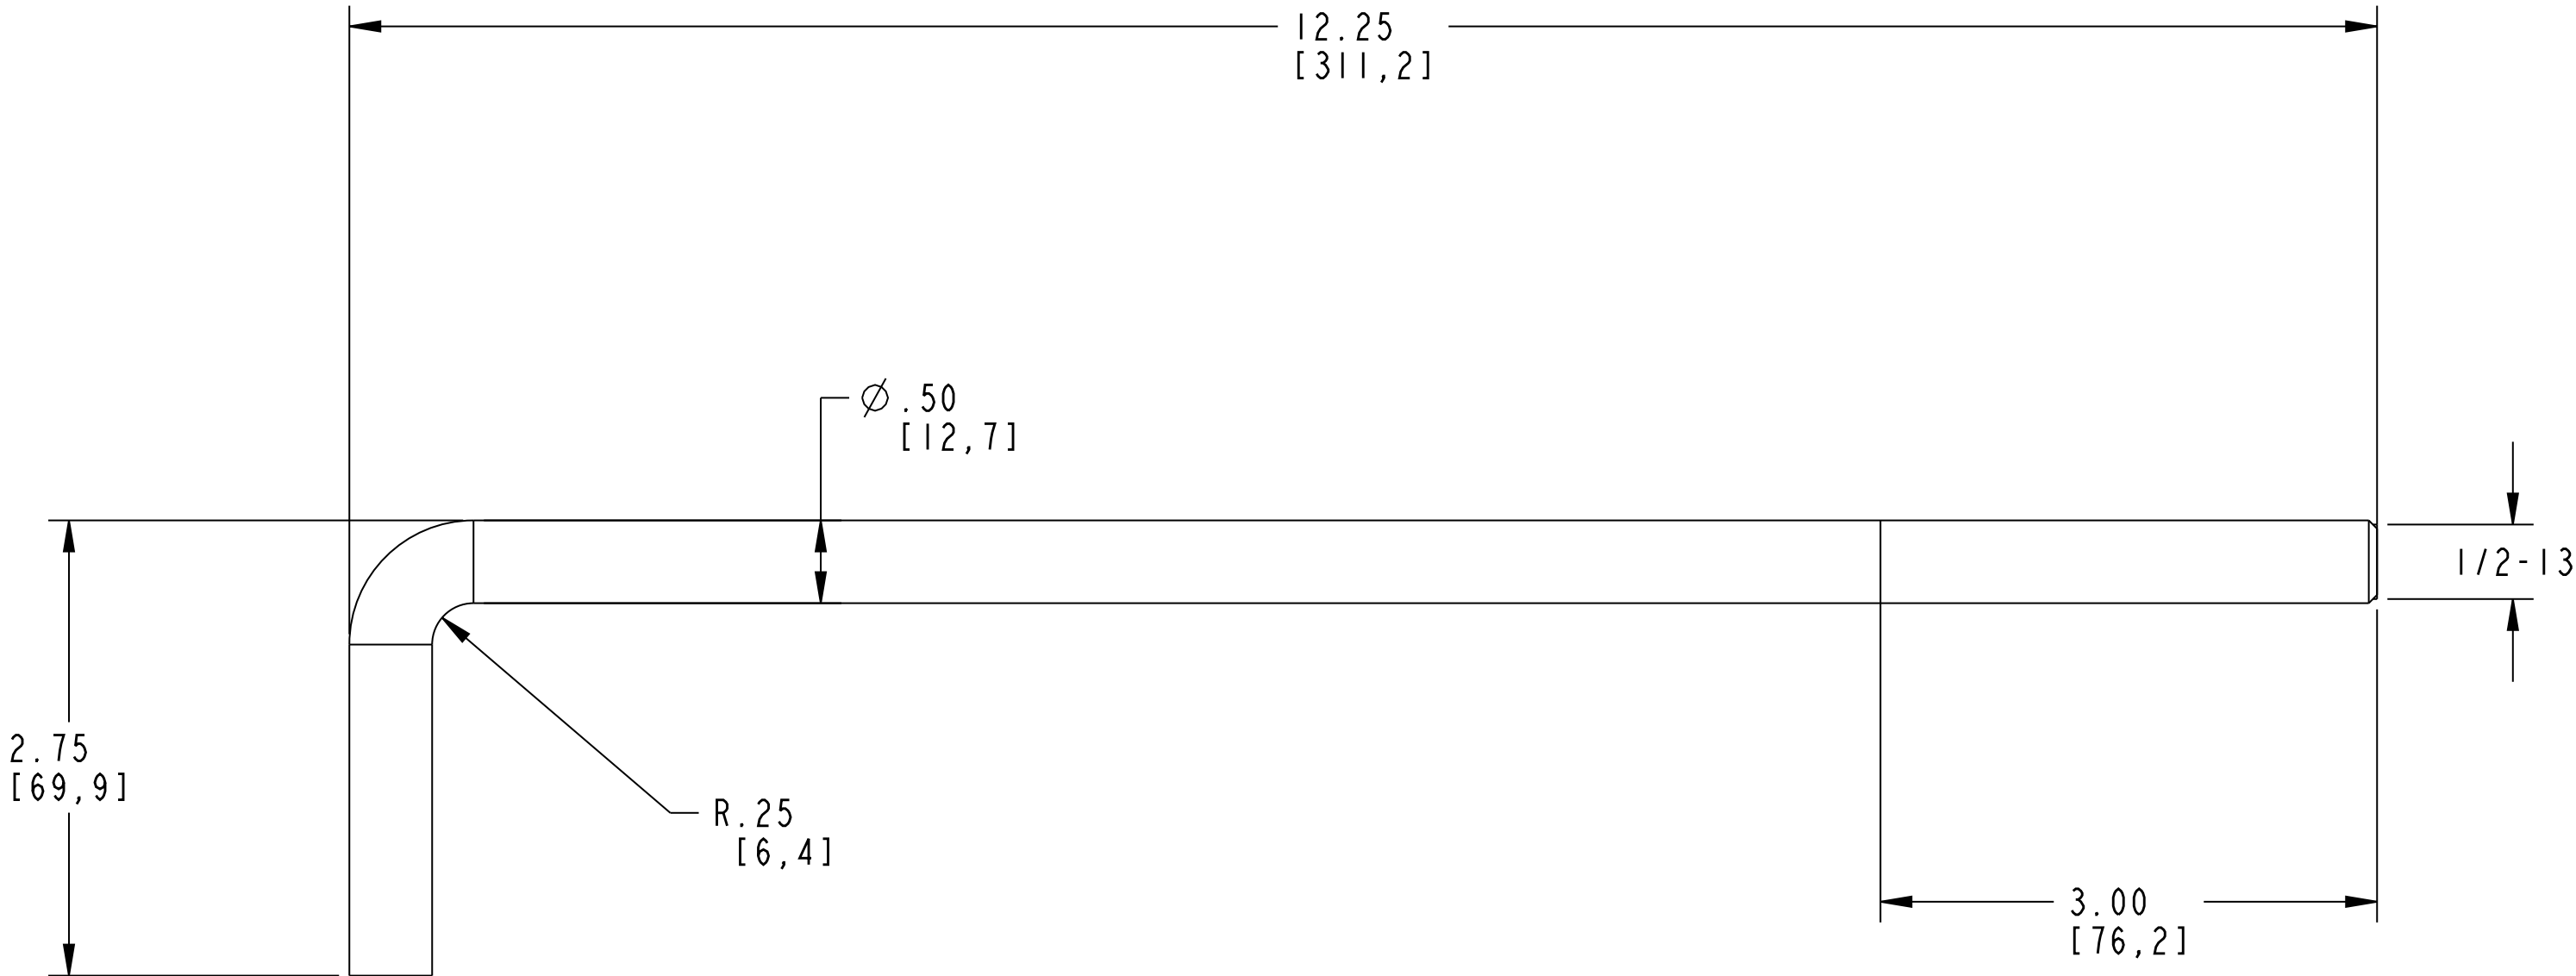

NOTES

- 1. SURFACE USE HOT DIPPED GALVANIZED.
- 2. APPLY THE ASTM F 1554-2007 GRADE 55.
Tensile Strength 517-655 MPa.
Description Yield Strength > 380 MPa.

TOOLING DRAWING
18 SEP. 2009

THIS DRAWING AND THE INFORMATION IT DISCLOSES IS THE EXCLUSIVE
PROPERTY OF RAB LIGHTING, INCORPORATED
ANY REPRODUCTION OR USE OF THIS DRAWING WITHOUT THE WRITTEN CONSENT OF
RAB LIGHTING, INC. IS STRICTLY PROHIBITED. RAB CONFIDENTIAL PATENT PENDING

RAB
L I G H T I N G

170 LUDLOW AVE., NORTHVALE, NJ 07647

TITLE

ANCHOR BOLT 1/2-13

MATERIAL:
STEEL

PART No.:
10692

DRAWING NAME:
10692_ANCHOR_BOLT-1_2-13

DATE:
11 SEP 2009

REV DATE: REV

DRAWN BY: TERRY

SCALE 1:1

SHEET: 1/1

4

3

2

1