INSTRUCTIONS GDWP3W WIRE GUARD INSTALLATION



RAB Lighting is committed to creating high-quality, affordable, well-designed and energy-efficient LED lighting and controls that make it easy for electricians to install and end users to save energy. We'd love to hear your comments. Please call the Marketing Department at 888-RAB-1000 or email: marketing@rablighting.com

IMPORTANT

READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

RAB fixtures must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

WARNING:

Make certain power is OFF before installing or maintaining fixture.

INSTALLATION


1. Wire Guard mounts to housing with (4) Screws (provided) as shown.

CLEANING & MAINTENANCE

Clean glass lens with nonabrasive glass cleaning solution. CAUTION: Be sure fixture temperature is cool enough to touch. Do not clean or maintain while fixture is energized.

- 1. Lens can be washed only after removing from fixture and only in a solution of warm water and any mild, non-abrasive household detergent, rinsed with clean water and wiped dry. Do not use chemicals to clean lens or fixture.
- 2. Do not open fixture to clean the LED's. Do not touch the LED.

Note: These instructions do not cover all details or variations in equipment nor do they provide for every possible situation during installation, operation or maintenance.

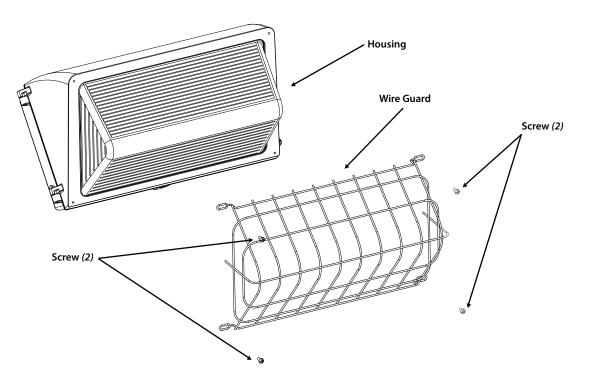



Easy Answers

 rablighting.com
 Tech Help Line Call our experts: 888 722-1000
 e-mail Answered promptly - sales@rablighting.com

 RAB WARRANTY: RAB'S warranty is subject to all terms and conditions found at rablighting.com/warranty.
 e-mail