


# RAB®

## AL22




# The new era of adjustable-optics lighting is here.

## Meet the versatile AL22 area light.


### The area light that knows how to flex.

The AL22 revolutionizes area lighting with adjustable optics that let you change beam patterns with the flick of a switch. Whether you need Type III, IV, or V distribution, this smart approach means you can fine-tune your distribution in seconds!

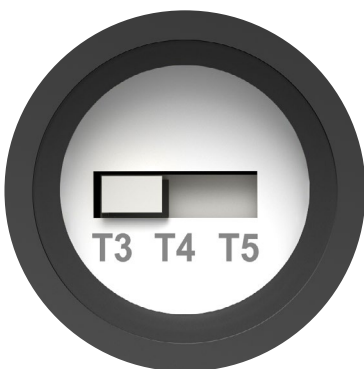


Optics Switch


Type III

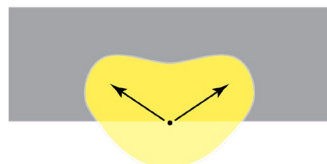

Type IV



Type V





FEATURE PAGE



100-HOUR  
LED LIFESPAN



480V



0-10V



WIRELESS  
NETWORKED  
CONTROL



5-YEAR  
LIMITED  
WARRANTY


RAB's warranty is  
subject to all terms  
and conditions found at  
[rablighting.com/warranty](http://rablighting.com/warranty)

## Two sizes, endless possibilities.

Available in two sizes with 3 selectable wattages and CCTs, the AL22 lets you fine-tune your lighting to match exactly what your site needs. It's also got an adjustable, universal pole mount that's suited for both round and square poles.



150, 100, 80W



3000K

4000K

5000K




300, 240, 200W



## Smart, future-ready design.

The AL22 comes with a standard twistlock photocell but it's also built with an integrated 7-pin receptacle and a sensor port, so you can easily add our standard or LCB-enabled MVS and PIR sensors in the field. That means you can upgrade your lighting intelligence whenever you're ready, without rewiring.

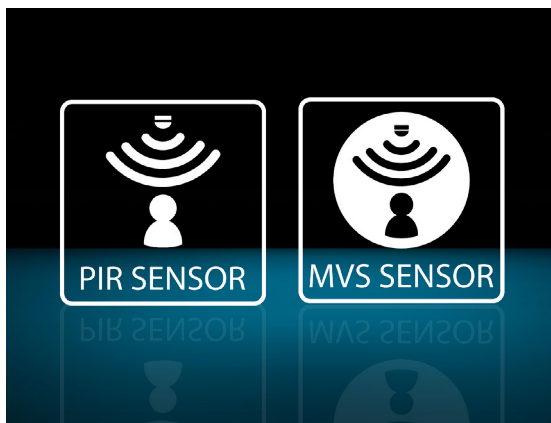

## Mounting accessories for site-wide use.

With slipfitter and wall mount accessories available, the AL22 can help you achieve a continuous look throughout an entire site. Non-adjustable pole mounts are also available for compliance needs.



SLIPFITTER  
MOUNT



WALL  
MOUNT



ADJUSTABLE  
POLE MOUNT

## Ordering Matrix

Product Family	Distribution	Wattage	Mounting	Color Temp	Finish	Driver	Options
AL22	Blank T3/T4/T5 Optics Adjustable	150 150/100/80W 300 300/240/200W	Blank Universal Adjustable Pole Mount	Blank 3000/4000/5000K CCT Adjustable	Blank Bronze White	Blank 120-277V 0-10V Dimming 480V 0-10V Dimming	Blank 7-Pin Receptacle w/Shorting Cap + 3-Pin Twistlock Photocell