

RAB®

ALBERT



The wide-body that
doesn't need the headroom.
ALBERT, our new high-output, low-profile wrap.

Wide body, low profile.

ALBERT is built on a broader footprint than most wraps so it can easily cover older fixture footprints while also delivering more light across your space, and its shallow curves keep the fixture tight to the ceiling for a cleaner look overhead.



Open, wire, close.

ALBERT's lens is hinged, so it swings down and stays with the fixture while you mount and wire. You get full access to the inside without having to fully remove it while standing on a ladder.





FEATURE PAGE



100,000-HOUR
LED LIFESPAN



120-277V



0-10V



DRY RATED



BAT. BACKUP



RAB's warranty is
subject to all terms
and conditions found at
rablighting.com/warranty



Set your light to match your space.

A corridor, an office, and a warehouse all want different light, and they used to demand different fixtures. Three selectable power levels and five CCTs come standard on every model, so you set the output and the tone on site instead of specifying around it.


Lightcloud®

Sensing that maintains your aesthetic.


Order ALBERT with a microwave or passive infrared sensor integrated into the end cap, where it stays out of the way and drop out of sight. Need smart sensing? Lightcloud Blue models connect to our wireless control system right out of the box.



MVS SENSOR

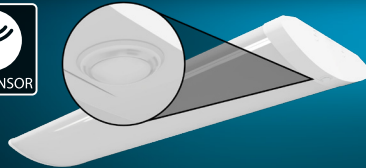


PIR SENSOR

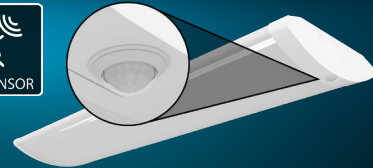


Mount it, then run it.

ALBERT can be surface or j-box mounted, and the V-hook accessory kit adds two 40-inch chains with hooks for suspended applications. Every fixture ships with a 6-pin connector for easy daisy chaining, and the joiner bracket kit can be used for clean, continuous runs down a corridor, aisle, or stairwell.

V-HOOK ACCESSORY KIT

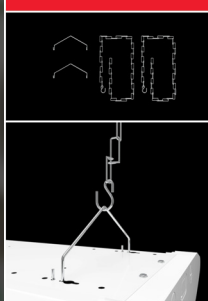


JOINER BRACKET KIT

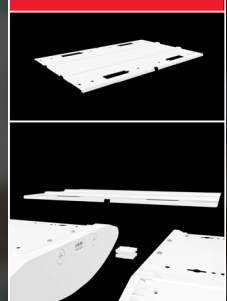

Ready for emergencies.

ALBERT is available with an emergency battery backup, so you can meet life-safety code requirements without adding a separate fixture to the layout. Order it on any 2 ft or 4 ft model, with or without a sensor.

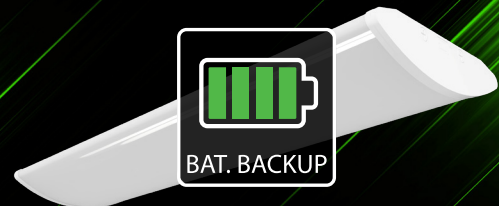

Ordering Matrix

Product Family	Size/Wattage	Color Temp	Finish	Driver	Controls	Battery Backup
ALB						
	2 2 ft, 25/20/15W 4 4 ft, 50/40/30W	Blank CCT Adjustable	Blank White	Blank 120-277V	Blank /MVS /PIR /LCBS /LCBS/MVS	Blank /E
					None Microwave Sensor Passive Infrared Sensor Lightcloud Blue w/PIR Sensor Lightcloud Blue w/MVS Sensor	None Battery Backup