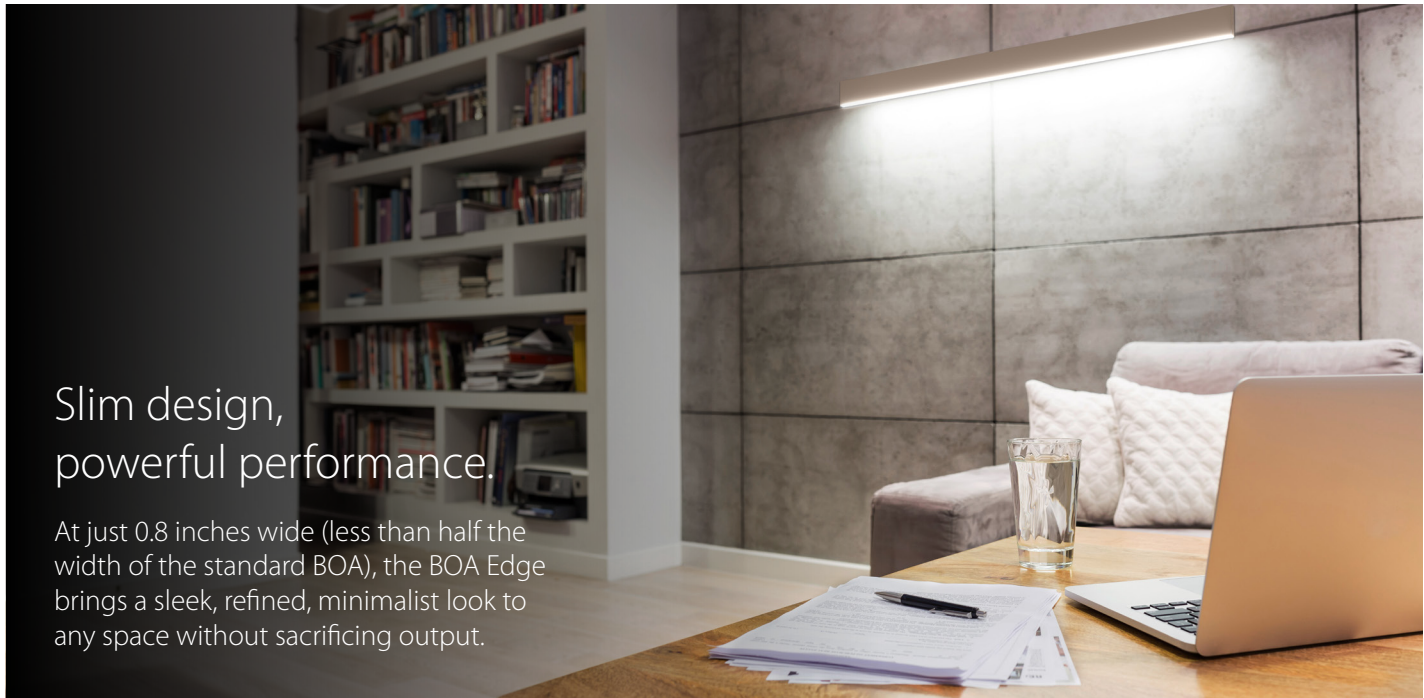


The RAB logo is displayed in a bold, red, sans-serif font in the top left corner of the advertisement.The product name 'BOA-EDGE' is enclosed in a white rounded rectangle with a thin black border, positioned in the top right corner.A large, modern office interior featuring a long white conference table surrounded by dark wood chairs. Large windows offer a view of a city skyline. A long, thin light fixture hangs above the table, illuminating the space.

Ultra-slim. Endlessly adaptable.
BOA Edge—Big flexibility in a barely-there fixture.

A close-up view of a wooden desk in a modern office. A laptop, a glass of water, and some papers are on the desk. A long, thin light fixture is mounted on the wall above the desk, providing focused lighting. In the background, there is a bookshelf and a sofa.

Slim design,
powerful performance.

At just 0.8 inches wide (less than half the width of the standard BOA), the BOA Edge brings a sleek, refined, minimalist look to any space without sacrificing output.

Uplight/Downlight

Downlight


CCT

- 3000K
- 3500K
- 4000K

Length	Wattage Options
2 ft	20W, 14W, 12W, 10W, 6W
4 ft	30W, 21W, 18W, 15W, 9W
6 ft	40W, 28W, 24W, 20W, 12W
8 ft	80W, 56W, 48W, 40W, 24W


All the flexibility your project needs.

BOA Edge is available in two configurations: downlight-only and uplight/downlight. The downlight-only version offers field-adjustable wattage, while the uplight/downlight version features static wattage with independent control over the up/down distribution. Both versions also boast field-adjustable CCT for added flexibility.

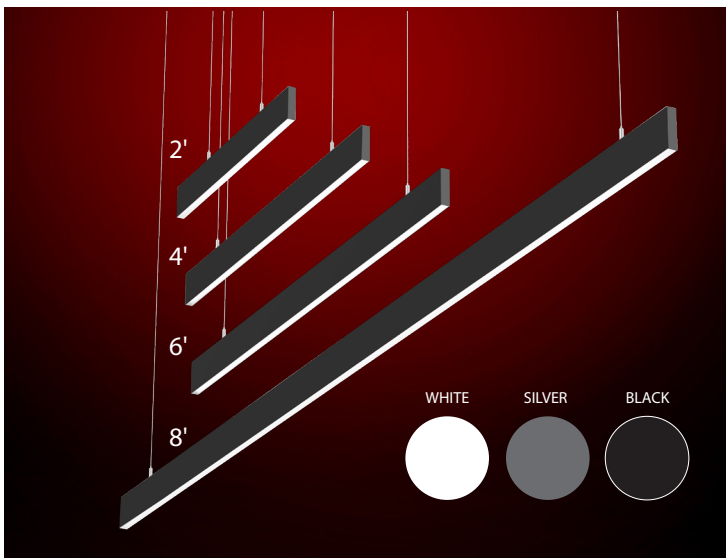

Spec it simple.

BOA Edge is available in three finishes and comes in 2, 3, 4, and 8 ft lengths with a flat, frosted lens that's ideal for diffusing light.

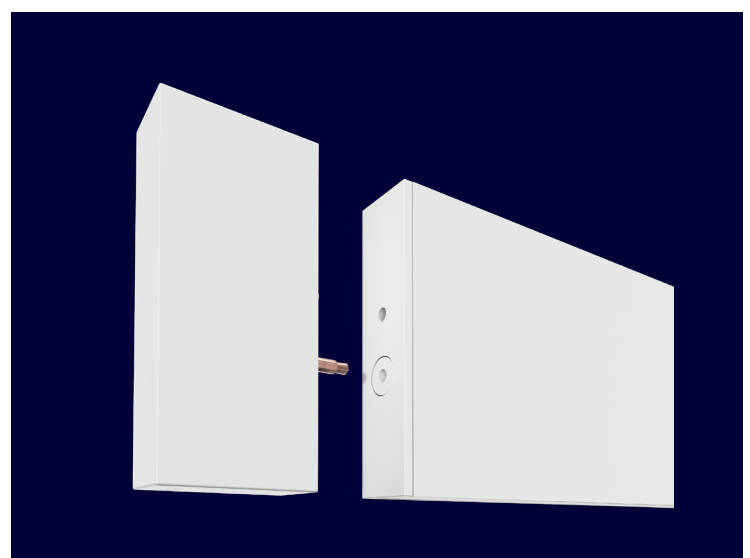

Lighting control made easy.

Need occupancy sensing? No problem! BOA Edge offers PIR and MVS sensor module accessories that plug right into your configuration. And if you need more powerful, smart control, Lightcloud Blue models of both sensors are also available for integration with our wireless lighting control system.

T-GRID MOUNT

SURFACE MOUNT

RECESSED CEILING MOUNT

Mounting accessories.

All pendant mount BOAs come standard with hardware that can accommodate dry wall, concrete, or T-bar mounting. Accessory kits are available for surface mounting (ceilings and/or walls), recessed mounting into T-grids, and recessed mounting into a ceiling. *(See ordering options below)*



FEATURE PAGE



100K-HOUR
LED LIFESPAN



120-277V



DIMMABLE



WIRELESS
CONTROLLED




5-YEAR
LIMITED
WARRANTY

RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty

Build any shape you can imagine.

With illuminated connector modules and straight extensions available in all three finishes, you can create custom runs and intricate configurations. We also offer an 82-foot roll of lens that can be cut to length on-site for a seamless look that eliminates light leakage. *(See ordering options below)*

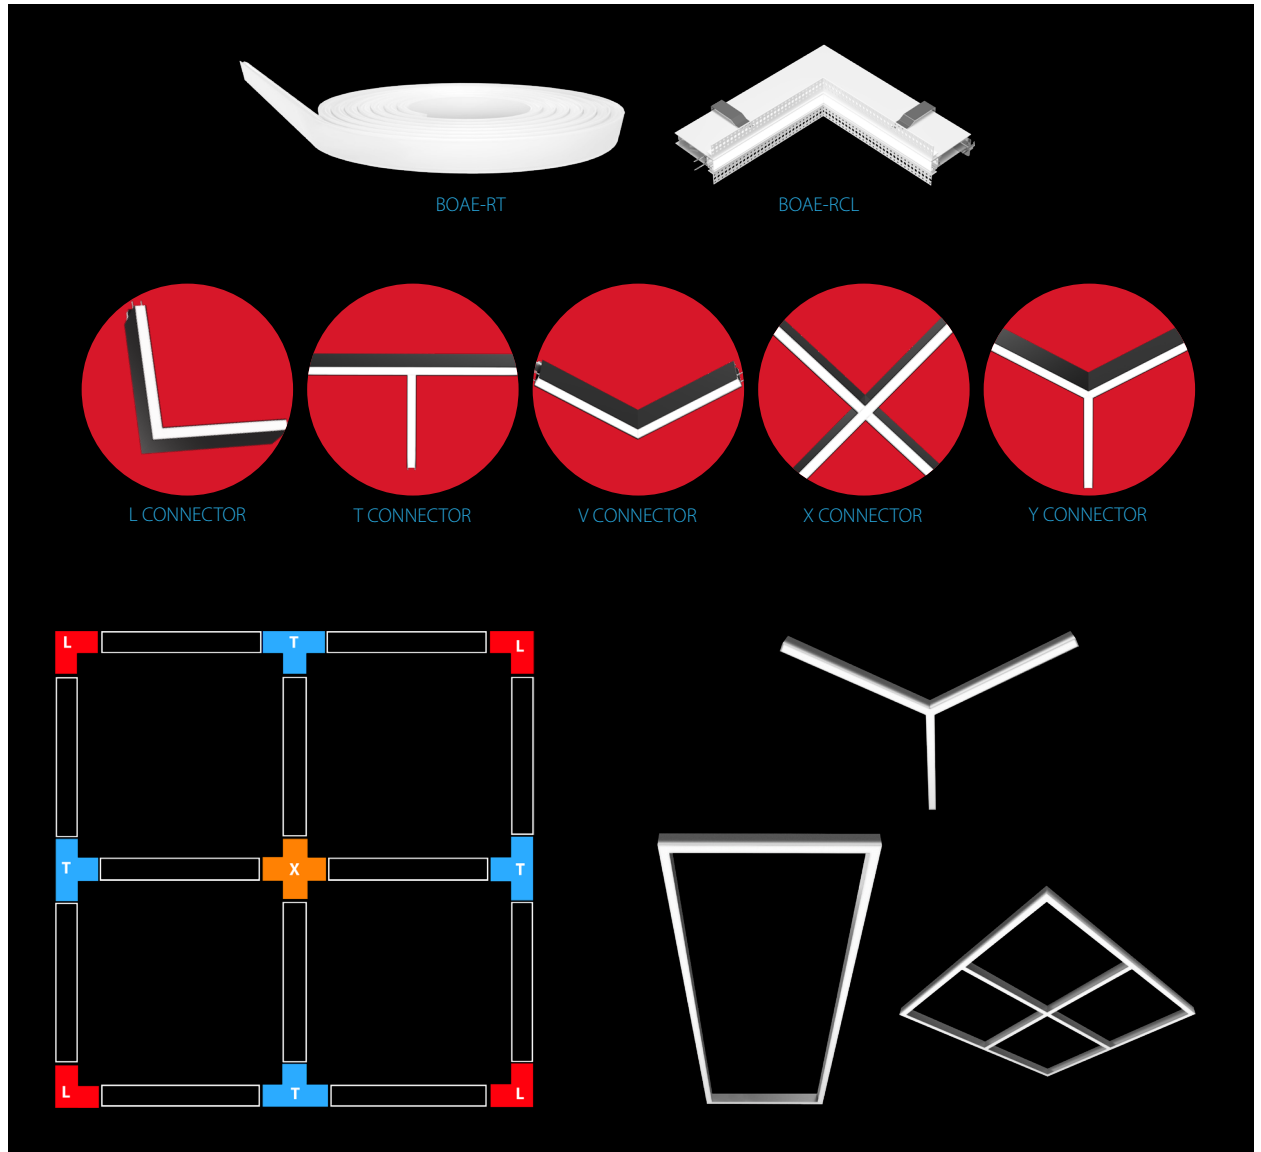

Ordering Matrices

DOWNLIGHT ONLY

Product Family	Size/Wattage	Mounting	Color Temp	Lens	Distribution	Finish	Driver						
BOAE		P											
2	2 ft, 20/14/12/10/6W	P	Pendant Mount	Blank	3000/3500/4000K	Blank	Lens	Blank	Downlight	W	White	Blank	120-277V, 0-10V Dimming
3	3 ft, 30/21/18/15/9W					S	Silver			B	Black		
4	4 ft, 40/28/24/20/12W												
8	8 ft, 80/56/48/40/24W												

UPLIGHT & DOWNLIGHT

Product Family	Size/Wattage*	Mounting	Color Temp	Lens	Distribution	Finish	Driver						
BOAE		P			U								
2	2 ft, 20W	P	Pendant Mount	Blank	3000/3500/4000K	Blank	Flat Lens	U	Uplight & Downlight	W	White	Blank	120-277V, 0-10V Dimming
3	3 ft, 30W					S	Silver			B	Black		
4	4 ft, 40W												
8	8 ft, 80W												

*5 Power Presets Down/Up: 100% / 0% (downlight only), 70% / 30%, 60% / 40%, 50% / 50%, 0% / 100% (uplight only)