

Now with more sizes  
and options!

BOA linear lighting—customize, combine, configure.

**RAB**




**CCT**

- 3000K
- 3500K
- 4000K

Length	Wattage Options
2 ft	20W, 14W, 12W, 10W, 5W
3 ft	30W, 21W, 18W, 15W, 8W
4 ft	40W, 28W, 24W, 20W, 10W
8 ft	80W, 56W, 48W, 40W, 20W

**Your space, your choice.**

All models of the BOA offer 3 selectable color temperatures. In addition, pendant models include selectable light direction (*up/down*) and recessed models offer 5 selectable wattages.

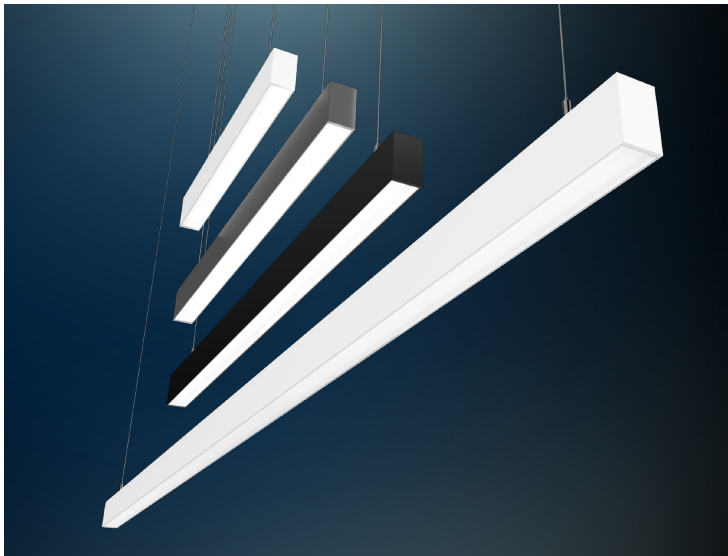


## Contemporary design.

Available in 2, 3, 4, and 8 ft lengths, the pendant BOA comes in matte black, white, and silver finishes.



## Timeless recessed mounts.

Recessed models offer a trimless design for a clean, seamless appearance. Models include both the housing and fixture as one unit with adjustable mounting brackets.

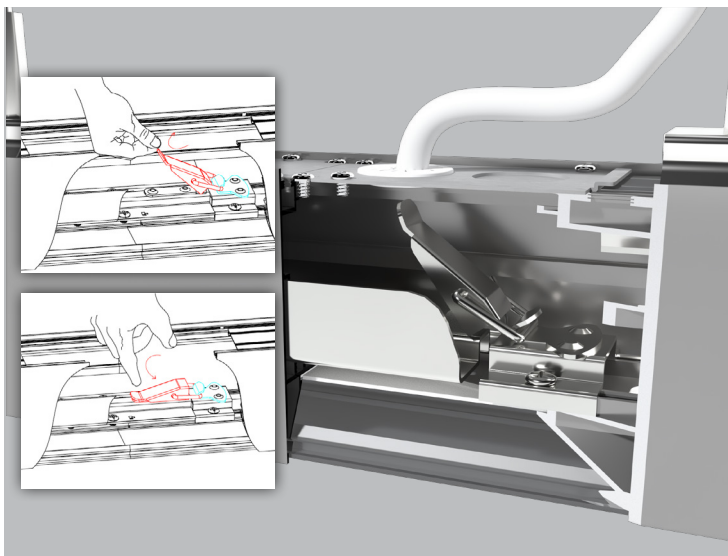

## Tool-free continuous runs.

An internal Quick-Link Connector makes it incredibly easy to create continuous runs without any tools.




## High-performance optics.


Pendant and recessed BOAs are all available with either a flat, frosted lens that's ideal for diffusing light or louvers that are excellent for directing light downward and reducing glare. All models boast 90 CRI for beautiful, accurate color rendering.



# Lightcloud®

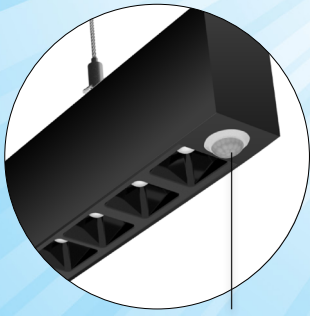

PASSIVE INFRARED  
SENSOR MODULE

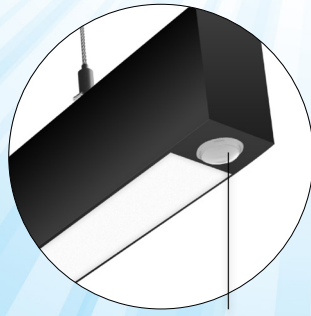


MICROWAVE MOTION  
SENSOR MODULE

## Sensing and control options.

Both microwave and passive infrared motion sensors are available as integrated endcaps on the BOA, blending seamlessly into the overall aesthetic of your lighting. Models are also offered with Lightcloud Blue compatibility.

## Completely configurable.

With the use of illuminated connectors, multiple lengths can easily be combined to create visually striking, intricate shapes. Connectors are available in all three colors and recessed models as well. We also offer an 82-foot roll of lens that can be cut to length on-site for a seamless look that eliminates light leakage. (See ordering options below)



1FT CONNECTOR



L CONNECTOR



T CONNECTOR





V CONNECTOR



X CONNECTOR



Y CONNECTOR

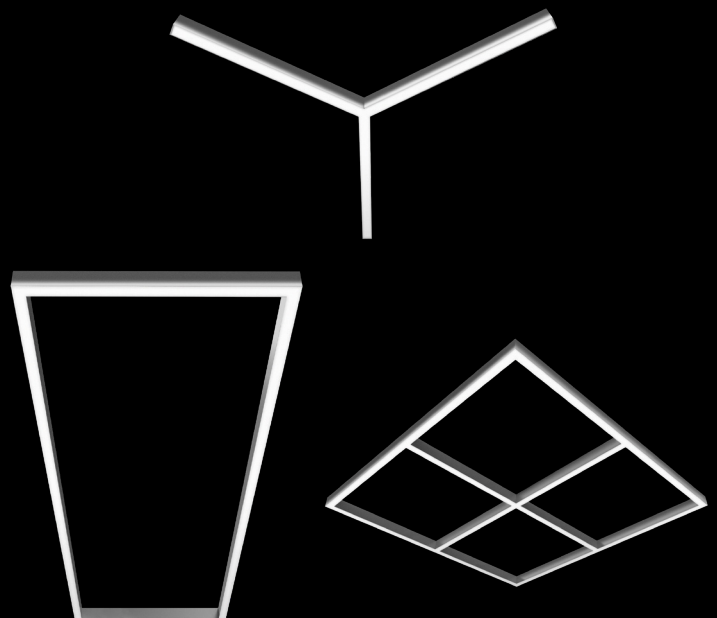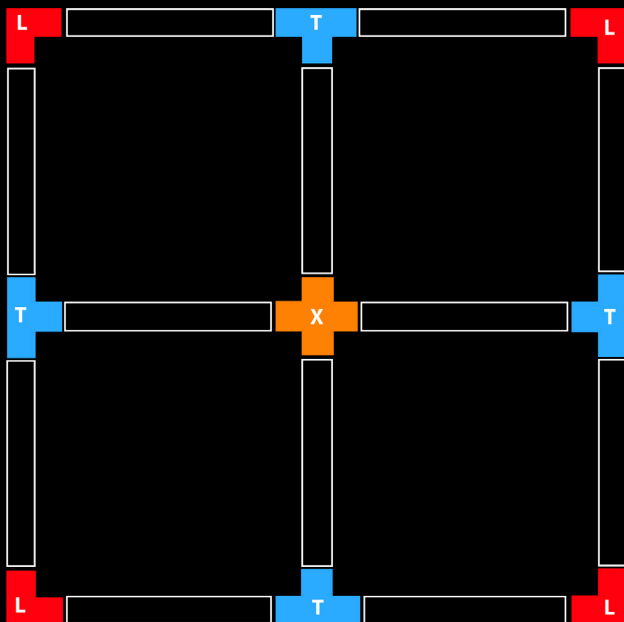



## BOA FIELD ADJUSTABLE FEATURE PAGE



50K-hour  
LED Lifespan



Dimmable



\*4 ft and 8 ft models



\*Please visit [rablighting.com](http://rablighting.com) to see which models have DLC or DLC Premium listing.



RAB's Warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty)

## Make it seamless.

An 82-foot roll of lens is available that can be cut to length on-site for a seamless look that eliminates light leakage. (See ordering options below).



## Mounting accessories.

All pendant mount BOAs come standard with hardware that can accommodate dry wall, concrete, or T-bar mounting. Accessory kits are available for surface mounting (ceilings and/or walls) and recessed mounting into T-grids.



BOA-TG  
(T-grids)



BOA-SM  
(Surface mount)



## Ordering Matrix

Product Family	Size (Wattages)	Mount	Lens	Light Output	Color Temp	Voltage	Finish	Options
BOA		P		U				
2	2 ft (20W)*	P	Pendant	Blank	Flat	U	Uplight/Downlight	Blank 3000/3500/4000K Selectable
3	3 ft (30W)*		L	Louvers				
4	4 ft (40W)*							
8	8 ft (80W)*							
*5 Presets: Down/Up 100%/0% (Downlight only) 70%/30% 60%/40% 50%/50% 0%/100% (Uplight only)								
							W White	Blank
							S Silver	/MVS
							B Black	/PIR
								/LCBS
								/LCBS/MVS
							/E <sup>1</sup>	
							/MVS/E <sup>1</sup>	
							/PIR/E <sup>1</sup>	
							/LCBS/E <sup>1</sup>	
							/LCBS/MVS/E <sup>1</sup>	
								No Option
								Microwave Occ Sensor
								Passive Infrared Occ Sensor
								Lightcloud® Blue Enabled
								PIR Sensor
								MVS Sensor
								Battery Backup
								Microwave Occ Sensor w/Battery Backup
								Passive Infrared Occ Sensor w/Battery Backup
								Lightcloud® Blue Enabled
								PIR Sensor w/Battery Backup
								Lightcloud® Blue Enabled
								MVS Sensor w/Battery Backup

Product Family	Size (Wattages)	Mount	Lens	Light Output	Color Temp	Voltage	Finish	Options
BOA		P						
2	2 ft (20/14/12/10/5W)	P	Pendant	Blank	Flat	Blank	Downlight	Blank 3000/3500/4000K Selectable
3	3 ft (30/21/18/15/8W)		L	Louvers				
4	4 ft (40/28/24/20/10W)							
8	8 ft (80/56/48/40/20W)							
							W White	Blank
							S Silver	/MVS
							B Black	/PIR
								/LCBS
								/LCBS/MVS
							/E <sup>1</sup>	
							/MVS/E <sup>1</sup>	
							/PIR/E <sup>1</sup>	
							/LCBS/E <sup>1</sup>	
							/LCBS/MVS/E <sup>1</sup>	
								No Option
								Microwave Occ Sensor
								Passive Infrared Occ Sensor
								Lightcloud® Blue Enabled
								PIR Sensor
								MVS Sensor
								Battery Backup
								Microwave Occ Sensor w/Battery Backup
								Passive Infrared Occ Sensor w/Battery Backup
								Lightcloud® Blue Enabled
								PIR Sensor w/Battery Backup
								Lightcloud® Blue Enabled
								MVS Sensor w/Battery Backup

Product Family	Size (Wattages)	Mount	Lens	Light Output	Color Temp	Voltage	Finish	Options
BOA		R						
2	2 ft (20/14/12/10/5W)	R	Recessed	Blank	Flat	Blank	Downlight	Blank 3000/3500/4000K Selectable
3	3 ft (30/21/18/15/8W)		L	Louvers				
4	4 ft (40/28/24/20/10W)							
8	8 ft (80/56/48/40/20W)							
							Blank	White
							/MVS	
							/PIR	
							/LCBS	
								/LCBS/MVS
							/E <sup>1</sup>	
							/MVS/E <sup>1</sup>	
							/PIR/E <sup>1</sup>	
							/LCBS/E <sup>1</sup>	
								No Option
								Microwave Occ Sensor
								Passive Infrared Occ Sensor
								Lightcloud® Blue Enabled
								PIR Sensor
								MVS Sensor
								Battery Backup
								Microwave Occ Sensor w/Battery Backup
								Passive Infrared Occ Sensor w/Battery Backup
								Lightcloud® Blue Enabled

<sup>1</sup>Only available on 4 ft and 8 ft models