




WFRL

An edge-lit wafer for every need.


WFRL now available with black trim!

RAB

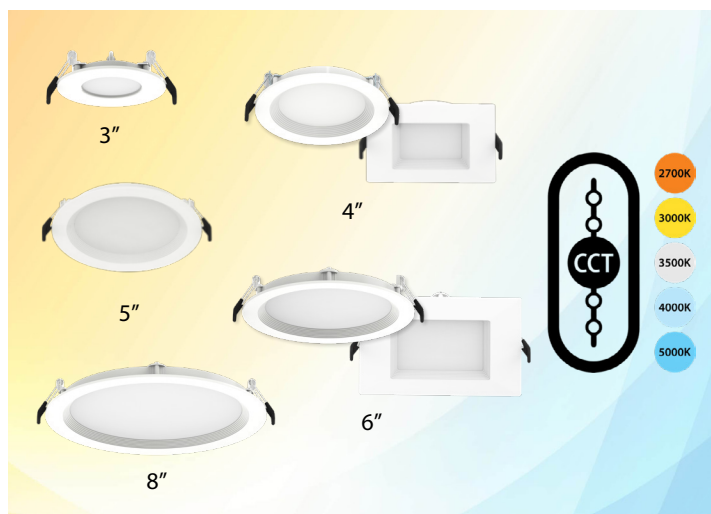

More options at your fingertips.

Designed for maximum flexibility, the WFRL family lets you change color temperature with the flick of a switch! Available in 3", 4", 5", 6" and 8" models, they're ideal for new construction and remodel applications.

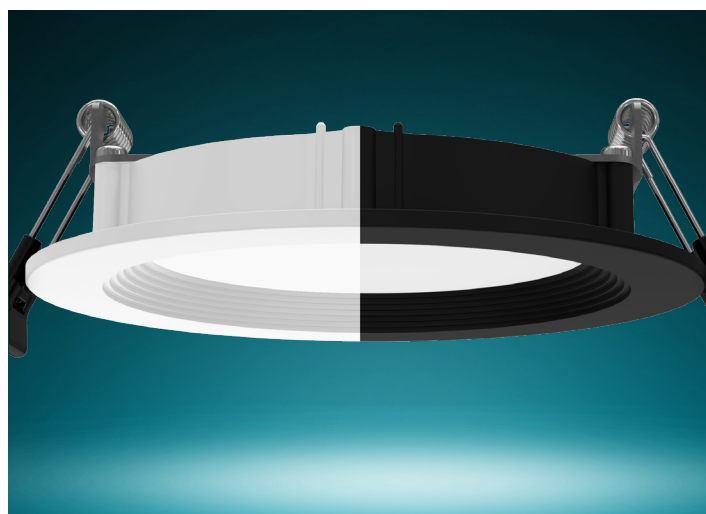


Traditional or contemporary.

Wafers are available in black or white trims, giving you the flexibility to choose between the seamless, understated look that blends well with standard ceiling colors, or the modern, dramatic look often used in contemporary or industrial-style spaces.



Anywhere you want it.

Rated for use in dry, damp, and wet locations, the WFRL is perfect for any application you throw at it, whether indoor or outdoor.

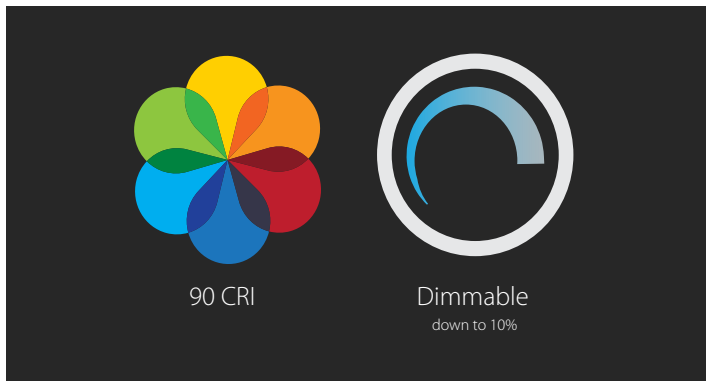

Economy that performs.

All wafers are dimmable—with most common TRIAC/ELV (120V) and 0-10V (120-277V) dimmers*. All models are Title 24 compliant. 90 CRI provides accurate color rendering, making them ideal for commercial applications where color is critical.

*See Dimmer Compatibility List included in the family spec sheet.



CCT-ADJUSTABLE WFRL
FEATURE PAGE




5-YEAR,
NO-COMPROMISE
WARRANTY

RAB's Warranty is
subject to all terms
and conditions found at
rablighting.com/warranty

Thoughtful design.


- A Edge-lit technology minimizes fixture depth
- B Spring-loaded retention clips
- C Frosted, diffusion lens for smooth output
- D Smooth or baffle trim
- E Gasketed to be airtight
- F IC-rated for direct contact with insulation
- G Remote driver eliminates need for a can
- H CCT select switches integrated in driver box
- I FT5 Plenum rated cable (per UL2043)

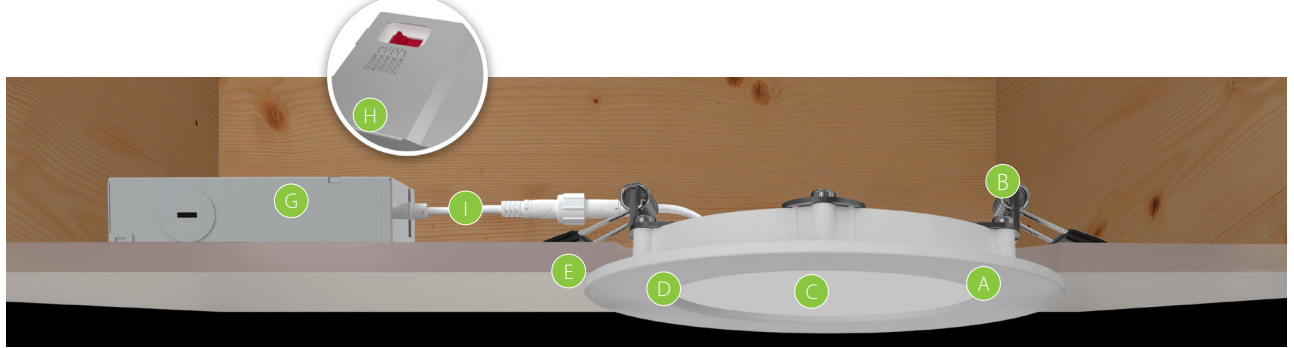

Accessories.



[Color Trims](#)




[Goof Rings](#)



[Mounting Plates](#)



[Universal Driver](#)



[Emergency Driver](#)

Ordering Matrix

Product Family	Size	Shape	Wattage	CRI/Color Temp	Driver	Finish	Trim	Trim Depth
3 INCH								
WFRL	3	R	6	9CCT	120	W		
	3 3"	R Round	6 6W	9CCT 90CRI; 2700/3000/3500/4000/5000K	120 120V	W White	B Baffle S Smooth	
4 INCH								
WFRL	4			9FA	120			
	4 4"	R Round* S Square**	9 9W 10.5 10.5W	9FA 90CRI; 2700/3000/3500/4000/5000K	120 120V	W White B Black	B Baffle S Smooth	Blank Standard S Shallow*
5 INCH								
WFRL	5	R	12	9CCT	120	W		
	5 5"	R Round	12 12W	9CCT 90CRI; 2700/3000/3500/4000/5000K	120 120V	W White	B Baffle S Smooth	
6 INCH								
WFRL	6			9FA				
	6 6"	R Round S Square***	13 13W 14 14W**	9FA 90CRI; 2700/3000/3500/4000/5000K	120 120V D 120-277V	W White B Black	B Baffle S Smooth	Blank Standard S Shallow*
8 INCH								
WFRL	8	R	23	9FA		W		
	8 8"	R Round	23 23W	9FA 90CRI; 2700/3000/3500/4000/5000K	120 120V D 120-277V	W White	B Baffle S Smooth	

*Only available in 9W with round baffle trim.

**Only available in 9W

*Only available in 13W with round, baffle trim

**Only available in 120V

***Only available in 13W in 120V