RAB

CDX

FIELD ADJ.

ADJUSTABLE OPTICS

Premium design, dialed in by hand.

The CDX cylinder with adjustable optics.

Adjust everything on site.

With various selectable beam angles, the CDX provides customizable, smooth light distribution. The integral optical adjustment rings allow for easy tuning with a simple twist, giving you independent control over the top and bottom light.*

**Wall and pendant mount models only*



A solution for every space.

CDX is available in three sizes with beam angles to match, and each size also boasts field-adjustable wattage and CCT for a powerhouse of customization. Wall, surface, or pendant cord mounting options cover your entire job site.



CDX
FEATURE PAGE

100,000 HRS
100,000-HOUR
LED LIFESPAN

120-277V

0-10V

TRIAC

CAN BE USED TO COMPLY WITH TITLE 24 PART 6 JA8 HIGH EFFICACY LED LIGHT SOURCE REQUIREMENTS

5 YEAR LIMITED WARRANTY

RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty

Premium, inside and out.

Designed with an inner ring that's color-matched to the housing for a seamless aperture, CDX is offered in 4 matte finishes. The pendant model hangs on a color-matched cord that's adjustable up to 48" with the ceiling canopy included.

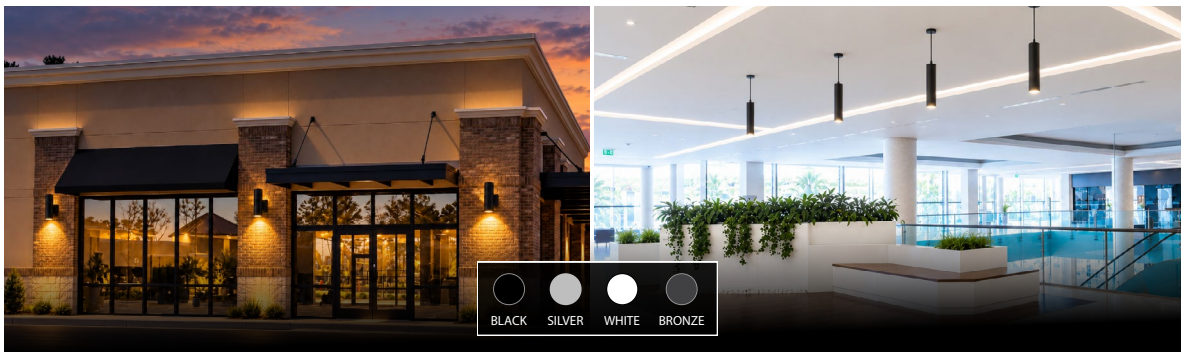

One driver does it all.

A single driver can run either 120V (with TRIAC dimming) or 120-277V (with universal dimming) so the same fixture drops into more of your jobs and trims your stock.

When color matters.

When your project calls for accurate color rendering, CDX delivers. Finishes, artwork, and merchandise look the way they're meant to, which makes it a strong fit for retail, hospitality, and gallery spaces.

90+ CRI

Ordering Matrix

Surface Mount

Product Family	Size/Wattage	Mounting	Light Output	Color Temp.	Finish	Driver
CDX						
	S 11/7/5/3/2W	**Blank** Surface Mount	**Blank** Down Only	**Blank** CCT Adjustable	**Blank** Matte Bronze	**Blank** 120-277V
	M 15/9/7/4/2W				**W** Matte White	
	L 30/18/13/8/4W				**B** Matte Black	
					S Matte Silver	

Pendant Mount

Product Family	Size/Wattage*	Mounting	Light Output**	Color Temp.	Finish	Driver
CDX		P				
	S 13/11/7W	**P** Pendant Mount	**Blank** Selectable Down/Up/Both	**Blank** CCT Adjustable	**Blank** Matte Bronze	**Blank** 120-277V
	M 17/15/9W				**W** Matte White	
	L 33/30/18W				**B** Matte Black	
					S Matte Silver	

**Lower wattages are available for uplight-only or downlight-only operation. Uplight and downlight together run at the highest wattage only.*
***Selectable optics apply to the downlight only. The uplight has a fixed beam angle.*

Wall Mount

Product Family	Size/Wattage*	Mounting	Light Output**	Color Temp.	Finish	Driver
CDX		WM				
	S 13/11/7W	**WM** Wall Mount	**Blank** Selectable Down/Up/Both	**Blank** CCT Adjustable	**Blank** Matte Bronze	**Blank** 120-277V
	M 17/15/9W				**W** Matte White	
	L 33/30/18W				**B** Matte Black	
					S Matte Silver	

**Lower wattages are available for uplight-only or downlight-only operation. Uplight and downlight together run at the highest wattage only.*
***Optics are selectable on both the uplight and downlight, independently.*