



An edge-lit wafer for every need. The broadest field-adjustable wafer family out there.

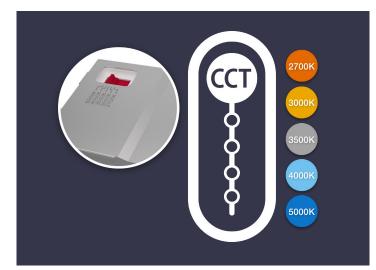


Five color temperatures to choose from.

These wafers all have field-selectable CCT, making changes as easy as the flick of a switch.

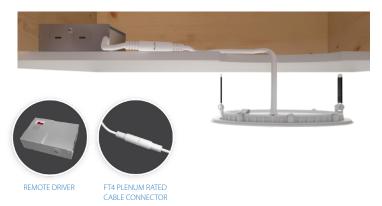

Remote driver.

Installations are super flexible with an off-board driver that minimizes installation height and eliminates the need for a traditional recessed housing.

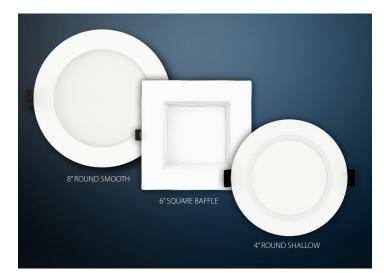

Countless design options.

This incredibly versatile line has an option for every need. Wafers are available in 3, 4, 5, 6, and 8" models with either smooth or baffle trims. Square models are also offered, and for a completely flush look, there are shallow wafers.



Economy that performs.

All wafers are dimmable—with most common TRIAC/ELV (120V) and 0-10V (120-277V) dimmers*. All models are Title 20 & Title 24 compliant. 90 CRI provides accurate color rendering, making them ideal for commercial applications where color is critical. *See Dimmer Compatibility List















5-YEAR, NO-COMPROMISE WARRANTY

RAB's Warranty is subject to all terms and conditions found at rablighting.com/warranty

Also available...



Ordering Matrix

Family	Siz	e	Shape	Wa	attage		CRI/Color Temp	Vo	ltage		Finis	h		Trim	Trin	n Depth
3 INCH																
WFRL	3		R		6		9CCT		120		W					
	3	3"	R Round	6	6W	9CCT	90CRI, 5000K/4000K/3500K/3000K/2700K Field Adjustable	120	120V	w		White	B S	Baffle Smooth		
4 INCH																
WFRL	4						9FA		120		W					
	4		R Round* S Square**		9W 10.5W	9FA	90CRI, 5000K/4000K/3500K/3000K/2700K Field Adjustable	120	120V	w		White	B S	Baffle Smooth		Standard Shallow*
WFRL	5 5	5"	R R Round	12	12 12W	9ССТ	90CRI, 5000K/4000K/3500K/3000K/2700K Field Adjustable		120 120V	w	W	White	B S	Baffle Smooth		
		5"		12		9CCT	90CRI, 5000K/4000K/3500K/3000K/2700K		-	W		White	_			
		5"		12		9CCT	90CRI, 5000K/4000K/3500K/3000K/2700K		-	w		White	_			
6 INCH	5	6"		13		9FA	90CRI, 5000K/4000K/3500K/3000K/2700K Field Adjustable	120	120V		W	White	S			Standard Shallow*
6 INCH WFRL	5 6 6 in 13W le in 120	6" with n	R Round R Round S Square***	13	12W	9FA	90CRI, 5000K/4000K/3500K/3000K/2700K Field Adjustable 9FA 90CRI, 5000K/4000K/3500K/3000K/2700K	120	120V		W		S	Smooth Baffle		
6 INCH WFRL Only available * Only availab **Only availab	5 6 6 in 13W le in 120	6" with n	R Round R Round S Square***	13	12W	9FA	90CRI, 5000K/4000K/3500K/3000K/2700K Field Adjustable 9FA 90CRI, 5000K/4000K/3500K/3000K/2700K	120	120V		W		S	Smooth Baffle		
6 INCH WFRL	5 6 6 in 13W le in 120	6" with n	R Round R Round S Square***	13	12W	9FA	90CRI, 5000K/4000K/3500K/3000K/2700K Field Adjustable 9FA 90CRI, 5000K/4000K/3500K/3000K/2700K	120	120V		W		S	Smooth Baffle		