RAB

GOOSENECK

Timeless gooseneck style, on-site control.

The field-adjustable LGOOSE.

FIELD ADJ.

ON/OFF PHOTOCELL

Dial it in on site.

Skip the guesswork at spec time. Set wattage and color temperature right at the fixture, so a single product covers a range of jobs and last-minute changes never mean a reorder.

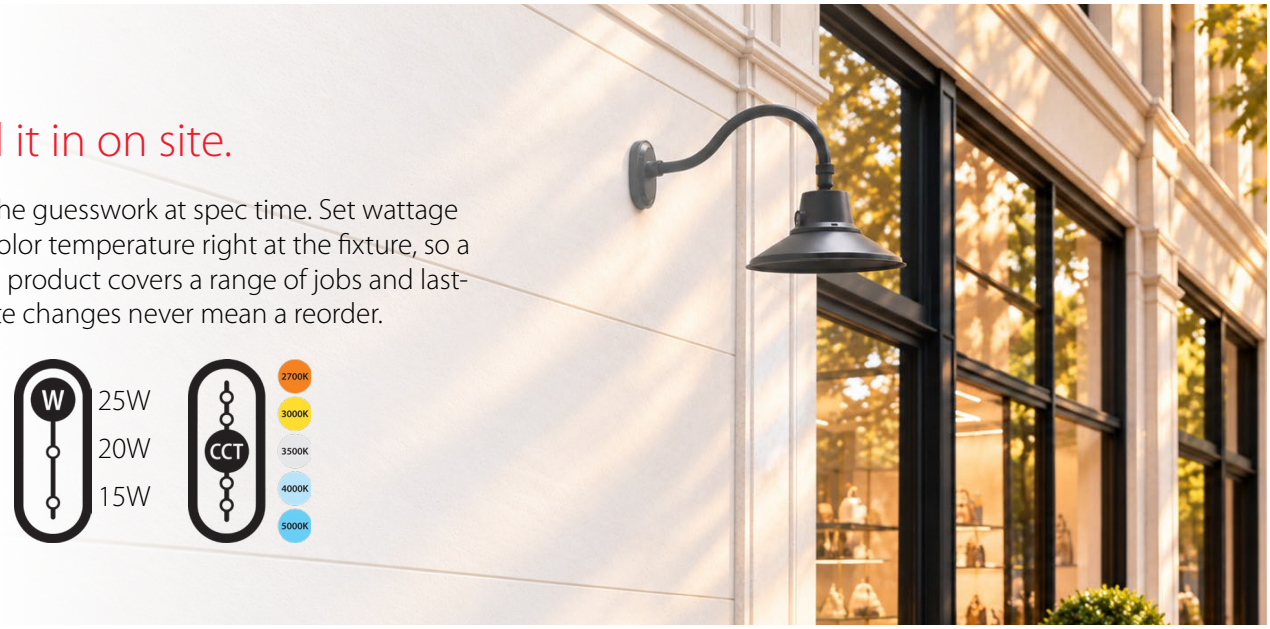

GOOSENECK FEATURE PAGE

100,000 HRS

100,000-HOUR LED LIFESPAN

120-277V

0-10V

65 IP RATING

DLC LISTED

DLC LISTED PREMIUM

5 YEAR LIMITED WARRANTY

RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty

What's your angle?

The head rotates a full 360° and tilts 180° in precise 15° increments. Wash a sign, graze a façade, or light an entry with the same fixture, then lock in the angle that hits the mark.

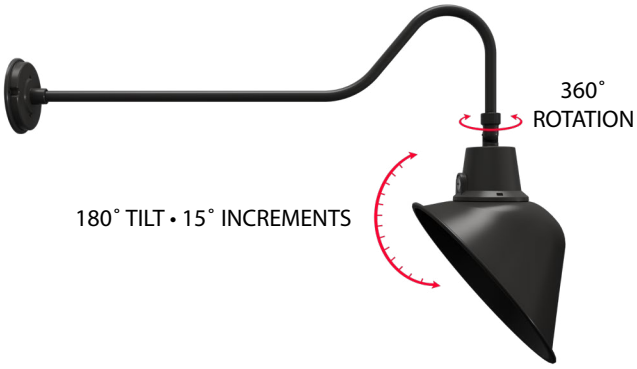

Set it and forget it.

An integrated dusk-to-dawn photocell with an on/off switch means hands-free operation and automatic energy savings, with no separate control to spec.

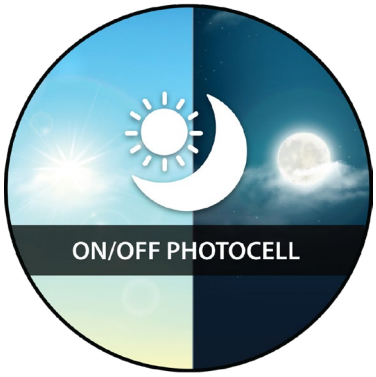

Build the look you want.

LGOOSE is available with a clear or frosted lens. Choose from three shade styles and pair any of them with four arm options to suit the architecture. It's the timeless gooseneck silhouette, configured your way.

CHOOSE YOUR LENS

CHOOSE YOUR SHADE

CHOOSE YOUR ARM

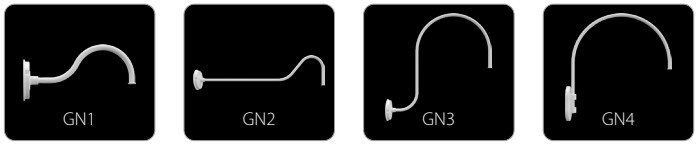

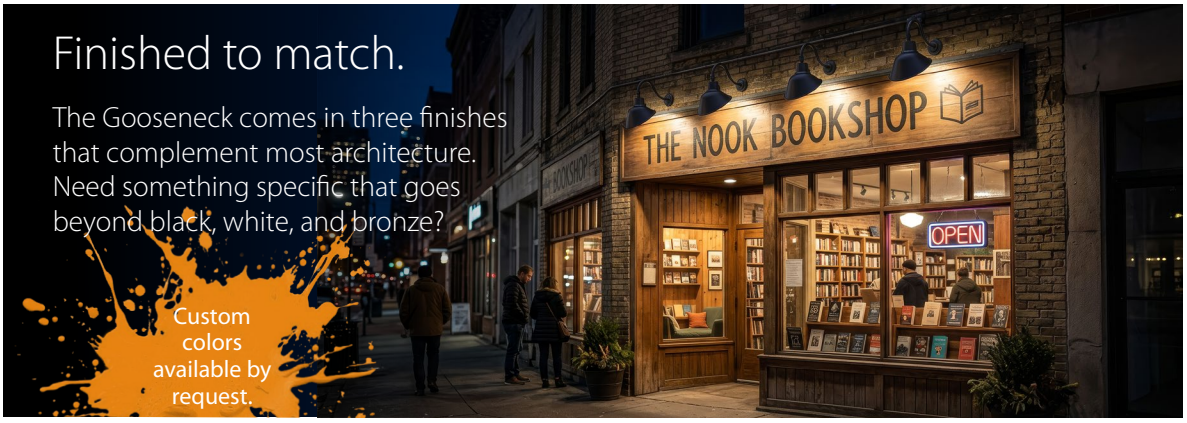

Ordering Matrix

Family	Wattage	Color Temp	Lens	Shade	Finish	Driver	Controls
GN1	**Blank** 25/20/15W	**Blank** CCT Adjustable	**Blank** Clear	**AC** Angled Cone	**Blank** Bronze	**Blank** 120-227V,	**Blank** On/Off
GN2			**F** Frosted	**AD** Angled Dome	**W** White	0-10V Dimming	Photocell
GN3				**ST** Straight Shade	**B** Black		
GN4							

Gooseneck components can also be ordered separately *(necks, heads, shades)*. See website for details.