




Ultra-affordability meets
durability, strength, and safety.

HAZBAYLED high bays.

RAB[®]

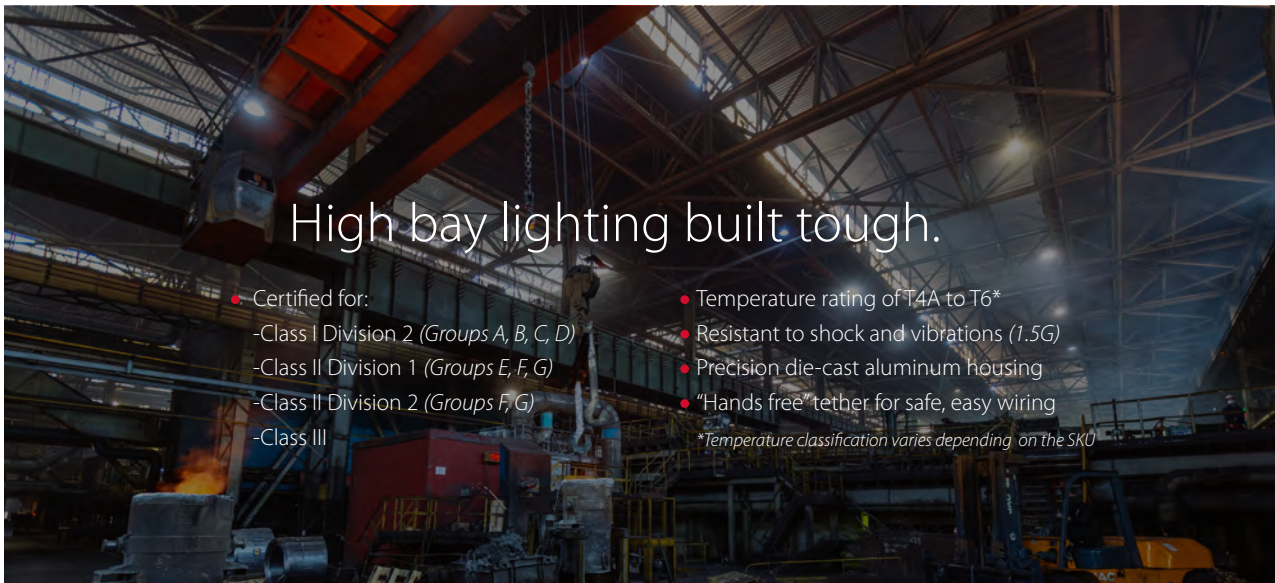

High bay lighting built tough.

- Certified for:
 - Class I Division 2 (Groups A, B, C, D)
 - Class II Division 1 (Groups E, F, G)
 - Class II Division 2 (Groups F, G)
 - Class III
 - Temperature rating of T4A to T6*
 - Resistant to shock and vibrations (1.5G)
 - Precision die-cast aluminum housing
 - "Hands free" tether for safe, easy wiring
- *Temperature classification varies depending on the SKU



IP 66
RATED



LISTED
UL Listed*

*Certified to UL standard 1598 and 844.



100,000 HRS
100K-HOUR
LED LIFESPAN



DLC LISTED



5-YEAR
NO COMPROMISE
WARRANTY


RAB's Warranty is subject to all terms and conditions found at rablighting.com/warranty



Mounting versatility

All HAZBAYLED models come standard with two mounting options: use the yoke for surface mounts or remove it for pendant mounts (*pendant by others*).

Accessories



HAZBAYLED-WG1



HAZBAYLED-WG2

Ordering Matrix

Family	Wattage	Color Temp	Mount	Finish	Lens/Globe	Voltage	Options							
HAZBAY														
	100 150 200 300	100W 150W 200W 300W	Blank	5000K	Blank	Surface/Pendant	Blank	Gray	CF FF	Clear flat lens Frosted flat lens	Blank /480*	120-277V, 0-10V Dimming 480V	Blank /E**	No option Battery Backup

*Not available in the 100W

**Emergency battery backup not available with 480V