

RAB®



Hazardous location floods, now in higher wattages!


HAZFFLED—Class 1 Div 2 lighting.

Built tough.

Designed to perform in areas with hazardous vapor and gases, the HAZFFLED is certified for Class I, Division 2, Groups A, B, C, D and has a temperature rating of T4A or higher, depending on the model.

Ideal for use in:

- Petroleum refineries
- Fuel servicing areas
- Utility gas plants
- Dry cleaning plants
- Aircraft hangars

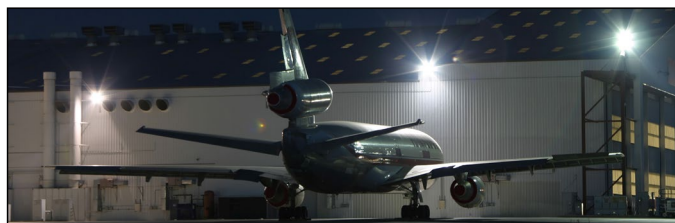



FEATURE PAGE



100,000-HOUR LED
LIFESPAN



AVAILABLE FOR
150W MODEL



IP66



NO-COMPROMISE
WARRANTY

5-YEAR,
NO-COMPROMISE
WARRANTY

RAB's warranty is
subject to all terms
and conditions found at
rablighting.com/warranty

Various wattages keep your options open.

The HAZFFLED is available in seven wattages—everything from 30W to 400W—for use in countless applications on a single site, and its wide beam spread is versatile enough for multi-purpose use. 5000K color temperature maximizes visibility to promote a safer environment.




Accessories.


Wire Guards




HAZFF-S-WG



HAZFF-M-WG



HAZFF-L-WG



HAZFF-XL-WG

Hoods



HAZFF-S-H




HAZFF-M-H



HAZFF-L-H



HAZFF-XL-H



Adjustable Arm
HAZFF-ADJ-ARM*
*For all model sizes.

Ordering Matrix

Product Family	Wattage		Mount		Color Temp	NEMA Type		Finish		Driver	
HAZFFLED											
	30	30W	Blank SF	Yoke Slipfitter	Blank	5000K	Blank Blank	7H X 6V 6H X 6V*	Blank Gray	Blank /480	0-10V Dimming, 120-277V 0-10V Dimming, 480V**
	60	60W									
	100	100W									
	150	150W									
	200	200W									
	300	300W									
	400	400W									

*NEMA Type 6Hx6V available only on 300 and 400W.

**480V available only for 100, 150, 200, 300 and 400W.