



HAZARDOUS
LOCATION



CLASS I
DIV 2

RAB[®]



Floodlight solutions for hazardous environments.


HAZFFLED—Class I, Div 2 lighting.

Built tough.

Designed to perform in areas with hazardous vapor and gases, the HAZFFLED is certified for Class I, Division 2, Groups A, B, C, D and has a temperature rating of T4A or higher, depending on the model.

Ideal for use in:

- Petroleum refineries
- Fuel servicing areas
- Utility gas plants
- Dry cleaning plants
- Aircraft hangars

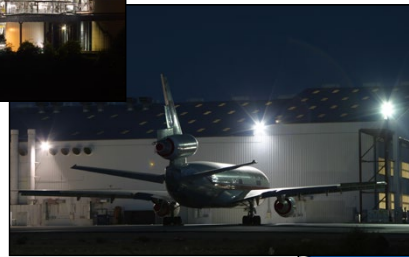



100,000-HOUR LED LIFESPAN



AVAILABLE FOR 150W MODEL



IP66



5-YEAR, NO-COMPROMISE WARRANTY

RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty

Various wattages keep your options open.

The HAZFFLED is available in five wattages—everything from 30W to 200W—for use in countless applications on a single site, and its wide, 7H x 6V NEMA spread is versatile enough for multi-purpose use. 5000K color temperature maximizes visibility to promote a safer environment.




30W & 60W

100W & 150W

200W

Accessories.

Wire Guards

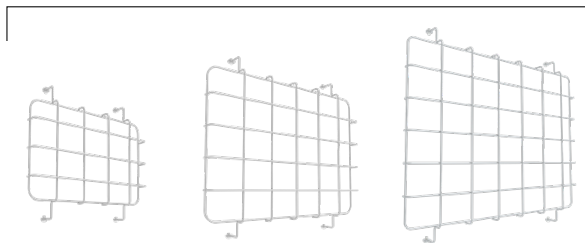


HAZFF-S-WG

HAZFF-M-WG

HAZFF-L-WG


Hoods

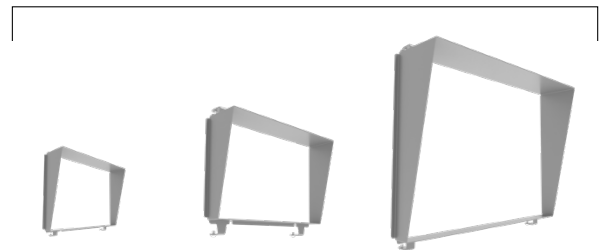

HAZFF-S-H

HAZFF-M-H

HAZFF-L-H



Adjustable Arm
HAZFF-ADJ-ARM*
*For all model sizes.

Ordering Matrix

Product Family	Wattage	Mount	Color Temp	NEMA Type	Finish	Voltage
HAZFFLED	30 60 100 150 200	Blank SF Yoke Slipfitter	Blank 5000K	Blank 7Hx6V	Blank Gray	Blank /480 120-277V, 0-10V Dimming 480V, 0-10V Dimming*

*480V available only for 150W