




RAB[®]

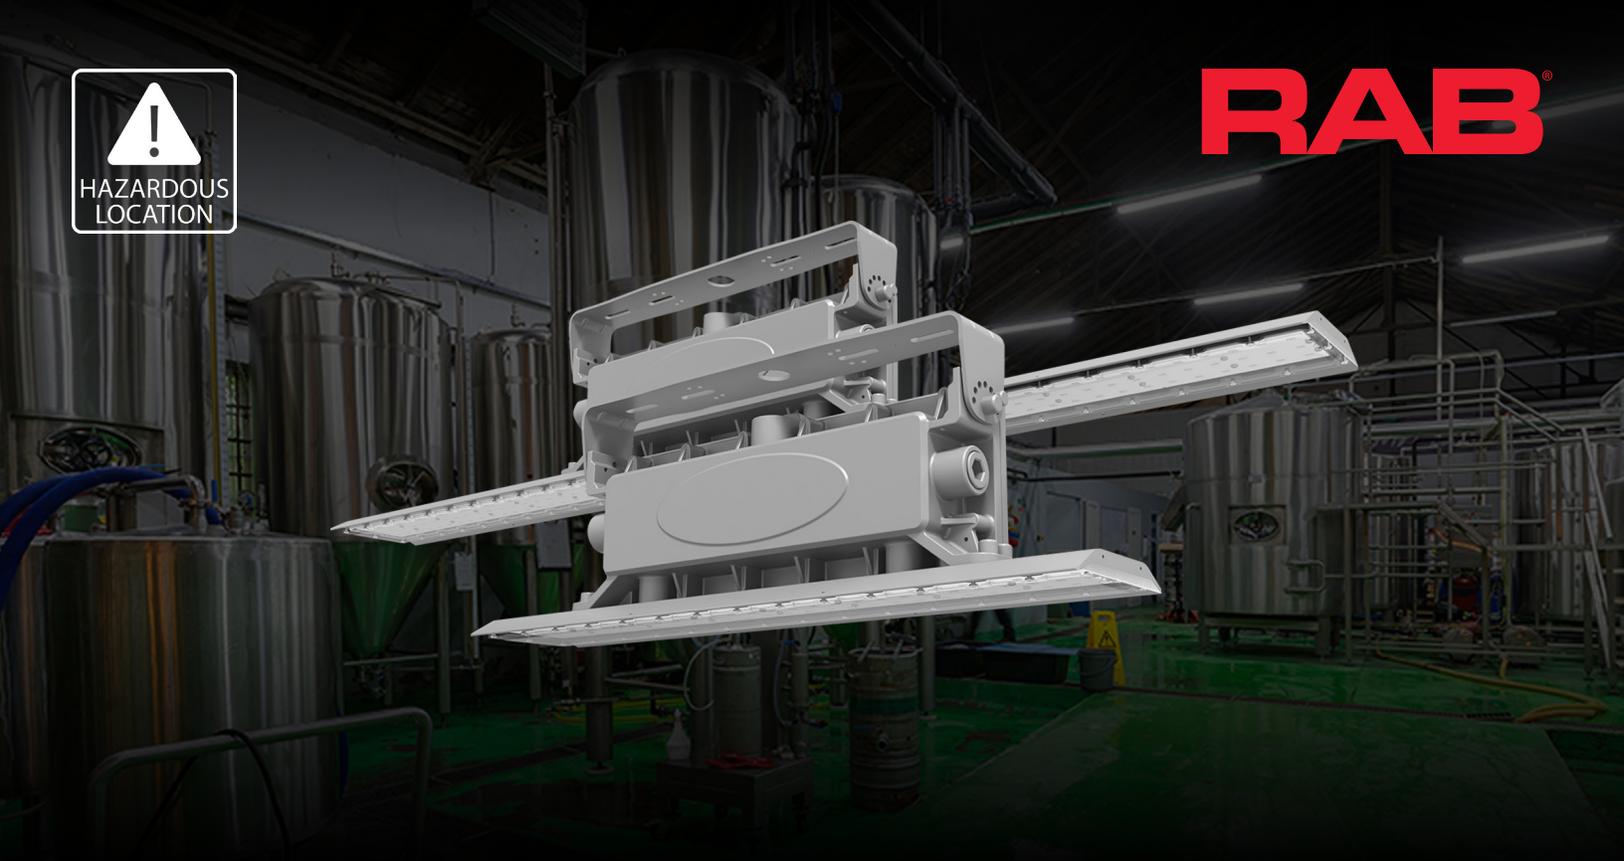


High bay solutions for tough environments. HAZL34—now in more models!

Built tough.

Designed to perform in areas with hazardous vapor and gases, the HAZL34 is certified for Class I, Division 2, Groups A, B, C, D and has a temperature rating of T4A.

**80W/480V and 120W/480V models have a T5 rating.*

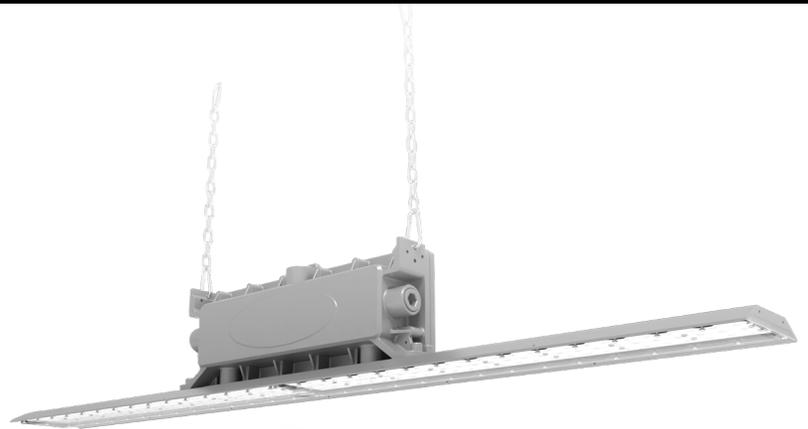



FEATURE PAGE



100,000 HOUR LED LIFESPAN



CERTIFIED

CERTIFIED TO UL STANDARD 1598 AND 844




5-YEAR, NO-COMPROMISE WARRANTY

RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty

For high bay applications.

The HAZL34 is offered in 2' (40W) and 4' (80W, 120W, or 200W) models in a bright 5000K for maximized visibility.



40W

5000K



80W, 120W, or 200W

Secure installations.


All models come standard with three mounting options—pendant mount (pendant by others), chain mount, and a yoke bracket for surface mount. A separate kit is available for ceiling mount.

INCLUDED



PENDANT MOUNT

INCLUDED



CHAIN MOUNT

INCLUDED




YOKE BRACKET FOR SURFACE MOUNT




CEILING MOUNT KIT
HAZL34-CM-KIT

Wire guard accessories.

For an added level of protection, wire guards are available for both HAZL34 sizes.



HAZL34-WG2

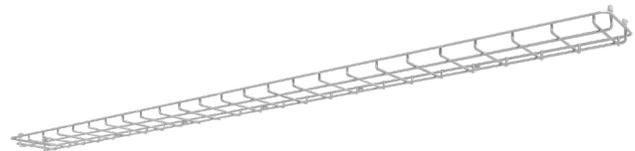

HAZL34-WG4

Ordering Matrix

| Product Family | Wattage (Size) | Color Temp | Finish | Voltage |
|----------------|--|------------|--------|---|
| HAZL34 | 40 80 120 200 | Blank | Blank | Blank /480 |
| | 40W (2 ft.) 80W (4 ft.) 120W (4 ft.) 200W (4 ft.) | 5000K | Gray | 120-277V, 0-10V dimming 480V, 0-10V dimming* |

*For 80W, 120W and 200W.