

RAB®

OTTER



Washdown-rated and slim enough to disappear. The OTTER is priced to move.


Serious performance, budget-friendly price.

Sometimes you just need a dependable washdown that gets the work done without breaking the budget. The OTTER delivers exactly that: real performance at a price point that makes sense for the project.



Slim where it counts.

OTTER is narrower than most washdown fixtures on the market — almost strip-light thin. Clean, unobtrusive, and built for tight spaces or any application where a lower profile matters.

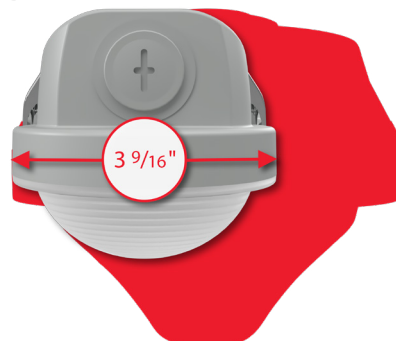



FEATURE PAGE



100,000-HOUR
LED LIFESPAN



120-277V



0-10V



BAT. BACKUP



IP RATING




NEMA 4
ENCLOSURE
RATING



5-YEAR
LIMITED
WARRANTY

5-YEAR
LIMITED
WARRANTY

RAB's warranty is
subject to all terms
and conditions found at
rablighting.com/warranty



Three sizes, nine options.

Available in 2', 4', and 8' configurations with selectable wattage and CCT, so you can dial in the OTTER's light output on site without stocking a dozen different SKUs.



Ready to mount, your way.

OTTER comes standard with surface-mount brackets and V-hooks for chain mounting, giving you flexibility right out of the box. Accessories are available for 45° angles and junction boxes so they can go anywhere you need them to.



ANGLED MOUNTS

J-BOX MOUNTS

Smart controls available.

Add an internal microwave sensor (MVS), passive infrared sensor (PIR), or go wireless with Lightcloud Blue-enabled sensors for use with our flexible lighting control system.



MVS SENSOR



PIR SENSOR



Lightcloud



LCBS/MVS



PIR



LCBS

Built to withstand the elements.

- IP66 and NEMA 4X rated to protect against moisture and dust
- IK10 impact rating
- UL 746C F1 weatherability rating for UV resistance, water exposure, and extreme temperature conditions



NEMA 4
ENCLOSURE
RATING



IP RATING



IK10 RATING



UL
CERTIFIED

Emergency backup, just in case.

All sizes of the OTTER are available with a battery backup for applications where you can't afford a single, dark moment.



Ordering Matrix

Product Family	Size/Wattage	Mounting	Finish	Driver	Controls	Battery Backup
OTTER						
	2 2 ft, 25/20/15W	Blank	Surface Mount, Metal Bracket with Hooks	Blank	Blank /MVS /PIR /LCBS /LCBS/MVS	Blank /E
	4 4 ft, 50/40/30W		Blank Gray		None Internal Microwave Sensor Passive Infrared Sensor Lightcloud Blue w/PIR Sensor Internal Lightcloud Blue w/MVS Sensor	None Battery Backup
	8 8 ft, 90/75/60W			Blank 120-277V, 0-10V Dimming		