

RAB®

T34 FA



90 CRI



TUNABLE
WHITE



SMARTSHIFT




contractorplus

The panel your tight budget deserves.

T34—now with 5 selectable CCTs and 90 CRI options!

We've brought
circadian lighting to our
ultra-economy panels!

The T34 FA is available in three formats, all with tunable CCT and SmartShift capability. Once installed alongside a Lightcloud Blue control system, it can automatically tune the CCT and intensity of your lights throughout the day, syncing with the natural cycles of daylight.

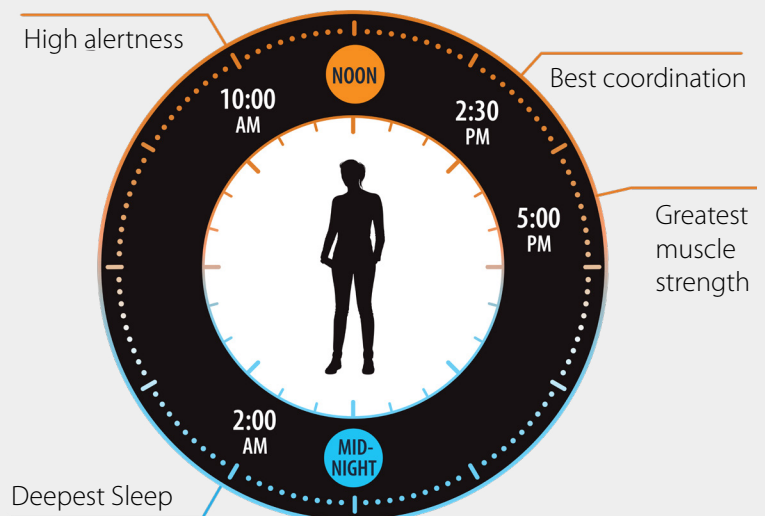

Take energy savings to the next level.

The T34 FA is also available in high-efficacy models for additional cost savings. With efficacies of up to 160 lm/W, the T34 FAHE exceeds DLC Premium requirements for LED panels.



Tight spaces? No problem.

The T34 FA's low-profile design is IC rated for direct contact with ceiling insulation. Integral earthquake clips secure the panel to T-bars and won't get lost during installation.




When color accuracy matters.

In an operating room or a retail display, color matters. 90 CRI models render skin tones, finishes, and merchandise accurately — all with the same budget-conscious pricing as the rest of the family.



Maximized energy savings.

The T34 is available with an integrated, LCB-enabled microwave or passive infrared occupancy sensor, both of which also include closed-loop daylight harvesting. Models with either of these sensors can serve as Luminaire Level Lighting Controls (LLLC), qualifying the T34 for more significant utility rebates.

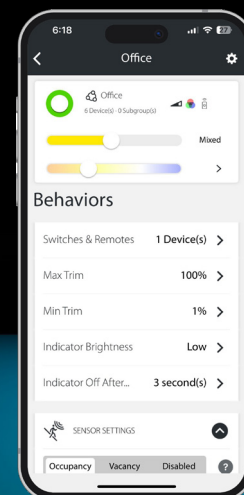



FEATURE PAGE



100,000-HOUR
LED LIFESPAN



5-YEAR
LIMITED
WARRANTY

RAB's warranty is
subject to all terms
and conditions found at
rablighting.com/warranty

Versatile mounting.

The T34 FA and FAHE are designed for use in recessed ceilings but can also be mounted directly to drywall with one of our surface mounting kits.



SMKPANEL2X2



SMKPANEL2X4



SMKPANEL1X4

Surface Mounting Kits



RMKPANEL2X2



RMKPANEL2X4



RMKPANEL1X4

Recessed Mounting Kits

Seeing is believing.

A lightweight, frosted, polystyrene lens diffuses light, making the T34 FA and T34 FAHE ideal for areas that require uniform, glare-free distribution.



Ordering Matrices

T34FA

Product Family	Size/Wattage	CRI/Color Temp	Finish	Driver	Controls	Battery Backup				
T34FA										
	2X2 1X4 2X4	2'X2'; 40/35/30/25/20W 1'X4'; 40/35/30/25/20W 2'X4'; 50/45/40/35/30W	Blank HC	80 CRI, CCT Adjustable 90 CRI, CCT Adjustable	Blank White Blank	Blank 120-277V, 0-10V Dimming	Blank /MVS	None Microwave Sensor	Blank /E	None Battery Backup

T34FA w/SmartShift

Product Family	Size/Wattage	Color Temp	Finish	Driver	Controls	Battery Backup
T34FA						
	2X2 1X4 2X4	2'X2'; 40W 1'X4'; 40W 2'X4'; 50W	Blank Tunable White	Blank White	Blank 120-277V /LCB Lightcloud Blue /LCBS Lightcloud Blue PIR Sensor /LCBS/MVS Lightcloud Blue MVS Sensor	Blank None /E Battery Backup

T34FA High Efficacy

Product Family	Size/Wattage	Color Temp	Finish	Driver	Controls	Battery Backup
T34FAHE	2X2 2X4 2'X2'; 30/23/17W 2'X4'; 30/23/17W	Blank CCT Adjustable	Blank White	Blank 120-277V, 0-10V Dimming	Blank /LC /LCB None Lightcloud Blue	Blank /E None Battery Backup