


# How stunning decorative effects come to life.

Transform all your spaces with flexible light.




ARCTAPE

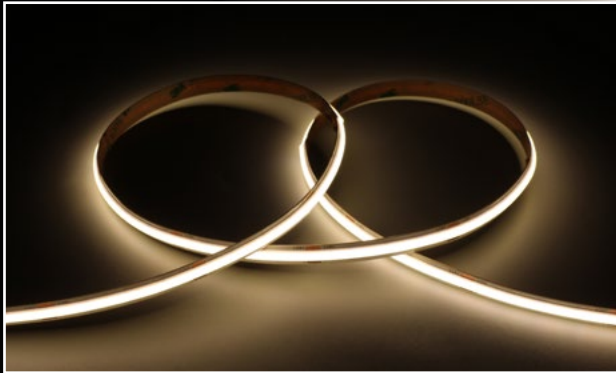

FLEXTAPE




NEOFLEX

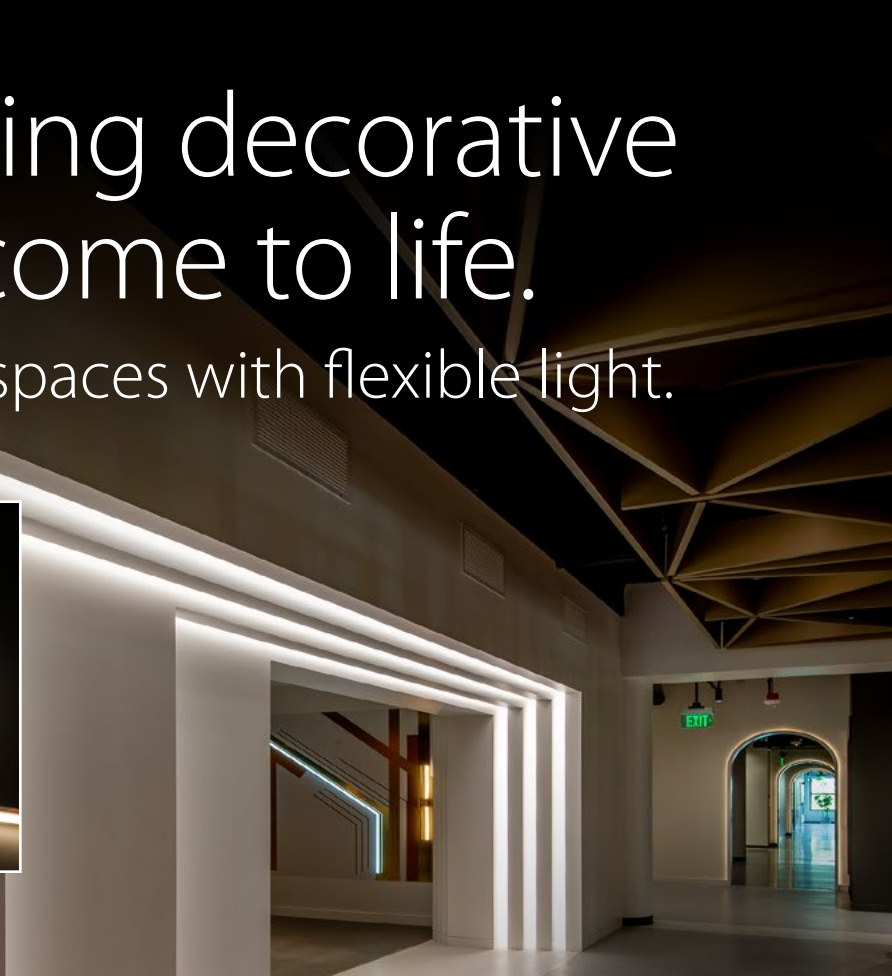


**RAB**



FEATURE PAGE



RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty)

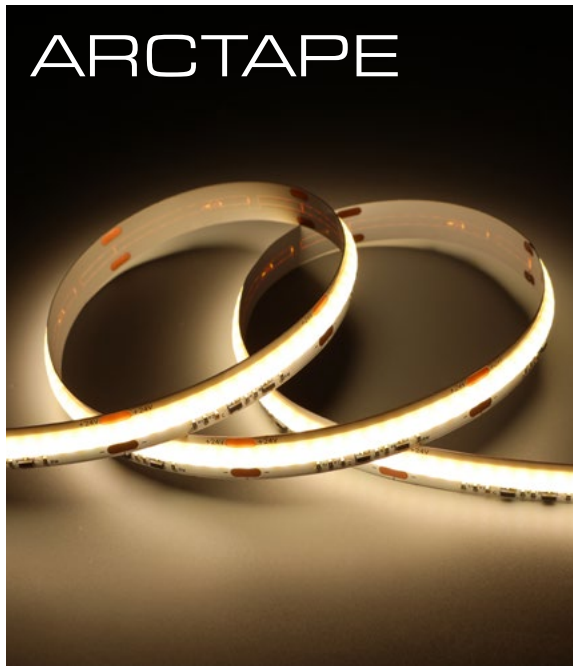

## Smooth, diffused light.

Available in 2700K, 3000K, 4000K, and dim-to-warm (1800–3000K) models, the ARCTAPE emits a continuous band of flawless, non-pixelated light with no hot spots...even if it's installed without a lens. And with an average of over 200lm/ft, it blows away the competition's output.



## Easy, tailored installs.

Because it's cuttable every 2 inches, you can customize the ARCTAPE's length to your exact needs and link your runs with connectors (*sold separately*). All models include 3M® adhesive tape backing so you can just peel, stick, and light! Ideal for indirect lighting in corridors, stairs, coves, handrails, skirtings, etc.

## One complete system.

Various ARCTAPE components are available for easy installs, including drivers, connector kits, and channel+ cover kits, which are ideal for professionally finishing your installation and rendering a softer, more uniform light.



**TAP12**  
Aluminum Channel Kit



**TUJ2**  
2-Pin Connector Kit




**TUJ2/DW**  
2-Pin Connector Kit for Dim-to-Warm

## Ordering Matrix

Product Family	CCT	Option	CRI	Input Voltage	IP Rating	Length
TIC						
N	4000K	Blank	Blank	Blank	Blank	Blank
Y	3000K	/DW	No option	24V DC	IP20	32 ft 9 5/8"
YY	2700K	Dim to Warm (1800-3000K)*	90CRI			
Blank	Tunable					

\*Dim-to-Warm only available with tunable white.



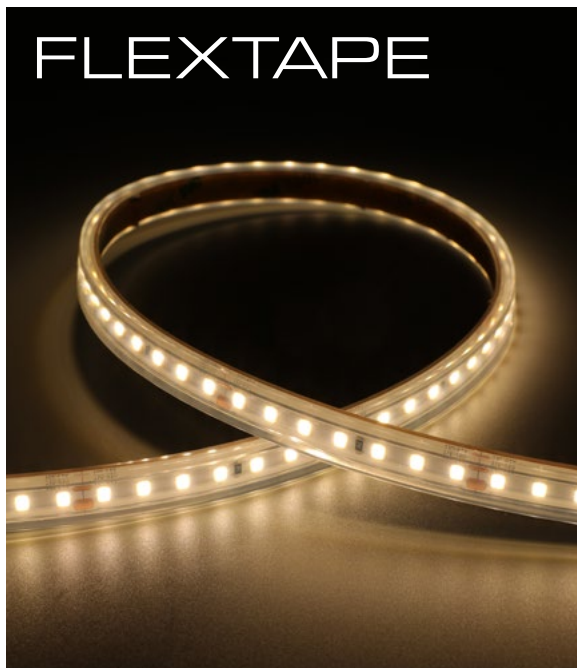

## Waterproof design.

FLEXTAPE is IP67 rated and offers energy-efficient lighting that disappears into architecture while dramatically elevating its design.



FEATURE PAGE



## Easy, tailored installs.

Available in 2700K, 3000K, and 4000K models, our FLEXTAPE is cuttable every 2 3/16 inches so you can customize tape length to your exact needs. All models also include 3M® adhesive tape backing so you can just peel, stick, and light!

## One complete system.

Various FLEXTAPE components are available for easy installs, including drivers, connector kits, power feed kits, channel+cover kits, and mounting clips (*ideal for securing outdoor installs*).



**TAP12**  
Aluminum Channel Kit



**TPF2**  
2-Pin Power Feed Kit



**TOJ2**  
2-Pin Connector Kit



**TSC2**  
2-Pin Silicone Mounting  
Clips (20 per pack)

## Ordering Matrix

Product Family	CCT	CRI	Input Voltage	IP Rating	Length
TOS					
N Y YY	4000K 3000K 2700K	Blank 90CRI	Blank 24V DC	Blank IP67	Blank 32 ft 9 5/8"




RAB's warranty is  
subject to all terms  
and conditions found at  
[rablighting.com/warranty](http://rablighting.com/warranty)



FEATURE PAGE



RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty)

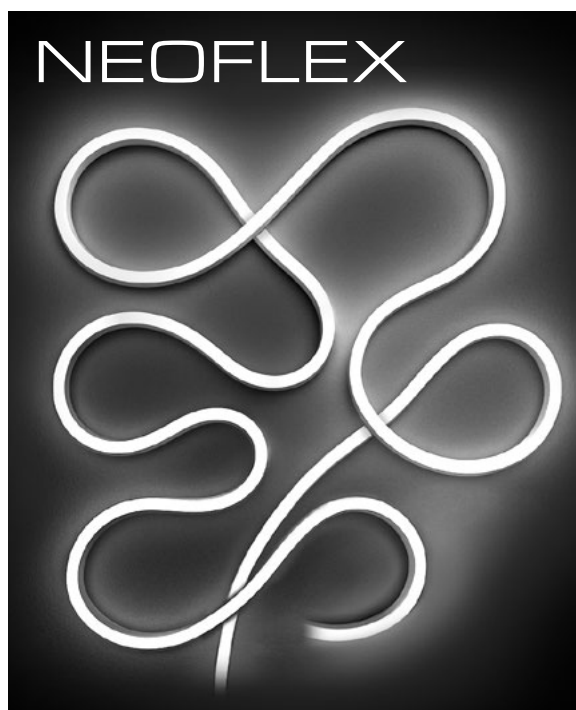


## Watch us flex.

The NEOFLEX can be freely bent in any direction, vertically or horizontally, to create countless shapes and emits a smooth, diffuse 3000K light. Because it's waterproof, it's great for all indoor and outdoor applications. And because it's made with silicone, it is much more resistant to yellowing than PVC products.

## Waterproof design.

This flexible LED tape is IP67 rated and offers energy-efficient lighting that disappears into architecture while dramatically elevating its design.

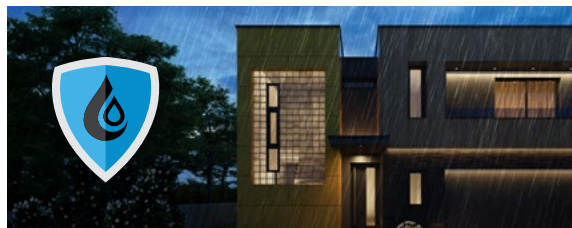

## Cut to any length.

Get as precise as you want, because you can trim the NEOFLEX to exactly any size—it doesn't matter where you cut!

## One complete system.

Configure your NEOFLEX in any form your imagination takes and easily install it with these various components and accessories (endcaps and hardware included).



TB16  
Mounting Bracket



TAP16  
Aluminum Channel Kit



TBB16  
Bendable Mounting Bracket



TPF2NF  
2-Pin Power Feed Kit

## Drivers sold separately.



TID-60  
Indoor Driver



TID-96  
Indoor Driver



TOD-96  
Outdoor Driver

## Ordering Matrix

Product Family	CCT	CRI	Input Voltage	IP Rating	Length
TNF	Y				
Y	3000K	Blank	90CRI	Blank	24V DC
			Blank	IP67	Blank
					16 ft 4 13/16"

## Make it smart.

The Lightcloud Blue XDIM family of dimmers makes it easy to install with any TRIAC/ELV or 0-10V dimmable fixture. Quickly pair to your phone to enjoy wireless control — no hub required. Add the Nano to use voice commands and control your lights from anywhere.

