


Elegance that's affordable.

TOMO linear lighting, now with wall mount options.

A marriage of form and function.

The TOMO was designed to combine the performance of standard wraps with the architectural appeal of high-end linear lighting—all with an affordable price. Available in three lengths, the TOMO provides both field-adjustable wattage and CCT. The sleek TOMO design is ideal for use in schools, offices, or institutions that need a contemporary low-glare look with the added convenience of uplight.

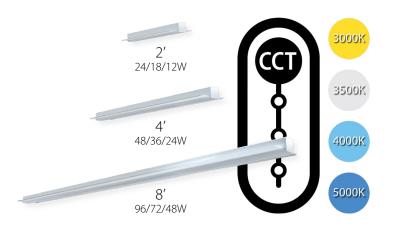

Things are looking up.

TOMO's "wing" lenses boast a dot-matrix pattern that allows the fixture to deliver 30% uplight, much like a conventional wrap. The edge-lit light provides a contemporary look and emits a soft, even glow that reduces glare.











LED LIFESPAN

DIMMING **DOWN TO 5%**



BACKUP (4' AND 8' MODELS



RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty

Lightcloud® Blue enabled.

All models of the TOMO are available with the following integrated options:

- Standard PIR Sensor
- · Lightcloud PIR Sensor
- Lightcloud Blue PIR Sensor
- · Lightcloud Blue MVS Sensor
- Lightcloud Controller
- Battery Backup







We've got connections.

Continuous-run mounting is a breeze with the secure, quick-connect adapter (separate accessory). Just wire the first fixture in the run and connect the rest!



Mounting options.

The TOMO comes standard with two mounting accessories: aircraft cable for secure, suspended mounts and a stainless bracket for easy mounting to junction boxes.



Stainless Bracket

/LCBS/MVS/E

/I CR/F /LCBS/MVS/E



Suspended Mount Two 120" cables included

Lightcloud Blue w/MVS Sensor and Battery Backup

Lightcloud Blue w/Battery Backup* Lightcloud Blue w/PIR Sensor and Battery Backup Lightcloud Blue w/MVS Sensor and Battery Backup

Wall mounting options.

All three TOMO lengths are now also available as a wall mounted fixture.



Ordering Matrix

Longth (Wattages)

Suspended mount

ramily	Lei	ngth (wattages)		Color lemp.	FIL	isn		voitage		Options
томо	-									
	2	2 ft (24/18/12W)	Blank	3000/3500/4000/5000K	Blank	White	Blank	120-277V,	Blank	No Option
	4	4 ft (48/36/24W)		CCT Adjustable				0-10V Dimming	/PIR	Passive Infrared Sensor
	8	8 ft (96/72/48W)							/E	Battery Backup*
									/LC	Lightcloud
									/LCS	Lightcloud Sensor
** " "									/LCB	Lgihtcloud Blue
*Available or	nly for 4	'and 8'							/LCBS	Lightcloud Blue w/PIR Sensor
									/LCBS/MVS	Lightcloud Blue w/MVS Sensor
									/PIR/E	Passive Infrared Sensor w/Battery Backup*
									/LC/E	Lightcloud w/Battery Backup*
									/LCB/E	Lightcloud Blue w/Battery Backup*
									/LCBS/E	Lightcloud Blue w/PIR Sensor and Battery Backup

Voltage

Blank 3000/3500/ 4000/5000k	Blank White	Blank 120-277V, 0-10V Dimming		
4000/5000k	Blank White			No Option
) CCT Adjustable		o tov Dimining	/E /LC /LCS /LCB /LCBS	Passive Infrared Sensor Battery Backup* Lightcloud Lightcloud Sensor Lgihtcloud Blue Lightcloud Blue w/PIR Sensor Lightcloud Blue w/MVS Sensor
				/LCS /LCB