

# RAB®

## XL22



# Adjustable optics with the flip of a switch.

XL22—field selectability has never been easier.

## Four levels of control.

The XL22 family takes versatility to the next level with 4 low-profile housing sizes and field-adjustable switches for wattage, CCT, and beam angle. An integrated photocell with on/off switch provides built-in energy savings and automated control.


### Beam Angles




### Wattage



### Color Temperature



### Integrated Photocell





FEATURE PAGE



100,000 HRS

LED Lifespan



120-277V



0-10V




480V



RAB's warranty is  
subject to all terms  
and conditions found at  
[rablighting.com/warranty](http://rablighting.com/warranty)

## Mounting flexibility.

All models are available in bronze and white finishes and come standard with two complete mounting kits in every box, reducing SKU inventory even more!

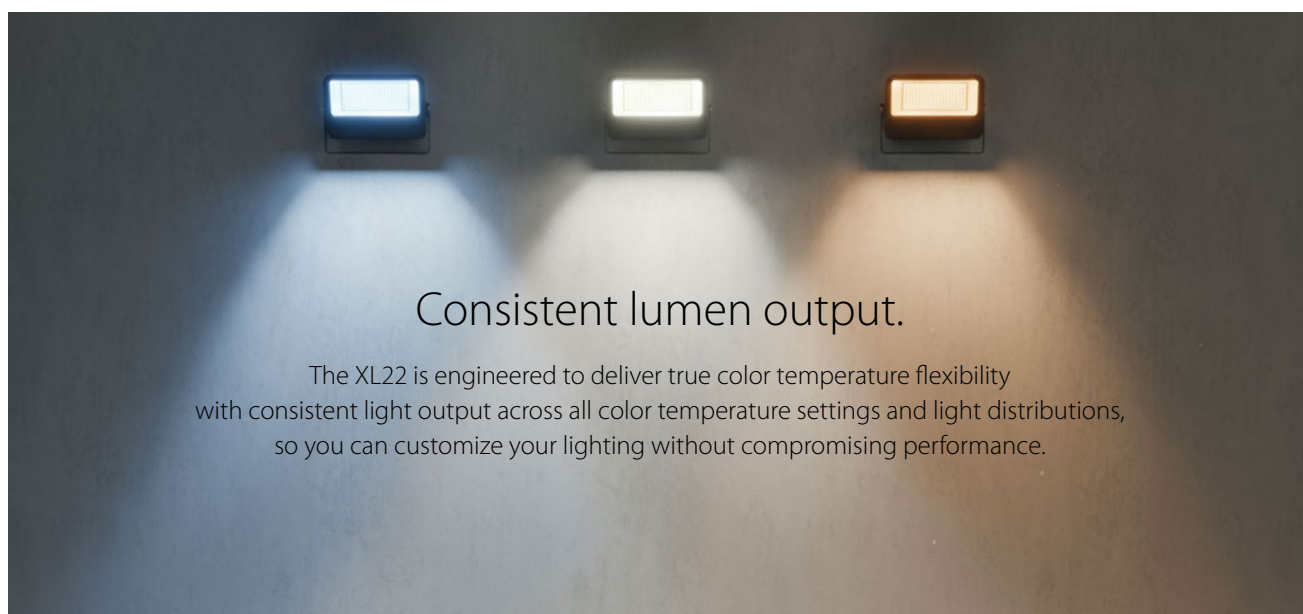

## Consistent lumen output.

The XL22 is engineered to deliver true color temperature flexibility with consistent light output across all color temperature settings and light distributions, so you can customize your lighting without compromising performance.

## Ordering Matrix

Product Family	Wattage	Mounting	Color Temperature	Finish	Optics	Driver	Controls
XL22	35 60 80 150	BLANK Knuckle & Yoke (35W) Knuckle & Trunnion (60 & 80W) Slipfitter & Trunnion (150W)	BLANK 3000/4000/5000K	BLANK W Bronze White	BLANK 55/75/90°	BLANK /480 120-277V 480V *	Blank On/Off Photocell

\*480V only available on 150W