




# Ultra-economy area lighting.

The options you want at the price you need.

Available from 70W through 375W models, and with four IES distributions and numerous control options, the A17 gives you the right light for the right application, all without breaking the budget.

## 7 Lumen Packages

The A17 is available in everything from 10,000 lumens to up to 53,700 lumens, while leading competitors only offer up to 5 lumen packages.

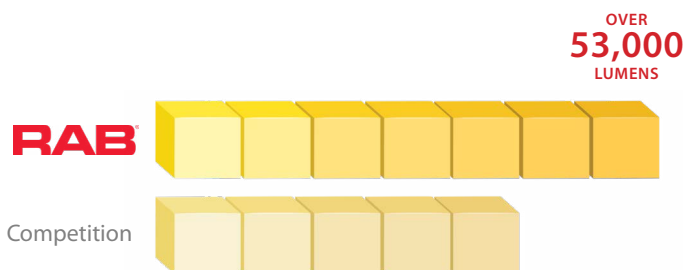

## Consistently High Efficacy

Not only does the A17 offer an ultra-high efficacy of up to 153 lm/W, but it delivers high efficacy throughout its entire portfolio.



## Mounting Flexibility

With several mounting options available, the A17 can be used throughout various areas for one unified look: parking lots, building façades, adjacent walkways, etc.




Comes standard with Universal Pole Mount



Wall Mount  
A17-WM



Slipfitter  
A17-SF-KIT



Adjustable Universal  
Pole Mount  
A17-ADJ-KIT



Roadway Arm  
A17-RW ARM

### OPTIONAL MOUNTING ACCESSORIES



100,000 HOUR  
LED LIFESPAN

**IP65**  
RATING



0-10V  
DIMMING



FIELD  
ADJUSTABLE



5-YEAR, LIMITED  
WARRANTY

RAB's warranty is  
subject to all terms  
and conditions found at  
rablighting.com/warranty

## 3-Way field adjustability

The XFU models of the A17 have three selectable features: 3 selectable wattages, 3 selectable color temperatures, and an on/off twistlock photocell, giving you 18 SKUs in one area light.



## Control Accessories

All A17 models are available with various control options and accessories to help qualify for additional utility rebates.

\* Remote control required for managing settings of the microwave sensor (A17 with MVS sensor only).



Lightcloud  
Twistlock Photocell  
LCTWIST/K



Twistlock  
Photocell  
R-3P-PCT (120-277V)  
RPCT-480 (480V)



Remote for  
Microwave  
Sensor\*  
A17-REMOTE



## Reversible House Side Shields



A17-RHS1  
(up to 150W)



A17-RHS2  
(200W and up)

## Ordering Matrices

### STANDARD A17

Family	Distribution*	Wattage	Mounting**	Color Temp	Driver	Control Options
A17	3T Type III 4T Type IV 5T Type V	70 70W/10,000LM 100 100W/15,000LM 150 150W/22,500LM 200 200W/30,000LM 240 240W/36,000LM 300 300W/45,000LM 375 375W/51,800LM	Blank Universal Pole Mount SF Slipfitter (150W only)	Blank 5000K (Cool) N 4000K (Neutral)	Blank 120-277V, 0-10V Dimming /480 480V***, 0-10V Dimming	Blank No Sensor /3PRS 3-Pin Receptacle & Shorting Cap /7PRS 7-Pin Receptacle & Shorting Cap /MVS Microwave Motion Sensor /LC Lightcloud® Controller****

\* Type II distribution available as special order.

\*\* Wall mount, roadway arm and adjustable universal pole mount available as optional field-installed accessories.

\*\*\* 480V driver available standard on 150W and 300W. All other models are special order.

\*\*\*\* Lightcloud® Controller available only in 120-277V.

### 3-WAY ADJUSTABLE A17

Family	Wattage	Control Options
A17XFU	150	Blank No Sensor /LC Lightcloud® Controller

Note: The A17XFU comes standard with an Adjustable Universal Pole Mount.