




More sizes, more adjustability, more colors!


A17 economy area lights are now so much MORE.

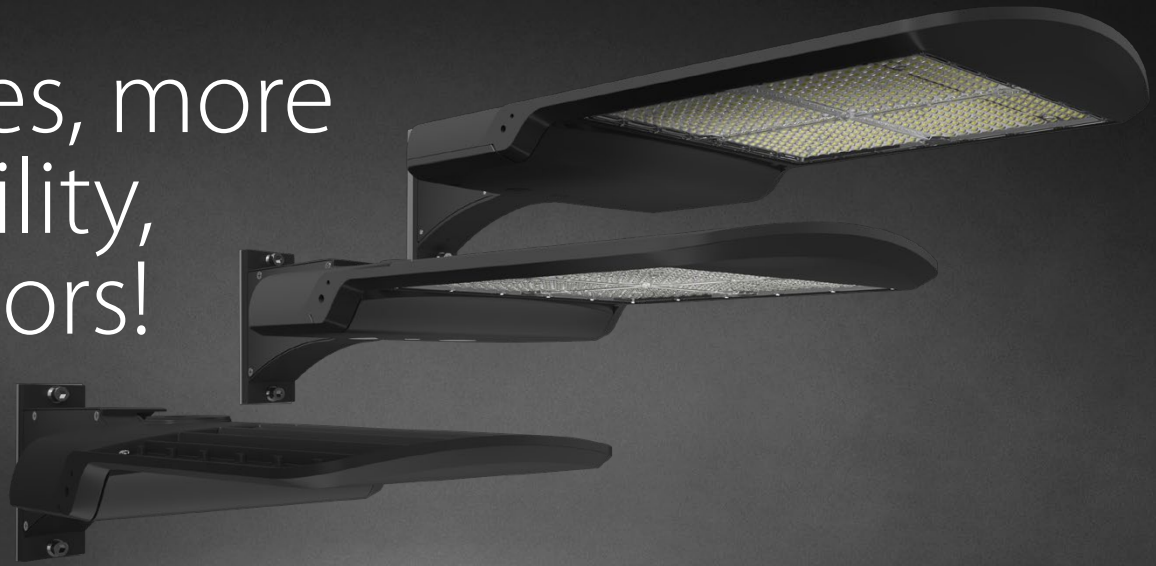

Available from 50W through 480W models, and with four IES distributions and numerous control options, the A17 gives you the right light for the right application, all without breaking the budget.

7 Lumen Packages

The A17 is available in everything from 7,000 lumens to up to 76,300 lumens, while leading competitors only offer up to 5 lumen packages.

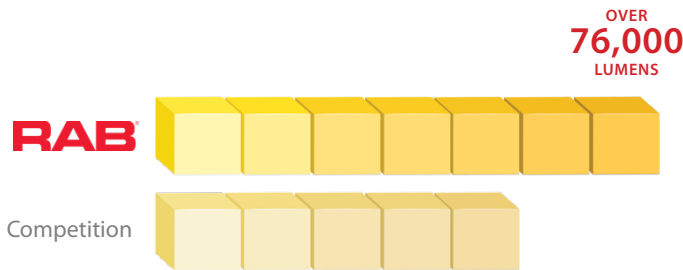

Consistently High Efficacy

Not only does the A17 offer an ultra-high efficacy of up to 175 lm/W, but it delivers high efficacy throughout its entire portfolio.



Mounting Flexibility

With several mounting options available, the A17 can be used throughout various areas for one unified look: parking lots, building façades, adjacent walkways, etc.

OPTIONAL MOUNTING ACCESSORIES




Comes standard with Universal Pole Mount



Wall Mount
A17-WM



Slipfitter
A17-SF-KIT-L
A17-SF-KIT-S-M




Adjustable Universal
Pole Mount
A17-ADJ-KIT-L
A17-ADJ-KIT-S-M



Roadway Arm
A17-RW ARM

3-Way field adjustability

The XFU models of the A17 have three selectable features: 3 selectable wattages, 3 selectable color temperatures, and an on/off twistlock photocell, giving you 18 SKUs in one area light.

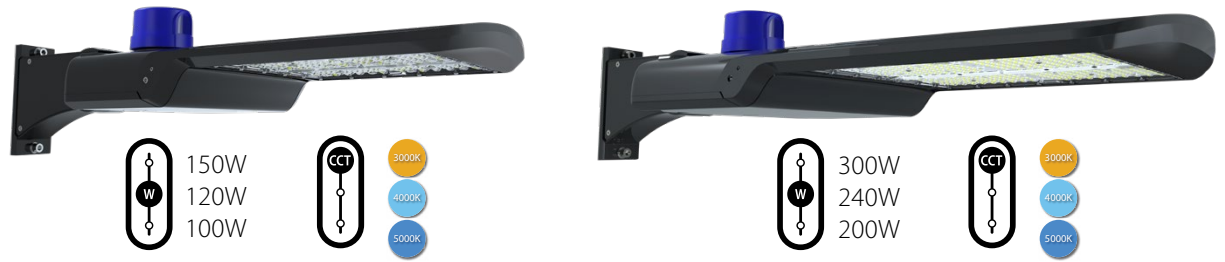

Control Accessories

All A17 models are available with various control options and accessories to help qualify for additional utility rebates.

* Remote control required for managing settings of the microwave sensor (A17 with MVS sensor only).



Twistlock Photocell
R-3P-PCT (120-277V)
RPCT-480 (480V)

Remote for Microwave Sensor*
MSR1

Reversible House Side Shields



A17-RHS-S
(up to 150W)



A17-RHS-M
(200W to 300W)



A17-RHS-L
(375W and up)

Ordering Matrices

A17

Family	Distribution*	Wattage	Mounting	Color Temp	Finish	Voltage Rating	Options
A17							
	3T Type III 4T Type IV 5T Type V	70 70/60/50W 100 100/80/60W 150 150/120/100W 200 200/180/160W 300 300/240/200W 375 375/300/240W 480 480/400/320W	Blank Universal Pole Mount SF Slipfitter (150W only)	Blank 3000/4000/5000K CCT Adjustable	Finish Bronze	Blank 120-277V /480 480V	Blank /3PRS 3-Pin Receptacle & Shorting Cap /7PRS 7-Pin Receptacle & Shorting Cap /MVS Microwave Motion Sensor No Option

*Type II distribution available as special order.

A17XFU

Family	Wattage	Color Temperature	Finish	Voltage Rating	Options
A17XFU					
	150 150/100/70W 300 300/240/200W	Blank 3000/4000/5000K CCT Adjustable	Blank B W Bronze Black White	Blank 120-277V 0-10V Dimming	Blank /LC 7-pin Receptacle & Shorting Cap 3-pin Twistlock photocell included Lightcloud Controller

A17XFU comes standard with Adjustable Universal Pole Mount, 7-Pin Receptacle with Shorting Cap



100,000 HOUR
LED LIFESPAN

IP65
RATING



0-10V
DIMMING



FIELD
ADJUSTABLE



5-YEAR, LIMITED
WARRANTY

RAB's warranty is
subject to all terms
and conditions found at
rablighting.com/warranty