


# RAB®

## A22



FIELD ADJ.



SELECTABLE  
BEAM



Interchangeable optics  
with quality you can trust!  
A22—now with various new options!


### Changing optics has never been easier.

Available in a wide range of models—everything from 50W to 320W—the A22 comes with interchangeable optics that give you the flexibility to change output in the field. IES Type II, III, IV, and V distributions are all available.



### All-in-one maximized versatility.

When you need one fixture to do it all, the A22-150X and 320X deliver. In addition to boasting three selectable wattages and color temperatures, and a twistlock photocell, the X models include three interchangeable lenses (Types III, IV, V) and an adjustable universal pole mount.

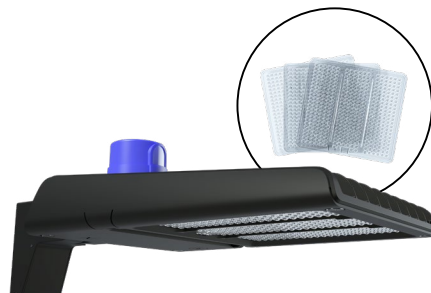

Innovative door design opens/closes with a quick twist and secures the lens against high winds.

### Sensors and controls.

All A22 models come standard with a NEMA 7-pin receptacle but can also be ordered with an integrated sensor to help qualify for additional utility rebates. Standard and Lightcloud twistlock photocells can also be purchased as accessories.

*Note: remote control required for managing settings of the sensors.*





100,000-HOUR  
LED LIFESPAN



5-YEAR  
LIMITED  
WARRANTY


RAB's warranty is  
subject to all terms  
and conditions found at  
[rablighting.com/warranty](http://rablighting.com/warranty)

## Reduce light pollution.

The A22 family is available in static 3000K models that come standard with a non-adjustable pole mount to limit lighting's impacts on the environment. All 3000K models are DarkSky and DLC LUNA certified.



## Accessories



WHITE BRONZE BLACK



### SLIPFITTER MOUNT

A22SFW  
A22SF  
A22SFB




### WALL MOUNT

A22WMW  
A22WM  
A22WMB



### NON-ADJUSTABLE POLE MOUNT

A22PMW  
A22PM  
A22PMB



### HOUSE SIDE SHIELDS

A22-70/100HS A22-150/200HSW  
A22-70/100HSB A22-320HS  
A22-70/100HSW A22-320HSB  
A22-150/200HS A22-320HSW  
A22-150/200HSB

## Interchangeable Optics

	TYPE II	TYPE IV	TYPE V
70 & 100	A22-70/100LENS2T	A22-70/100LENS4T	A22-70/100LENS5T
150 & 200	A22-150/200LENS2T	A22-150/200LENS4T	A22-150/200LENS5T
320	A22-320LENS2T	A22-320LENS4T	A22-320LENS5T

## Controls



Twistlock Photocell

R-3P-PCT (120-277V)  
R-3P-PCT-480V (480V)



Lightcloud Twistlock  
Photocell

LCTWIST/K



Remote Control for  
/MVS and /PIR Models\*

MSR1

\*Remote control required for  
managing settings of the sensors.

# Lightcloud®

## Lightcloud® Blue enabled.

A22 is available with Lightcloud Blue-enabled motion sensing (microwave or passive infrared) which can be configured to adjust brightness and hold time, saving additional energy costs.

## Ordering Matrix

Product Family	Optics		Wattages		Color Temp		Mounting		Finish		Voltage		Options	
A22														
	Blank	Type III	70	70/60/50W	Blank	3000/4000/5000K	Blank	Universal Adjustable	Blank	Bronze	Blank	120-277V,	Blank	7-Pin Receptacle with
	2T	Type II	100	100/80/60W		CCT Adjustable		Pole Mount*	W	White		0-10V Dimming		Shorting Cap
	4T	Type IV	150	150/120/100W	Y	3000K*			B	Black	/480	480V,	/MVS	7-Pin Receptacle with
	5T	Type V	200	200/180/160W								0-10V Dimming		Shorting Cap and
			320	320/280/250W									/LCBS	Microwave Occupancy Sensor
													/LCBS	Lightcloud Blue Enabled
													/LCBS/MVS	w/PIR Sensor
														Lightcloud Blue Enabled
														w/MVS Sensor

A22 Stacking Unit with 3 Lenses and Twistlock Included

### A22 Stocking Unit with 3 Lenses and Twistlock Included

Product Family	Optics		Wattages		Color Temp		Mounting		Finish		Voltage		Options	
A22														
	Blank	Type III Installed, Type IV and Type V included	150X 320X	150/120/100W 320/280/250W	Blank	3000/4000/5000K CCT Adjustable	Blank	Universal Adjustable Pole Mount	Blank	Bronze	Blank	120-277V, 0-10V Dimming	Blank	7-Pin Receptacle with Shorting Cap and 3-Pin Twistlock Photocell

\*Static 3000K models include a non-adjustable pole mount in order to qualify for DarkSky and LUNA compliance.