

RAB®

AL5



Architectural style
both day and night.
The field-adjustable AL5 post top area light.

Refined looks,
serious performance.

The AL5 is RAB's architectural post top solution — built to impress on aesthetic-driven projects without sacrificing the durability specs demand. Available in round or square models and four finishes, it fits seamlessly into any environment.



Black



Bronze



Gray



White





FEATURE PAGE



100,000-HOUR
LED LIFESPAN




5-YEAR
NO-COMPROMISE
WARRANTY

RAB's warranty is
subject to all terms
and conditions found at
rablighting.com/warranty

Dial in the perfect light.

Three selectable wattages and field-adjustable CCT mean you can fine-tune the AL5 on site without reordering.

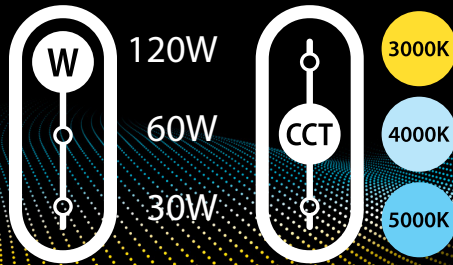

When compliance is critical.

The AL5 is available in IDA DarkSky-approved models with static 3000K light and a Type V Concentrated distribution that keep you compliant with local codes and ordinances.




DarkSky Approved
Commercial Luminaire


Control-ready options.

Optional, factory-installed accessory arms let you plug in photocells* or motion sensors (*standard or Lightcloud Blue*) after installation.

**Includes shorting cap*

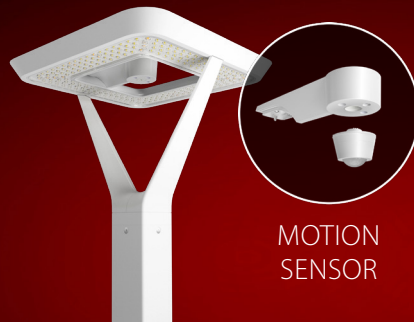


MOTION
SENSOR

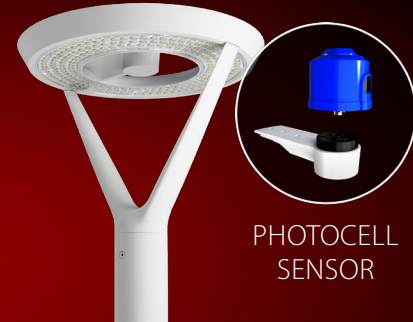

PHOTOCELL
SENSOR

Installation that doesn't slow you down.

The AL5 slips onto a 2-3/8" tenon and is secured with set screws that are easy to tighten but tough to strip during install. The driver module uses a quick-connect system — drop it onto the tenon, slide the fixture on, and electrical connections happen simultaneously.

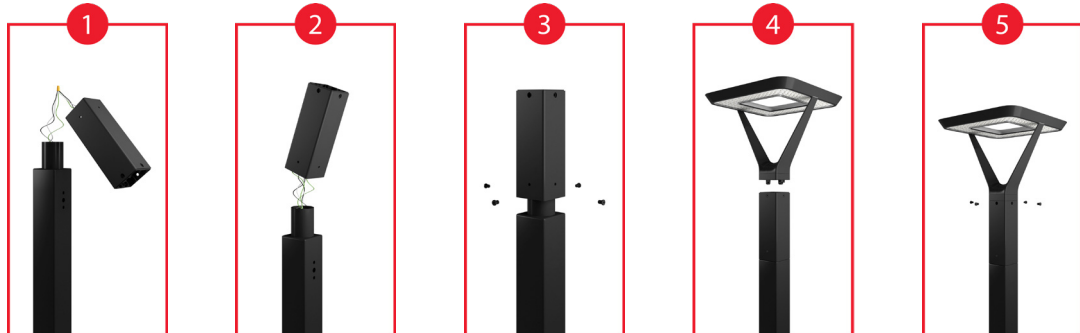

Ordering Matrix

Product Family	Shape	Distribution	Wattage	Color Temp.	Finish	Driver	Sensor-Ready Arm
AL5	Blank S Round Square	Blank C Type V Wide Type V Concentrated*	Blank 120/60/30W	Blank Y 3000/4000/5000K** 3000K*	Blank W B RG Bronze White Black Roadway Gray	Blank /480 120-277V, 0-10V Dimming 480V, 0-10V Dimming	Blank /SA /PCTA Motion Sensor Arm Twistlock Photocell Arm

*C (Type V Concentrated) only available with Y (3000K) color temp, Bronze or Black finish, 120-277V driver, with /PCTA arm
**3000/4000/5000K adjustable color temp only available on Type V Wide distribution