




Maximized glare control.

Field-adjustable wafers with deep regress

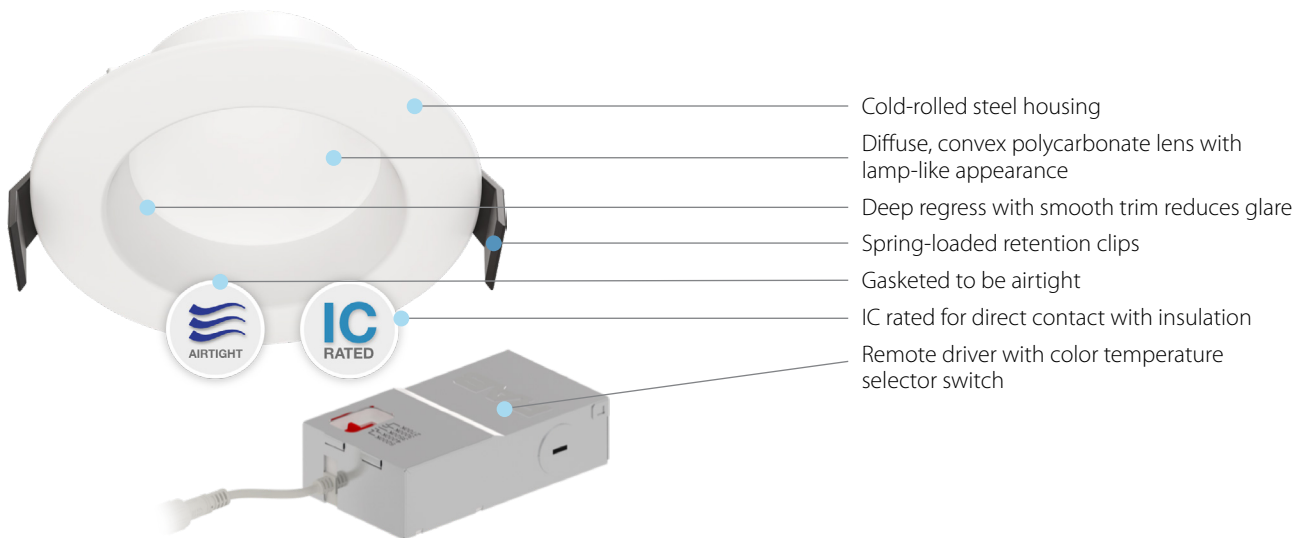

Stays low, goes deep.

Available in both 4" (13W) and 6" (15W) models, the deep regress design of these low-profile wafers delivers maximized glare control. The remote driver makes installations super easy, whether it's in retrofit or new construction applications.





50K-HOUR
LED LIFESPAN



CERTIFIED TO UL
STANDARD 1598



JA8 COMPLIANT




ENERGY STAR



5-YEAR,
NO-COMPROMISE
WARRANTY

RAB's warranty is
subject to all terms
and conditions found at
rablighting.com/warranty

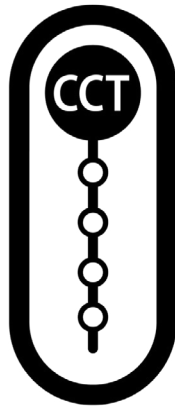

2700K

3000K



3500K

4000K

5000K

Color your world.

These premium downlights are field adjustable and allow you to choose from five color temperatures (2700, 3000, 3500, 4000 and 5000K) with the flick of a switch, giving you the flexibility to customize various areas with one fixture!



Anywhere you want it.

All models are airtight rated and suitable for use in dry, damp and wet locations, making them perfect for both indoor and outdoor use.


What's under the hood.

All models use a 120V driver with TRIAC dimming down to 10%. 90+ CRI comes standard for accurate color rendering.

Additional Accessories.



[Goof Rings](#)

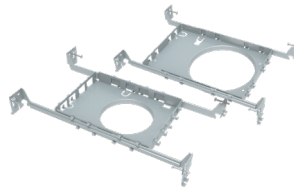

[Mounting Plates](#)



[Emergency Driver](#)

Ordering Matrix

Product Family	Wattage	Shape	CRI/Color Temperature	Voltage	Finish	Trim
WFD	4 6	Blank Round	Blank 90 CRI, Field Adj. 2700/3000/3500/4000/5000K	Blank 120V	Blank White	Blank B Smooth Baffle