


RAB®

Control optics, distribution, and color.

CD34—now in
RGBW models!


Wall Mount

3", 4", and 6"

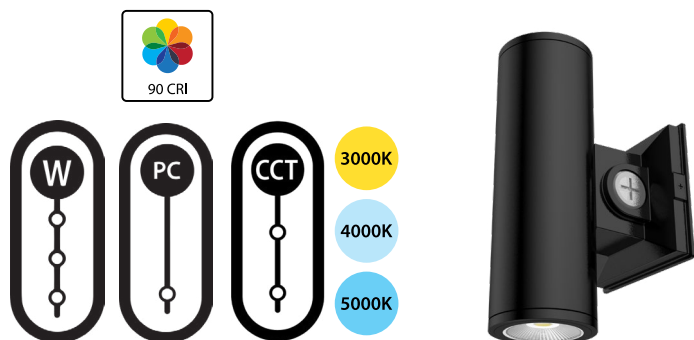

Cord, Surface, and
Pendant* Mount

3", 4" and 6"

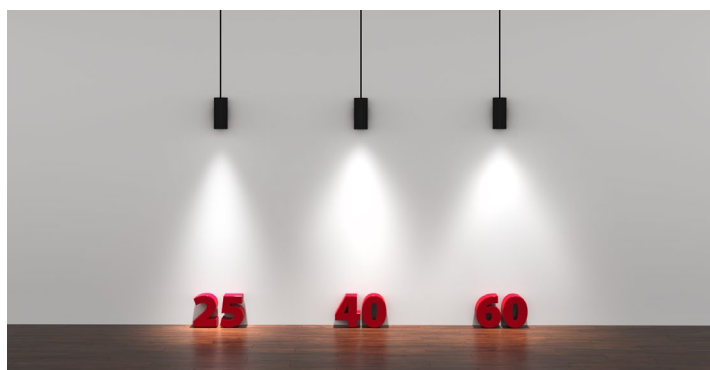



Feature Page



50,000-Hour
LED Lifespan



JAB compliant.



CERTIFIED

CERTIFIED TO UL
STANDARD 1598
AND 844



*NOT FOR RGB
MODELS



*SURFACE MOUNT
ONLY



RAB's warranty is
subject to all terms
and conditions found at
rablighting.com/warranty




The easy switch.

The new generation of CD34 cylinders offers an additional layer of versatility: swappable optics that let you switch between a tight 25° beam, a wider 40° distribution, and an even wider 60°.* Switching them is just a twist away!


*3" models come standard with 25° optics, 4" come with 40°, and 6" come with 60°.

*Accessories are available for all sizes in all three distributions.

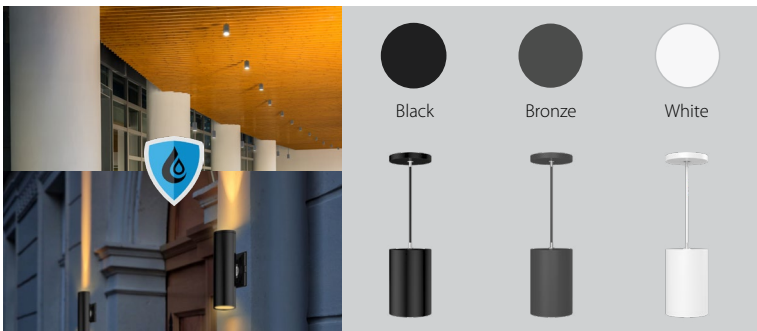

In or out, you decide.

All CD34s are UL listed for wet locations, making them a great option for both indoor and outdoor applications from kitchens, conference rooms and auditoriums, to entryways, façades and awnings.

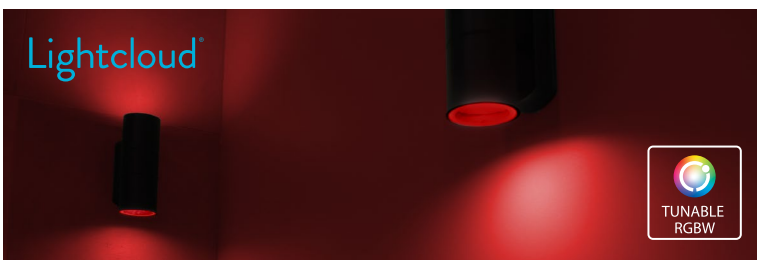

Your world, your rules.

CD34 is available in RGBW models with Lightcloud Blue that let you choose from 16+ million colors for any mood. Tunable white capability is included in those models as well, between 2200K and 6500K.

Accessories

Convert your surface mount cylinders to pendant mounts with these accessory kits, which include four connectable 12" stems and a hang-straight knuckle for angled ceilings.



CD34 models come standard with a clear glass lens but frosted lenses are available for all sizes and color finishes.



Ordering Matrix

Wall Mount

Product Family	Size/Wattage*	Mounting	Light Direction	CRI/Color Temp	Driver	Finish	RGB Color Tuning
CD34	-	W	Blank	Blank	Blank	W K Z	Blank /RGB
	3 4 6	3", 10/8/6W 4", 20/16/12W 6", 36/28/22W	Wall	Selectable (Down/Up/Both)	90CRI, 3000/4000/5000K	120-277V, 0-10 Dimming	None Color Tuning 16+ million colors; [†] Tunable White 2200-6500K

Surface/Pendant Mount

Product Family	Size/Wattage*	Mounting	Light Direction	CRI/Color Temp	Driver	Finish	RGB Color Tuning
CD34	-	SP	Blank	Blank	Blank	W K Z	Blank /RGB
	3 4 6	3", 10/8/6W 4", 20/16/12W 6", 36/24/18W	Surface/Pendant	Down Only	90 CRI, 2700/3000/3500/4000/5000K	120-277V, 0-10 Dimming	None Color Tuning 16+ million colors; [†] Tunable White 2200-6500K

*When /RGB models are ordered, highest wattage will be the static wattage (no field-adjustable wattage).

[†]Only available for 4" and 6" models.

/RGB options require the Lightcloud Blue mobile app to adjust colors.