




New colors and new options!


The field-adjustable CR commercial downlight.

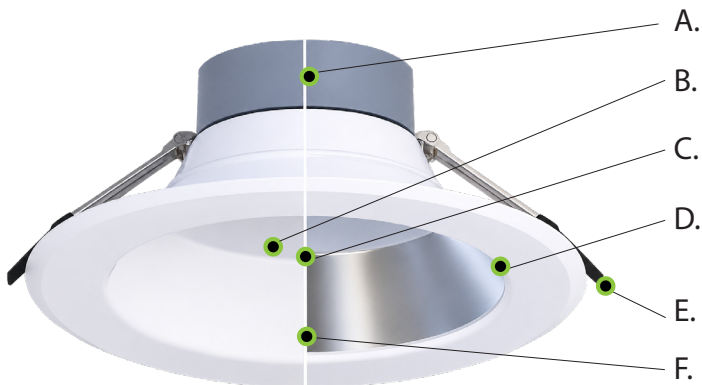

- A. Switches control wattage and CCT
- B. Diffuse polystyrene lens reduces glare
- C. Tight LED binning ensures color uniformity
- D. Spun aluminium housing and trim
- E. Spring-loaded retention tabs
- F. Available with white or haze cone

Stay in control.

These field-adjustable, commercial downlights allow you to change both lumen output and color temperature with the flick of a switch, giving you the flexibility to customize various areas with one fixture! Available in 4", 6", 8", and 10" diameters, they're ideal for both new construction and retrofit applications.





FEATURE PAGE

50,000-HOUR
LED LIFESPAN5-YEAR
NO-COMPROMISE
WARRANTYRAB's warranty is
subject to all terms
and conditions found at
rablighting.com/warranty

Now with universal dimming!

RAB's CR downlight now allows for either 120V TRIAC/ELV or 0-10V dimming control, providing maximum flexibility while minimizing unexpected installation issues in the field. Whether your project is residential, commercial, mixed-use, new construction or remodel, we have you covered.



Anywhere you want it.

All models are suitable for use in dry, damp and wet locations, making them perfect for both indoor and outdoor use.



What's under the hood...

CR has a diffuse polystyrene lens that creates smooth, uniform light and reduces glare without sacrificing lumen output. All models use a 120-277V driver with universal dimming, and produce 90+ CRI for the accurate color rendering often vital in commercial applications.



90+ CRI




Universal Voltage

For life's emergencies.

Emergency lighting is critical for offices, schools, and other applications that need safety measures in place to meet code requirements. All sizes of the CR are available with an offboard battery backup that includes a quick-connector for easy wiring.



Additional accessories.

[Color Trims](#)[Goof Rings](#)[Mounting Frames](#)[Mounting Plates](#)[Emergency Driver](#)

Ordering Matrix

Without Battery Backup

Product Family	Size/Wattage	Shape	CRI/Color Temp	Driver	Fixture Finish	Trim
CR	4 4", 10/8/6W 6 6", 21/17/10W 8 8", 30/24/16W 10" 10", 37/30/24W	Blank Round	Blank 90 CRI, 2700/3000/3500/4000/5000K CCT Adjustable	Blank 120-277V, 0-10V + TRIAC/ELV	Blank HW White Cone, White Flange Haze Cone, White Flange	Blank Smooth

With Battery Backup

Product Family	Size/Wattage	Shape	CRI/Color Temp	Driver	Fixture Finish	Trim	Battery Backup
CR	4 4", 11/9/7W 6 6", 22/18/11W 8 8", 31/25/17W 10 10", 38/31/25W	Blank Round	Blank 90 CRI, 2700/3000/3500/4000/5000K CCT Adjustable	Blank 120-277V, 0-10V + TRIAC/ELV	Blank White Cone, White Flange	Blank Smooth	/E Battery Backup