

Watch your downlight options multiply!

Field-adjustable wattage and CCT keep you in control.

What's under the hood...

Our commercial downlights have a diffuse polystyrene lens that creates smooth, uniform light and reduces glare without sacrificing lumen output. All models use a universal, 120-277V driver with 0-10V dimming, and produce 90+ CRI for the accurate color rendering often vital in commercial applications.




90+ CRI



Dimmable
down to 10%



Universal voltage

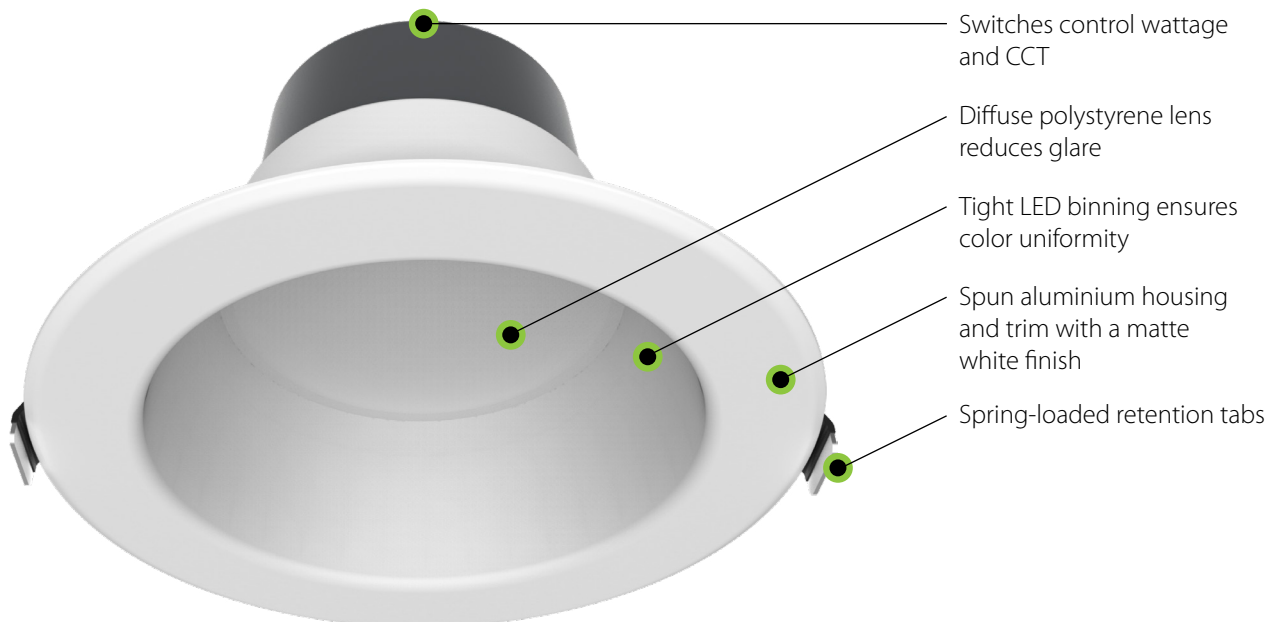



50,000 HOUR
LED LIFESPAN



IC Rated
(12S, 16S, and 22S
models only.)



Airtight



JA8 COMPLIANT



ENERGY STAR



5-YEAR,
NO-COMPROMISE
WARRANTY

RAB's warranty is
subject to all terms
and conditions found at
rablighting.com/warranty


Stay in control.

These field-adjustable, commercial downlights allow you to change both lumen output and color temperature with the flick of a switch, giving you the flexibility to customize various areas with one fixture! Available in 4", 6", 8", and 10" diameters, they're ideal for both new construction and retrofit applications. All models are suitable for use in dry, damp and wet locations, making them perfect for both indoor and outdoor use.



Battery backup compatibility.

The 6" & 8" CRLEDFA are offered with an integrated emergency battery backup driver and test switch. All other sizes are compatible with field-installable battery backup drivers (sold separately). All options offer a minimum of 90 minutes of illumination in the event of a power failure.

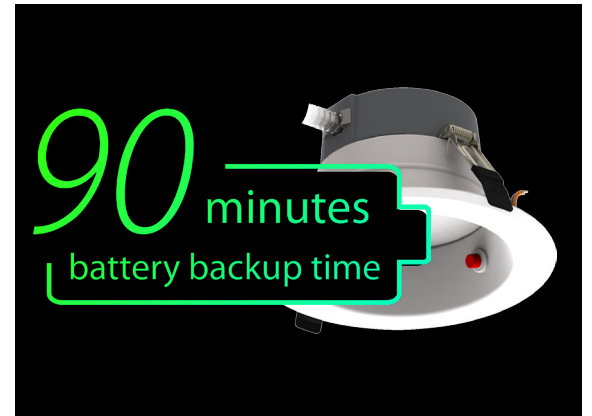

Additional Accessories.



[Color Trims](#)



[Goof Rings](#)



[Mounting Frames](#)



[Mounting Plates](#)



[Emergency Driver](#)

Ordering Matrix

Product Family	Size	Shape	Wattage	CRI/Color Temp	Voltage	Fixture Finish	Trim Finish	Battery Backup
CRLEDFA		R		9CCT	UNV	W	S	
	4 4"	R Round	12S 12/9/7W (4" only)	9CCT 5000/4000/3500/3000K Field Adjustable	UNV Universal Voltage 120V-277V	W White	S Smooth	Blank /E No Option Battery Backup
	6 6"		16S 9/12/16W (6" only)					
	8 8"		22S 11/16/22W (8" only)					
	10 10"		24S 24/19/15W (6" only)					
			33S 33/29/25W (8" only)					
			43S 43/37/32W (10" only)					

Emergency battery backup only available on 6" 9/12/16W and 8" 15/19/24W