




# Watch your downlight options multiply! Field-adjustable wattage and CCT keep you in control.

#### What's under the hood...

Our commercial downlights have a diffuse polystyrene lens that creates smooth, uniform light and reduces glare without sacrificing lumen output. All models use a universal, 120-277V driver with 0-10V dimming, and produce 90+ CRI for the accurate color rendering often vital in commercial applications.

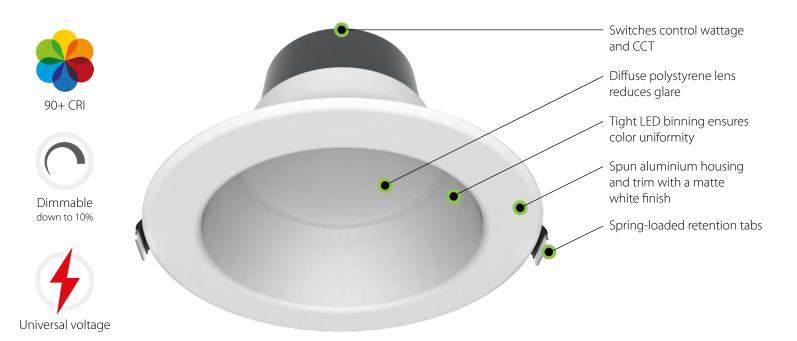





50,000 HOUR LED LIFESPAN



IC Rated (12S, 16S, and 22S models only.)



Airtight



JA8 COMPLIANT





5-YEAR, NO-COMPROMISE WARRANTY

RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty

#### Stay in control.

These field-adjustable, commercial downlights allow you to change both lumen output and color temperature with the flick of a switch, giving you the flexibility to customize various areas with one fixture! Available in 4", 6", 8", and 10" diameters, they're ideal for both new construction and retrofit applications. All models are suitable for use in dry, damp and wet locations, making them perfect for both indoor and outdoor use.

## Battery backup compatibility.

The 6" & 8" CRLEDFA are offered with an integrated emergency battery backup driver and test switch. All other sizes are compatible with field-installable battery backup drivers (sold separately). All options offer a minimum of 90 minutes of illumination in the event of a power failure.





## Additional Accessories.



## Ordering Matrix

Product Family	Size		Shape		Wattage		CRI/Color Temp		Voltage		<b>Fixture Finish</b>		Trim Finish		Emergency	
CRLEDFA	-		R	-		-	9CCT	-	UNV	-	w		S			
	4 6 8 10	4" 6" 8" 10"	<b>R</b> Round	12S 16S 22S 24S 33S 43S	12/9/7W (4" only) 9/12/16W (6" only) 11/16/22W (8" only) 24/19/15W (6" only) 33/29/25W (8" only) 43/37/32W (10" only)		5000/4000/3500/3000K Field Adjustable		JNV Universal Voltage 120V-277V		V White	S	Smooth	Blank /E	k No Option Emergency Battery Backup	

Emergency battery backup only available on 16S and 22S.