



## Watch your downlight options multiply! Field-adjustable wattage and CCT keep you in control.

### What's under the hood...

Our commercial downlights have a diffuse polystyrene lens that creates smooth, uniform light and reduces glare without sacrificing lumen output. All models use a universal, 120-277V driver with 0-10V dimming, and produce 90+ CRI for the accurate color rendering often vital in commercial applications.




90+ CRI



Dimmable  
down to 10%



Universal voltage

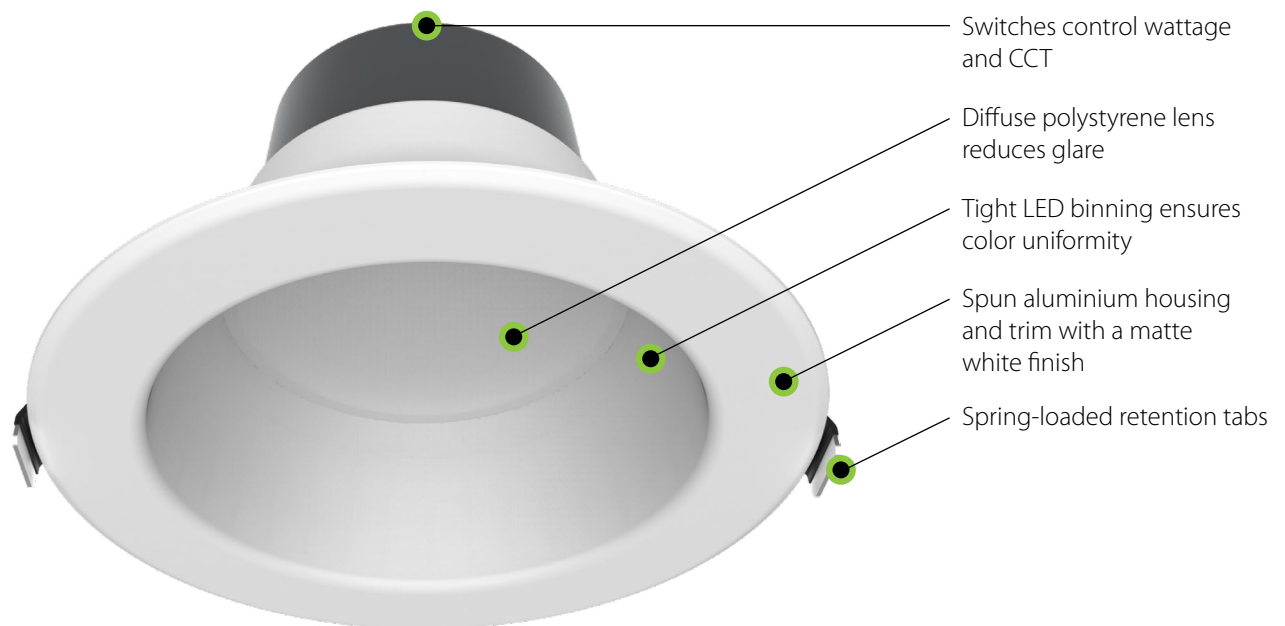



CERTIFIED



50,000 HOUR LED LIFESPAN



IC Rated (12S, 16S, and 22S models only.)



Airtight



JAS COMPLIANT



ENERGY STAR



5-YEAR, NO-COMPROMISE WARRANTY

RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty)


## Stay in control.

These field-adjustable, commercial downlights allow you to change both lumen output and color temperature with the flick of a switch, giving you the flexibility to customize various areas with one fixture! Available in 4", 6", 8", and 10" diameters, they're ideal for both new construction and retrofit applications. All models are suitable for use in dry, damp and wet locations, making them perfect for both indoor and outdoor use.



## Battery backup compatibility.

The 6" & 8" CRLEDFA are offered with an integrated emergency battery backup driver and test switch. All other sizes are compatible with field-installable battery backup drivers (sold separately). All options offer a minimum of 90 minutes of illumination in the event of a power failure.

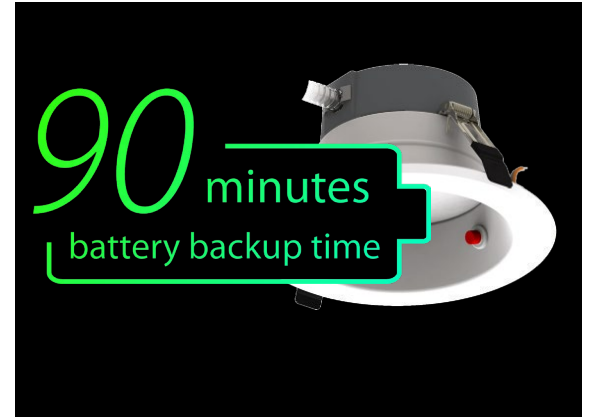

## Lightcloud® Blue enabled.

Available with factory-installed Lightcloud Blue compatibility, for use with our wireless,

Lightcloud®



## Additional Accessories.



Color Trims



Goof Rings



Mounting



Emergency Driver

## Ordering Matrix

Product Family	Size	Shape	Wattage	CRI/Color Temp	Voltage	Fixture Finish	Trim Finish	Battery Backup
CRLEDFA		R		9CCT	UNV	W	S	
	4 4"	R Round	12S 12/9/7W (4" only)	9CCT 5000/4000/3500/3000K Field Adjustable	UNV Universal Voltage 120V-277V	W White	S Smooth	Blank /E No Option Battery Backup
	6 6"		16S 9/12/16W (6" only)					
	8 8"		22S 11/16/22W (8" only)					
	10 10"		24S 24/19/15W (6" only)					
			33S 33/29/23W (8" only)					
			43S 43/37/32W (10" only)					

Product Family	Size	Shape	CRI/Color Temp	Voltage/Dimming	Fixture Finish	Trim Finish	Controls	Battery Backup
CR		R			W	S		
	10 10", 32/37/43W	R Round	Blank >90CRI, 5000/4000/3500/3000K Field Adjustable	Blank 120-277V, 0-10V Dimming	W White	S Smooth	Blank /LCB No Option Lightcloud Blue-Enabled	Blank /E No Option Battery Backup
	8HO 8", 25/29/33W							
	8 8", 11/16/22W							
	6HO 6", 15/19/24W							
	6 6", 9/12/16W							
	4 4", 7/9/12W							

Emergency battery backup only available on 6" 9/12/16W and 8" 15/19/24W