




RAB[®]



These commercial downlights
are more flexible than ever!
Field-adjustable CR, now with universal dimming.

What's under the hood...

CR has a diffuse polystyrene lens that creates smooth, uniform light and reduces glare without sacrificing lumen output. All models use a 120-277V driver with universal dimming, and produce 90+ CRI for the accurate color rendering often vital in commercial applications.

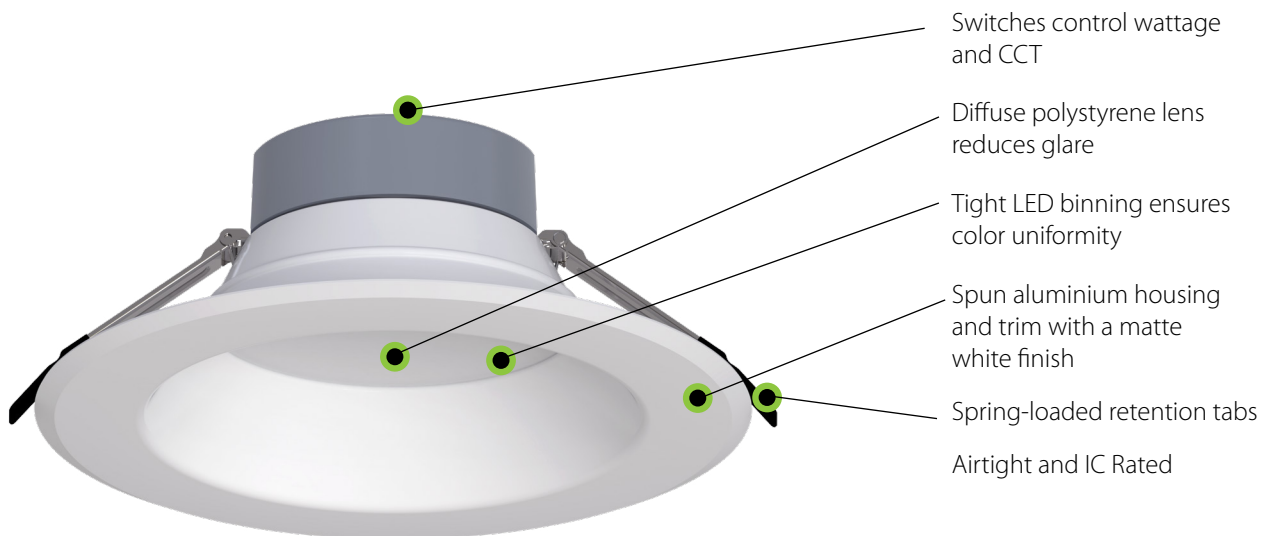



50,000 HOUR LED LIFESPAN



ENERGY STAR



JA8 COMPLIANT



AIRTIGHT



IC RATED



5-YEAR, NO-COMPROMISE WARRANTY

RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty

Stay in control.

These field-adjustable, commercial downlights allow you to change both lumen output and color temperature with the flick of a switch, giving you the flexibility to customize various areas with one fixture! Available in 4", 6", 8", and 10" diameters, they're ideal for both new construction and retrofit applications.




Now with universal dimming!

RAB's CR downlight now allows for either 120V TRIAC/ELV or 0-10V dimming control, providing maximum flexibility while minimizing unexpected installation issues in the field. Whether your project is residential, commercial, mixed-use, new construction or remodel, we have you covered.



What's under the hood...

CR has a diffuse polystyrene lens that creates smooth, uniform light and reduces glare without sacrificing lumen output. All models use a 120-277V driver with universal dimming, and produce 90+ CRI for the accurate color rendering often vital in commercial applications.

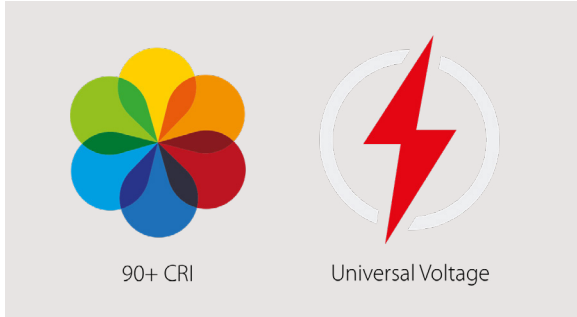

Anywhere you want it.

All models are suitable for use in dry, damp and wet locations, making them perfect for both indoor and outdoor use.



Additional accessories.



[Color Trims](#)



[Goof Rings](#)



[Mounting Frames](#)



[Mounting Plates](#)



[Emergency Driver](#)

Ordering Matrix

Product Family	Size/Wattage	Shape	CRI/Color Temp	Voltage/Dimming	Finish	Trim
CR						
	4 4', 10/8/6W	Blank Round	Blank 90 CRI; Field-Adjustable 2700/3000/3500/4000/5000K	Blank 120-277V; 0-10V+TRIAC/ELV	Blank White	Blank Smooth
	6 6', 21/17/10W					
	8 8', 30/24/16W					
	10 10', 37/30/24W					