

ELX Universal Mount Edge-Lit Exit Sign




ELX



ELXNYC

Thermoplastic Red/Green Selectable or NYC-Compliant Red Lettering, Surface, Wall, Ceiling, or Recessed Mounting



PROJECT: _____

DATE: _____

TYPE: _____

PREPARED BY: _____



KEY FEATURES

- Great for applications requiring an attractive, edge-lit exit sign while remaining budget-friendly
- Provides ceiling, wall, recessed, and end mounting capability, all in one box
- Thermoplastic housing is impact-resistant, scratch-resistant, and corrosion-proof (ELX) NYC-Compliant aluminum housing (ELXNYC)
- Nickel metal hydride battery delivers 90 minutes of emergency capacity. Test switch provides manual activation of 30-second diagnostic testing for on-demand visual inspection.
- 3-year limited warranty

PERFORMANCE

Catalog Number	Housing	Finish	Letter Color	Faces	Panel	Voltage
ELX	Thermoplastic	White	Red/Green Selectable via dipswitch	Single Face, Removeable Chevron Arrows	Clear Acrylic	120-277V
ELX-MP	Thermoplastic	White	Red/Green Selectable via dipswitch	Double Face, Removeable Chevron Arrows	Mirror Panel	120-277V
ELXNYC	Aluminum	Silver	Red	Single Face, Removeable Chevron Arrows	Clear Acrylic	120-277V
ELXNYC-MP	Aluminum	Silver	Red	Double Face, Removeable Chevron Arrows	Mirror Panel	120-277V

MOUNTING OPTIONS

3 Ways to mount included in the box



Ceiling or Wall



Side Mount



Recessed



180° Swivel Panel

ELX Universal Mount Edge-Lit Exit Sign



TECHNICAL SPECIFICATIONS

CONSTRUCTION

Product Type

Edge-Lit Exit Sign

Housing Material

ELX - impact- and scratch-resistant thermoplastic

ELXNYC - robust aluminum housing

Flame Rating

5VA, high resistance to burning according to UL 94 standards

Housing Finish

ELX - White

ELXNYC - Silver

Panel Material

8mm thick acrylic panel provides uniform illumination without shadows or hot spots

Available in clear single face or mirrored double face

Includes removable chevron arrows

INSTALLATION

Installation Orientation

0-180° swivel mounting capability for standard or sloped ceilings

Mounting

Surface Mount - wall, ceiling, sloped ceiling

Recessed Mount - hardware included in box

ELECTRICAL

Input Watts

1.7W

Driver

120-277V

Operating Frequency

50/60Hz

Operating Temperature

32°F to 104°F (0°C to 40°C)

Power Factor

0.4

Battery

Nickel-Metal Hydride

Battery Voltage

3.6V

Battery Operation

90 Minutes

Battery Recharge Time

24 Hours

COMPLIANCE

Listings

UL Listed, UL924 Compliant

Environment

Suitable for use indoors in dry and damp environments

IP Rating

IP20

Illumination standard

NEC and OSHA illumination standards

California Title 20 Compliant

Yes

California Energy Commission (CEC) Status

Lawful for Sales in California

RoHS

Mercury and UV free. RoHS-compliant components

FCC

Complies with Part 15 of the FCC Rules

OTHER

Warranty

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.



ELX Universal Mount Edge-Lit Exit Sign




DIMENSIONS

ELX / ELX-MP Weight: 4.72lbs.

With Recessed Hardware

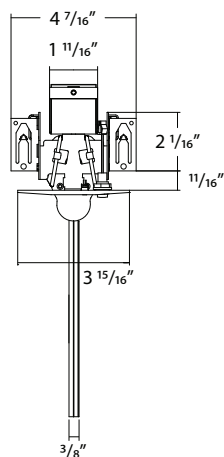
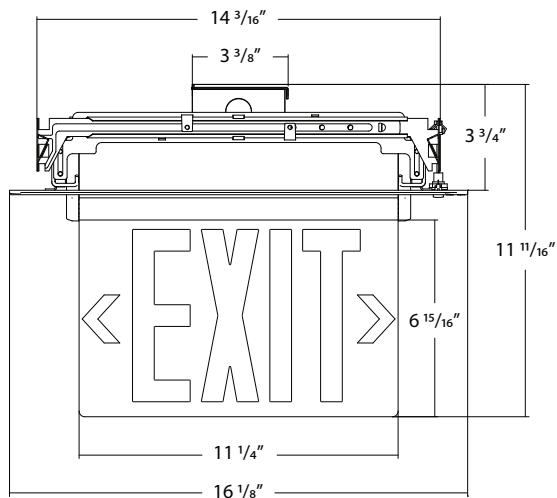


Ceiling or Wall Mount

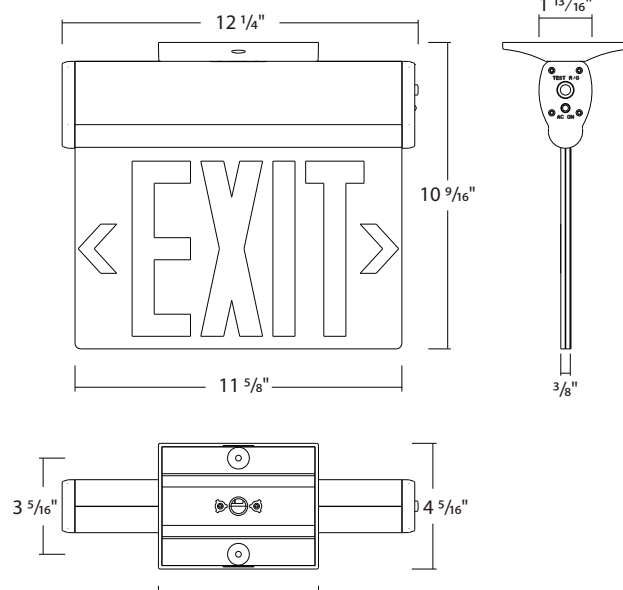


ELXNYC / ELXNYC-MP Weight: 6.22lbs.

With Recessed Hardware

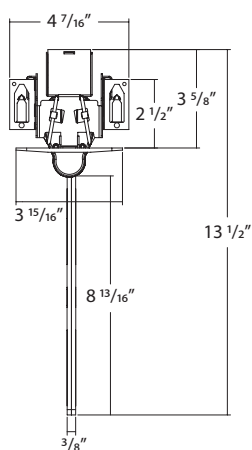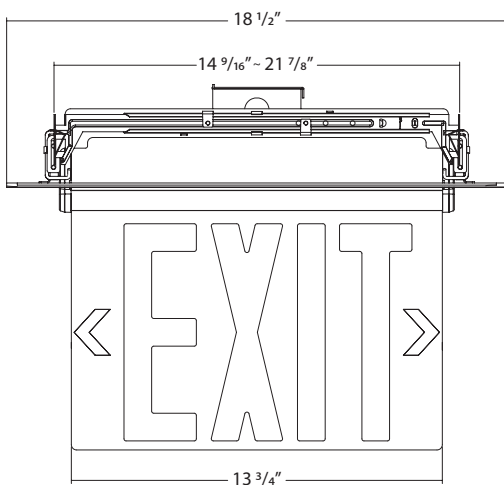

Ceiling or Wall Mount

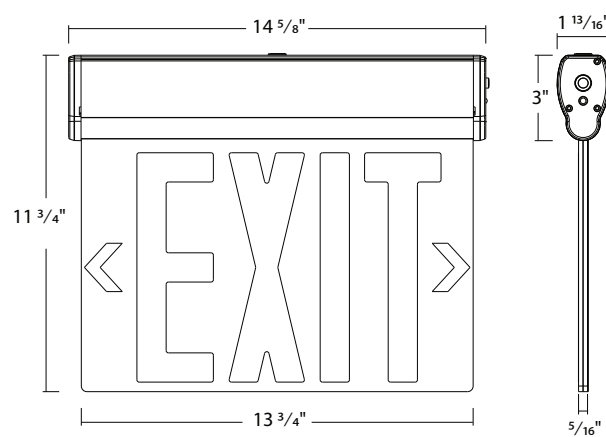

ELX Universal Mount Edge-Lit Exit Sign



ORDERING INFO

Catalog Number	UPC	Case Pack
ELX	192552046213	2
ELX-MP	192552046220	2
ELXNYC	192552046237	2
ELXNYC-MP	192552046244	2

ORDERING MATRIX

Family	Model*	Panel/Faces	Letter Color*	Housing Finish*
ELX Edge-Lit Exit Sign Universal Mounting	<div><div></div><div>Blank NYC</div><div>Standard Thermoplastic NYC-Compliant</div></div>	<div><div></div><div>Blank MP</div><div>Clear Panel, Single Face Mirror Panel, Double Face</div></div>	<div><div></div><div>Blank Blank</div><div>Red or Green Selectable Red</div></div>	<div><div></div><div>Blank Blank</div><div>White Brushed Aluminum</div></div>

**NYC models are only red letters and aluminum finish.
Standard thermoplastic models are red/green selectable and white finish.*